

INDEX

Referring the Lines to the Pages of the Field Notes.

T. 20 S. R. 15 W. Will. Mer.

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	25	25
31	32	33	34	35	36

Meanders of Pages to

Meanders of Pages to

(Vol 15)

00

00

00

TOWNSHIP

TOWNSHIP NO. 31 P. 3 RANGE NO. 12 N. 2 E. 30 MER.

1	2	3	4	5	6
7	8	9	10	11	12
13	14	15	16	17	18
19	20	21	22	23	24
25	26	27	28	29	30
31	32	33	34	35	36

TOWNSHIP NO.

RANGE NO.

MER.

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Index.

Richardson & Jensen
C. Long
Chas. Langlois
James Carman
Wm. Blacklock
J. A. Cox
Earl Jensen
S. D. Merriman
Henry, Drumpriest
C. E. Philbrook
Wm. Daynall
Capt. George
Dennis McCarty
Geo. S. Wilson
Jensen & M. Chrau.
John Mansfield
Miller & Samans
Wm. McClann
Dr. Pander Green
Eason, Sutton & others
A. J. Eason
Walker Sutton
Delos Woodruff (County)
Walker & Willard
Capt. Stohar
Walker of Hamd
Delos Woodruff (County)
Gantlett
Kelley & Stewart
W. D. Fume
Hans Nelson
J. J. Eason
Wm. Wood

Page

7

9

10

11

11

12

13

15 & 23

17

18

19

21

22

24

25

26

27

28

30

31

33

34

35

35

36

37

38

39

40

41

42

43


44

Index.

	Page
Lynnan Woodruff	45
Wm. C. Campfield	47
Wm. C. Miller	48
Manufila of Court	51
Estate of M. Dope	53
Plummer Emery	53
Jesse Cary	54
Court House	55
Wpton (Lot in Port of Ford)	56
M. P. Jurgensen	57
James Warren	58
J. May & Upton	59
J. May	60
Upton & McCaughey	60
Wm. O. Sullivan	61
Peter Elyson	62
Jerry Huntley & others	62
William of God Names	63
" Lot	64
Sibley & others	65
Thos. East	66
John Woodworth	67
Willy Dugh	68
John & Hett	69
Arvill & J. Flako	70
A. H. Miller	72
J. H. Schanck	73
Anton Delinfont	74
Perris Collins	75
Snodgrass	75
Robert Smith	76
Cunningham & Harman	77
Wm. McClellan	77

Index.

Page	
Capt. Hamilton	48
P. H. Egan	48
George W. Harris	49
John Casswell	80
Wm. Vindberg	81
W. H. Smith	82
C. H. Brown	82
Am. ...	83
...	84
...	84
...	84
...	85
...	85
...	86
...	86
...	87
...	87
...	88
...	89
...	89
...	90
...	90
...	91
...	91
...	92
...	92
...	93
...	93
...	94
...	94
...	95
...	95
...	96
...	96
...	97
...	97

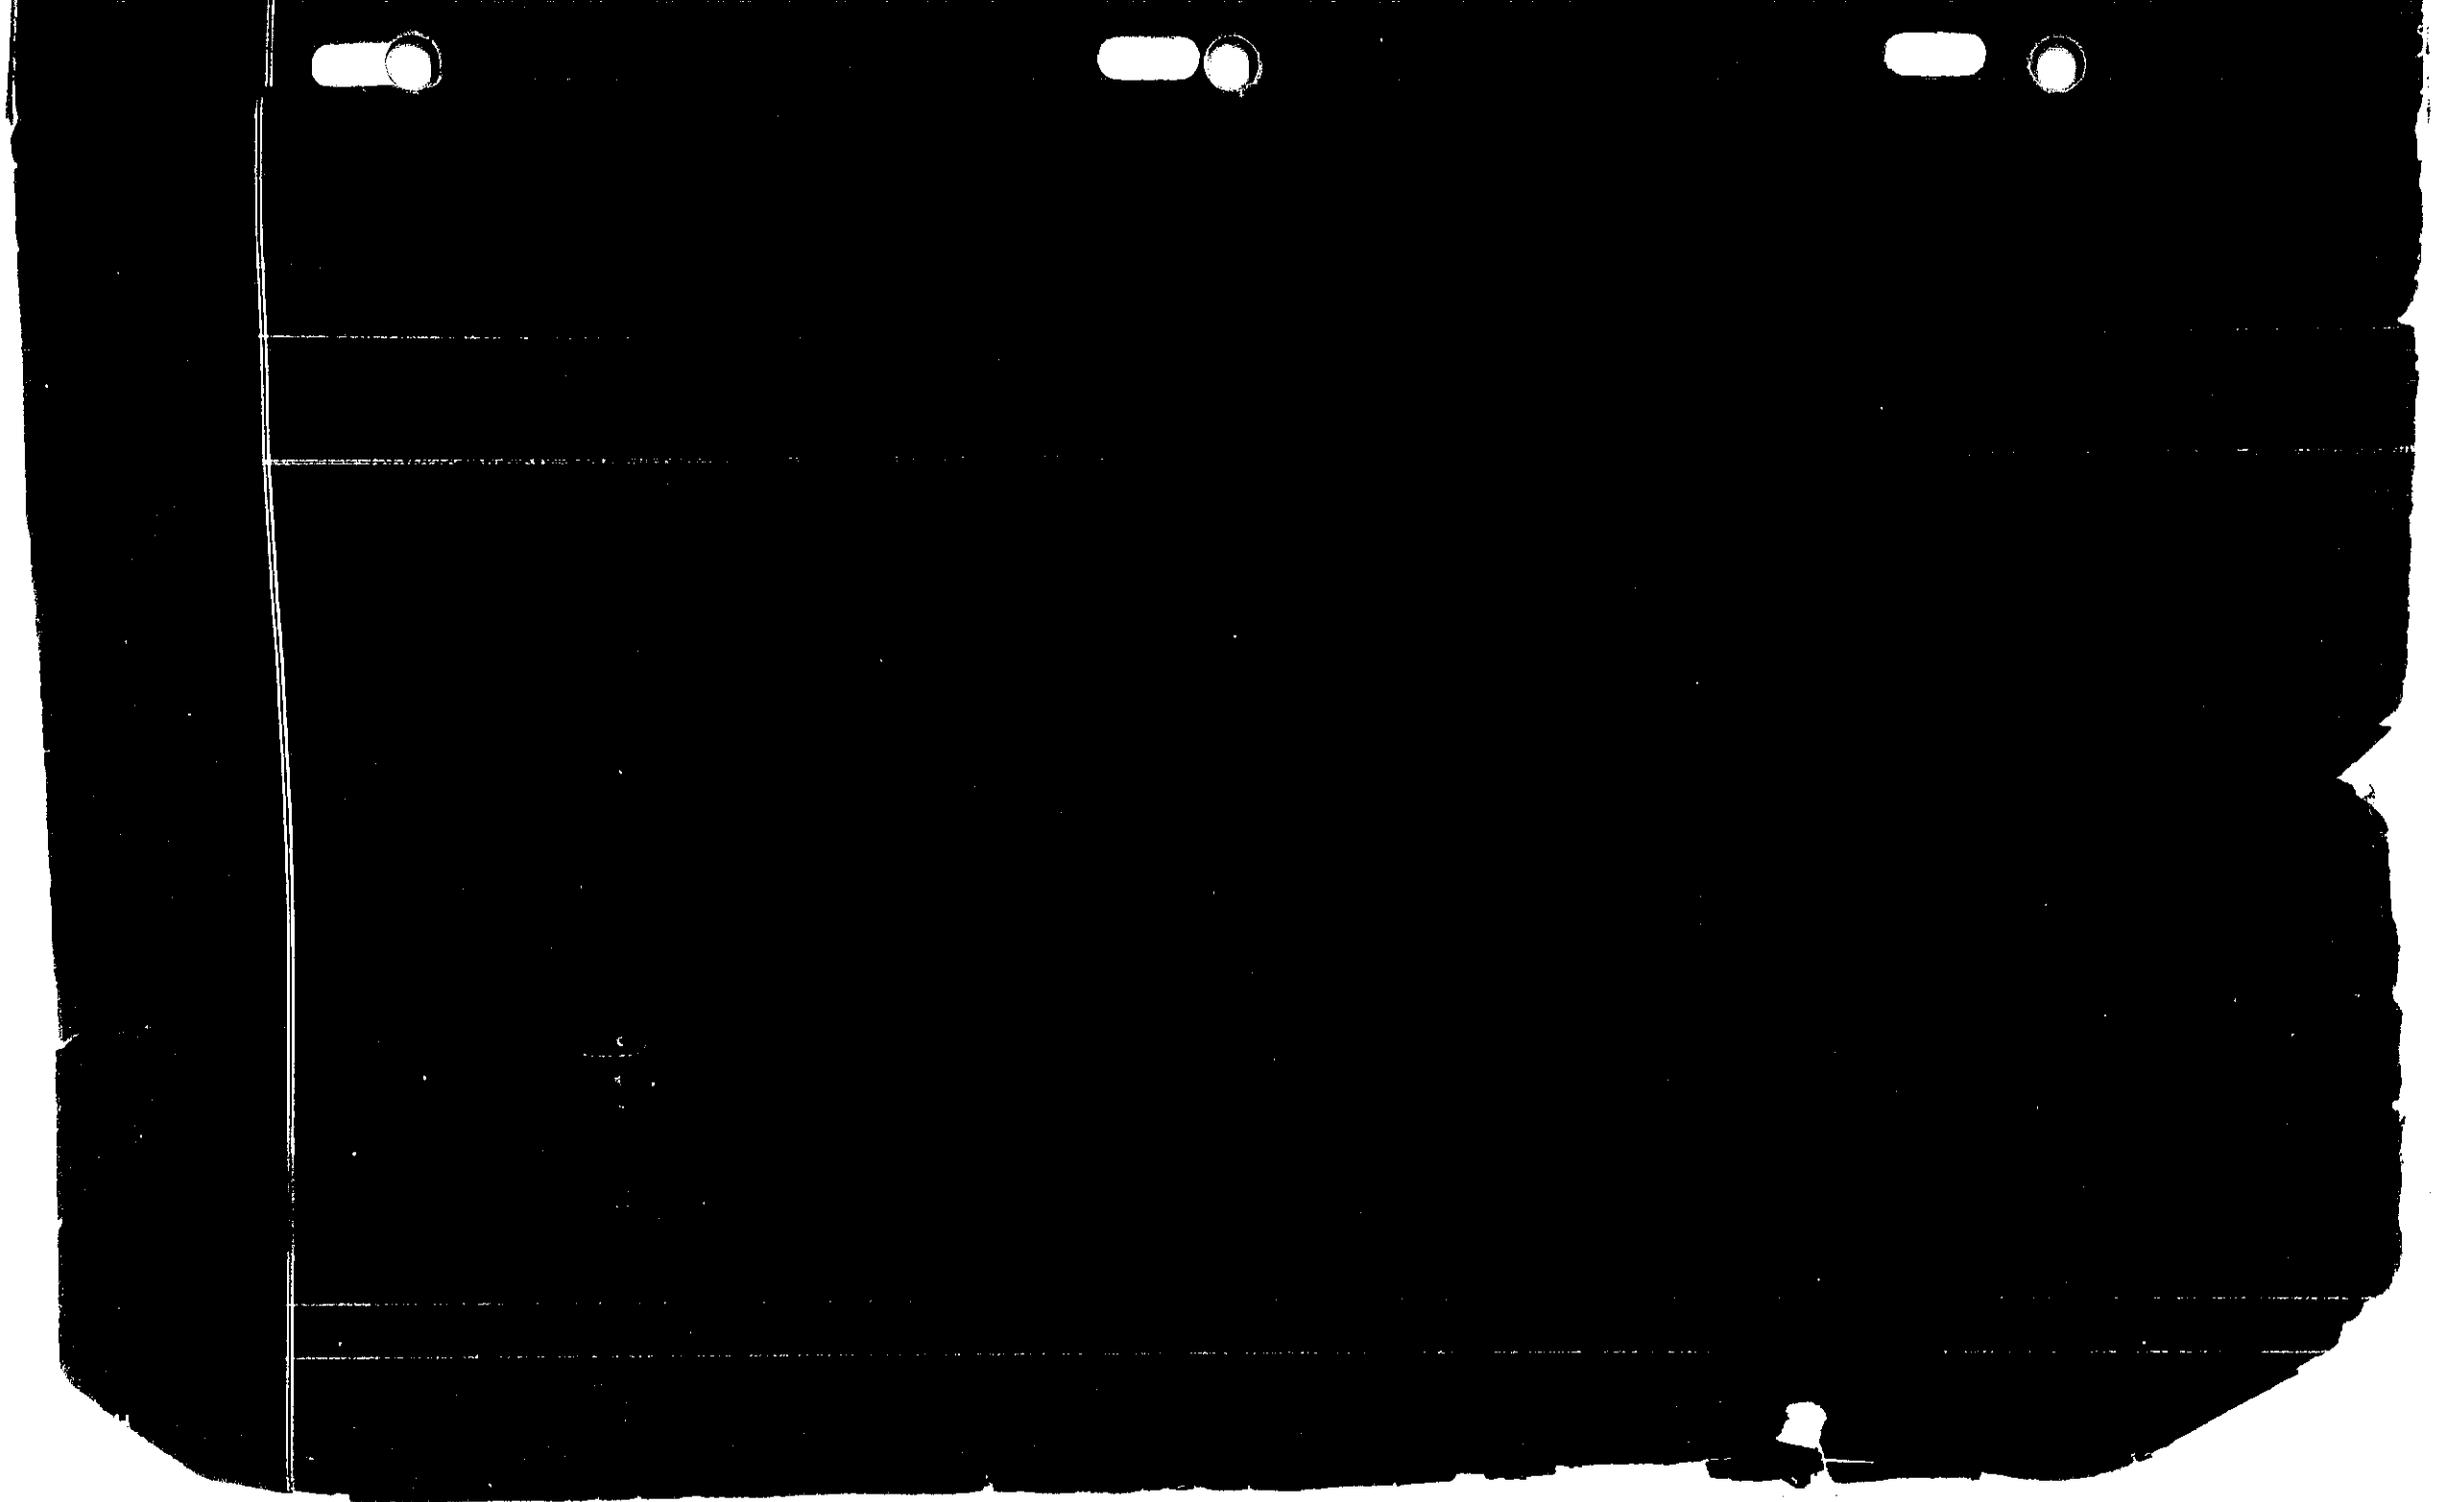

INDEX

Referring the Lines to the Pages of the Field Notes.

T. *R.* *Will. Mer.*

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Numbers of *Pages* *to*

Numbers of *Pages* *to*



INDEX

Referring the Lines to the Pages of the Field Notes.

T. 30 R. 5 Will. Mer.

6	5	4	3	2	1
	8	9	10	11	12
7					
	17	16	15	14	13
18					
	20	21	22	23	24
19					
	29	28	27	26	25
30					
	32	33	34	35	36
31					

Numbers of Pages to

Numbers of Pages to



Township 33 S. Range 15 W

Survey

No. 1 (Tinker & Janson)

Continued

From the Iron Monument at Center of Sec 6

S 17.62 chs. To Center of 5th St. Port of Ford Lake. (Quadrant)

" 21.00 " Iron Monument in Prairie

" 27.50 " Set Instrument to offset.

" 28.87 " To Bluff on Shore of Harbor

Bearings

Thence from offset point (27.50 chs S. of centre of Sec 6

W 24.00 chs. Through high Prairie to a fence

South W 4.50 " Head of a Cove

" 5.00 " Point in Prairie

South W 2.00 " "

" 2.70 " To S. Bay of Sec. 5

South Thence East

East

1.18 chs. To Iron Monument in line between said prairie

Same Point next 2.00 chs to Iron Monument.

From which a pine 16" dia. is N 23° E 16 chs.

(The E & W line not being complete is not S.E.C. 1 & 2)

This is an incomplete Survey and may lie here

after corrected by a more perfect Survey.

July 5th 1878

At and August 10, 1878

P. E. Tinker }
Carshon B. J. }
Chamman }
John P. Houghton }
County Surveyor }

Township 37 S. Range 15 W.

Beavys

Survey No. 2. (C. Long)

We establish the corner to Section 3. N. 33 9 34 by running S 26° W 706 lks from a Willow, and find the two other witness trees agreeing with the field notes of the U.S. Survey. The trees are down and rotted except first one mentioned.

Placed on Sp. Line. between Sp. 39 & 31 S. N. 10° W. Along Thrifts - Pasture fence setting Correction every 5 lks. 17.00 lks. Enter Willow Dumb. (on account of fence we are 2 lks. N. of the line)

- 20.00 " Offset 10 lks S into Lane
- 22.00 " " 5 " N Still in Lane
- 25.00 " " 5 " N
- 30.00 " " 10 " N Enter Swampy Prairie
- 35.00 " " 10 " S. 10 lks from Starting point
- 39.114 " To a point 6 lks N. of 1/4 S. on Salt Slawing on N. bay of Sec. 14 701. bay of Sec. 33

Two witness trees taken Willow 6' dia. 88597 229 lks (one line in the next. 2 1/2 5 1/2 11. 3 1/2 3 1/2 2 all corner.

Whence Lane from corner of 3. 11. 33 9 34

- 20.25 lks End of Lane
- 24.50 " End of Thrifts fence
- 30.00 " Enter Grade 1/4 pole of Thrifts
- 116.00 " To a point. Not finding any stake or witness trees in the vicinity we set a Stake for a temporary 1/4 S. cor.

August 26, 1878

Record Aug. 28. 1878
 Wm. Fitzhugh
 Mod. Mill S
 John Fitzhugh
 Chas. Darvey
 Chairman

Township 30 S. Range 15 W.

Survey No. 4. (James Carman)

Find the SE cor of Sec. 36 - by N 100 p 8 lks.
From a Fir 14" dia to a point and verify by the other
Witness trees.

Retrace the S. bay of Sec. 36 by ranging
the line without chaining to 1/4 S. cor. which I re-
establish from two Witness trees and continue the
line by Ranges to a point 1/4 lks S. of a post
re-established by U. S. Deputy Surveyor Wright
and correct back to 1/4 S. corner -

Oct 11th 1878 - Record Oct 12, 1878

John Fitzhugh
County Surveyor

N 34 S. R 15 W.
Survey No. 5 - (William Blacklocks)

Survey made to cut off 32.70 acres from lot No. 2
in Section 30.

Begin at the SW cor of Sec. 30 Thence
20.00 ds through Semblans to cor. of lot No. 2
Set a Red wood Stake from which

A Pine 8" dia bears N 25° W 18 lks

Thence West on the trail to be Surveyed
30,000 chs. To end of vegetation on beach
Set a Stake at 30 chs. Nothing to mark

Thence

N 28° E 13,68 chs. Along shore. To a point set a Stake. Thence

East 25,110 " Set a Stake. Pin 8" dia. N 67° E 27 lks

South 11,95 " To Beginning Pt. of trail to be Surveyed

Oct. 25. 1878 - Record Nov. 10. 1878

John Fitzhugh
County Surveyor

Township 31 South, Range 15 West.

Bearings	Survey No. 6	(J. A. Cox, Homestead)
North		Begin at the 1/4 S. Cor. S. 1/4 of Sec. 1 10.50 chs. Through maple bottom to Creek Pass 100 chs wire - angle at flag 161.35 Dist. over 339 chs. + 10.50 = 13.89
"	13.89 "	To opposite shore -
"	15.00 "	Begins to ascend the hill, & crossing
"	20.00 "	S. End of big rock 40 chs wire
"	22.00 "	N " " " 100 "
"	23.00 "	Gulch Course S.E.
"	26.50 "	Deep Gulch Course S10° E Enter Prairie
"	40.00 "	Set a temporary post
West	4.60 chs.	Effect to run in Prairie
West	37.50 "	To a point
East	4.00 "	To true S. of 1/4 S. Cor.
"	1.00 "	Thence to true post 2.06 chs } The true course of the 1/4 S. Cor is 1.12 chs
"	1.12 "	Set a post for center of Sec. 1
"	1.12 "	Thence to true S. of 1/4 S. Cor. (No witness)
South	2.90 chs.	Fence S10° E
"	17.50 "	Enter timber E & W
"	20.00 "	Head of a gulch runs S.
"	25.00 "	Leave the gulch to the East
"	30.00 "	Point of a spur slopes SE
"	34.90 "	1/4 S. Cor. Creek
"	37.42 "	Opposite shore
"	39.87 "	Intersect S. 1/4 of Sec. 1

Township 31 South, Range 15 West.

Survey No. 6

J. A. Cox, *Continued,*

Set a 1/4th post from which
 are 400 9" dia. lines West 27 lks.
 Description of the Homestead of J. A. Cox
 { E 1/4 of SW 1/4 of Sec. 1 & NE 1/4 of NW 1/4 &
 NW 1/4 of NE 1/4 of Sec. 12 }
 January 31, 1879 - Recorded July 5th 1879
 John Washington
 County Surveyor

Township 33 South, Range 15 West.

Survey No. 7 - (Carl Jensen)

Survey of the land outside of the meadow line in front the NW 1/4 of Sec. 5.

Bearings
 Case (Re-established the corner to fract. Sec. 5 & 8 - Hence
 3.50 chs. Set a flag on rocky spur (for triangulation)
 Then run meadow line from the C.M. of Secs 5 & 8

N 20 1/4 4.68 chs In quarry fire timber

N 80 1/4 5.60 "

N 60 1/2 4.35 " Across the head of Miller's Cove

S 87 1/2 9.00 "

S 65 1/2 2.81 " To S.E. cor. of NW 1/4 of Sec. 5

From a point S 20 W of East corner of 4th Course run line S 77 1/2 W 200 lks
 - Angus with horse & C. Exterminator Angle with Box W. Exter.

Station A 96' 2 1/2' Hook on center line of Sec. 5 Station A, 56' 25'

B 74° 30' S. Exposed in Cove " 10 580

C 57 1/2 - Flag 9 mi. S. by of Sec. 5 " C 114

Which gives 16.56 acres (Jensen *Continued* 1879/1880)

Township 33 South Range 15 West

Beavero

Survey No. 7 (Continued) (Carl Jensen)

Survey to Establish Jensen's N.W. Corner

From the White post on line between Secs. 8 & 6
 81.50 chs S. of Sec. Cor. Offset 200 Ws. East
 to keep out of Water - Runes South
 8.50 chs To a point 200 Ws. E. of N.S. Cor.
 16.06 " To a point 53 Ws. E. of White to $\frac{1}{4}$ S. Cor.
 18.00 " Offset 200 Ws. W. across center of original
 27.56 " White 200 Ws. W. across center of original White line
 18.50 " At a Stake marked C.S.T.S. for Jensen's
 N.W. corner from which a line is dia
 gonal N 81° E x 586.20' E from a point
 50 Ws. N. of Corner

March 17, 1877 - Measured March 21st & 1877

John Fitzhugh
 County Surveyor

Township 36 South, Range 14 West.

Bearings
Survey No. 8 (S. D. Merriam)

in Section 16

To divide Section legally by a North and South Line -

North on a Rancow from the 1/4 Sec. Cor on the S. bay of Sec. 16. (Verify the cor. by notes of the U.S. Survey)

7.75' Chs. Center timber E 94° W

20.00 " Through timber to a point 39 Chs E of a 1/4 1/4 post by Mr. Colbrook

21.00 " Set the Sun and find any course, by Saks's eqs. N 28° E

(Continue in straight line)

22.50 " Spur Slight West into bottom

23.00 " Set a Flag on N. Side of Summit of Spruce.

An deterring swamp prevents

chaining the line further.

(Proceed to a Station N. of Merriam's face

and on the going line, from which

Turn at Base at c. 42'. Angles with line

Exactly 95° like to a point from which

Angle of 180° of Flag on Spur is 74° 30' to a Flag 15° 17'

" " " " S. corner. 66° 34' to a P.S. C. 28° 26'

from the Station N. of Merriam's field 1/4 S. Cor. Run N 0° 48' W

Which gives the following distances -

From the S. bay of Sec. 16 to Flag on hill 23.00 Chs

" Flag on hill to top. R. of Merriam's field 34.77 "

" Top. N. of Merriam's field to 1/4 S. Cor 21.00 "

distance across the Section 79.87 "

To 1/4 S. Cor. N. of 1/4 Sec.

The above line is N 12° 8' E Intersects M. bay of Section

41 Chs. E of 1/4 S. Cor. runs a Stake at the Station N. of

Merriam's field for future operations

March 31st 1876

(continued next page)

Township 36 South, Range 14 West

Beavings
 Survey No. 8 - (S. D. Harriman)
 In Sec. 16
 Re-established the 1/4 S. Cor.
 on the E. bay of Sec. 16, by running S45°W
 180 lks, and wafly by a line as per notes
 Town this corner the Station N. of Harriman's is N 65° W
 Thence North
 West 12.80 Chas The Sta. N. of Moss field is N 82° 1/4 W
 " 33.50 " Re-established the Pecunia Cor.
 on the left bank of Rogue river
 New witness marked 16" N 81° 08' 19" W
 (No witness trees found)

Thence measured, by notes of Geo. Lantry

S 7 7/8 W	9.00	Chs
S 7 0' W	8.42	"
S 6 8 1/2 W	7.11 1/4	"
S 6 4 1/2 W	12.11 1/4	"
S 4 6 1/2 W	5.52	" set a temporary post
S 4 5 1/2 W	6.10	"
S 3 2 1/2 W	12.48	"
S 3 8 1/2 W	5.60	"
S 3 1 1/2 W	18.76	"
S 4 2 1/2 W	2.50	"
S 4 0 1/2 W	6.50	"
S 3 2 1/2 W	15.00	" intersect the E. bay of Sec. 16 at new point.

Ap. Measure post remaining
 Length of S. bay of Sec. 16 by W. Survey 74.28 Chs
 Doubts having arisen whether Section 16
 should be divided by a N 70° line or by a line
 from 1/4 S. Cor to 1/4 E. Cor and as a line run North
 would intersect the N. bay 150 lks West of the
 1/4 S. Cor. This survey is suspended for instructions.
 March 8th 1879 - Recoran April 15th 1879
 John Fitzhugh Co. Surveyors

Thence a line

No. 9 Township 26 South Range 14 West.

Survey No. 9 (Henry Armstrong)
 Begins at the 1/4 S. Cor. between Sections
 219 & 220. Standing and agreeing with notes of U.S. Survey
 Thence South
 6.00 Chs. Crank Course West
 15.00 " Spur Slopes West
 17.50 " " " "
 20.00 " Set Temporary 1/4 1/4 Cor
 25.00 " Steps Spur Slopes West
 38.50 " N.E. bk. of Mill Crank
 39.90 " Over Crank to Corner of Sec. 21, 22. 27928 - 66 -
 Cited by notes of U.S. Survey.

~~Thence Eastward 35° Slope~~
 5.00 Chs. Summit of Spur Sloping SW
 9.00 " Enter Prairie N.E. 1/4
 15.00 " Spur Slopes South
 20.00 " Set a 1/4 1/4 Cor from which
 Oak 10" dia. N 86° 40' E 25 - 660
 Fir 25" " S 81° 18' 12" "
 Thence South without chaining across
 hill about 20 chs. to the Crank
 April 1st, 1879 - Recorded April 15th 1879
 (Impulse Survey) John Fitzhugh
 County Surveyor

Thence Eastward 35° Slope
 5.00 Chs. Summit of Spur Sloping SW
 9.00 " Enter Prairie N.E. 1/4
 15.00 " Spur Slopes South
 20.00 " Set a 1/4 1/4 Cor from which
 Oak 10" dia. N 86° 40' E 25 - 660
 Fir 25" " S 81° 18' 12" "
 Thence South without chaining across
 hill about 20 chs. to the Crank
 April 1st, 1879 - Recorded April 15th 1879
 (Impulse Survey) John Fitzhugh
 County Surveyor

Township 36 S Range 14 W.

Beavins

Survey No. 10. (6. E. Philbrook)

Begin at the $\frac{1}{4}$ corner 19.98-cls
south of the corner of Secs. 21, 22, 27 & 28

Thence West

6.50 ch. of hill Creek bottom

8.00 ch. Mill Creek 50 yds wide Course NW

Mr. Philbrook's House S10°E

16.00 " Foot of hill 50 Slope

20.00 " Set a stake for $\frac{1}{4}$ corner from which

A line to 50' dist. bears East 39. cl. to

The tree is marked by two marks 15'

apart with a blaze between them.

This is an imperfectly located corner and may
be changed a little when a complete survey is
executed

April 2 1879 - Recorded April 15th 1879

John F. Hughes

County Surveyor

Township 26 South, Range 15 West

Tracing Survey No. 11 (William Bagnell)

Survey to locate Reservoir ditch
Tunnel constructed for mining purposes

Original the 1/4 Sec. Cor. between Sec. 6
T. 26 S. R. 14 W. & Sec. 1 E. 26 S. R. 15 W.

Traverse North

2,500 Chs. Supply Stream of Reservoir Course West
5,600 " To a point on hillside

Traverse West

1,700 Chs. Buck fence nearly N.W.
14,000 " Center Small Pine timber
8,200 " Point on a Wagon Road N.W.S.
Traverse S 88° 43' W

S 88° 43' W 1,570 Chs. A Gate in a fence E & W

" 1,770 " The center of a small bridge over outlet of Reservoir

From the outlet of the Reservoir a ditch carries the water N 87° 30' W to the entrance of a tunnel through the Coast Sand ridge. The present level of the water at the outlet of the Reservoir is 8' 7" below the top of one of the old scattered upon which the original flume was placed. The tunnel through the Coast Sand ridge bears N 87° 30' W to its outlet at the beach, and is immediately under the cut of the old ditch.

From a point N 87° 30' W of the outlet of the Reservoir on the Coast Sand ridge, run a line at N. E. angles (N 2° 30' E) 900 Chs. - Angle at Reservoir 10° 25'. Making distance 15 Chains - Measure 30 Chs. to outlet of Tunnel which added gives 5,500 Chs. from Reservoir to the Tunnel's discharge at the Beach. The Tunnel is about 65' higher than the ocean beach.

Township 26 South, Range 15 West

Bearings

Survey No. 11 (Williams Dagnell)

From the west end of the Tunnel
The old Fleming Cabin bears S 13° W about 150 chs

Line from the center of the bridge in the
Reservoir -

S 22° 4' W

4.70 chs Along the wagon road

S 45° E

2.65 " " is a ditch tapping the stream
upon which the Reservoir is
located, and about 40' or 50'
higher than the outlet of
the Reservoir -

The general bearing of the ditch from
the road to the Reservoir's beach is S 45° W

From the tunnel's discharge on the
beach, the head N. of Kelly's Cove bears
N 48° W about 10 chains. Reef North
of Kelly's Cove N 48° W about 20 chs.

The beach and bluff S. of Kelly's
Cove bears S 18° 30' W. E. extremity of Otter
Point S 23° 30' W. A rock on the beach
on the E 9 W line dividing Section 1 bears
S 38° 30' W

April 3^d 1879. Resurvey April 15th 1879

John Fitzpatrick
County Surveyor

Township 32 South, Range 15 West

Branch

Survey No. 13. Dennis McCarty

Made to establish the S. bay of Claim
No. 410 (James de Torrey)

West on S. bay of Claim 39 from the

S.E. corner of the claim.

12.75 chs. Steam 30 chs. wide Course North

32.50 " To N.E. cor. of Pl. 40. Face No.

Witness trees or monument Set a

Stake from which A blump of

Red berries each 8" dia. low S 65. E 8 Chs. dia.

Lines S. on E. bay. of Claim 40

4.25 chs. Slough 50 lbs. wide Course S 70. E

6.00 " Same Slough " SW

9.35 " Elk Run Course West First Channel

12.55 " " " "

13.57 " Opposite bank on Island

17.35 " S. Shore mainland

21.00 " Center Clearing

40.00 " Set a post for S.E. cor of Claim

(No tree to mark)

Hence West on S. bay of Claim

West 9.60 chs. Branch Course N 50. W

12.13 " McCarty's N.E. Corner

Witness - Area 8" dia. S 12. E 45 lbs.

And Continues West to the Coast.

May 20th, 1879. Recorded May 23, 1879

John Fitzhugh

County Surveyor

Department of the Interior,

General Land Office,

R. O. S. D.

Washington, D. C. May 16th, 1879.

John Fitzhugh Esq,
Port Orford, Curry Co.,
Oregon.

Sir,

In reply to the inquiry in your letter of the 28th ultimus in regard to the proper method of subdividing Section 16. Township 36 South Range 14 West into quarter-sections I have to state that the course to be pursued is to run straight lines from the quarter section corners to the opposite corresponding corners, and the point of intersection of the lines so run will be the legal centre of the section.

Very respectfully,



Commissioner.



Township 26 South, Range 14 West

Bearings

Survey No 14 (S. D. Merriman) from page 10
Addenda to Survey No. 8, which

I find the 1/4 S. Corner on the N. bay of Section 16 agreeing with field notes of US Survey. I therefore proceed to establish a right line 179' between the 1/4 S. Corners.

Set a permanent monument 29' W. West of the Station North of Merriman's fence. Drive a brown iron nail take the following bearings from it:
West End of Rock in view 10° 20' to the N.E. Angl with line

Course "	"	Same	12° 31'	"	N.E.
"	"	"	12° 45'	"	N.E.
"	"	"	65° 48'	"	N.E.

Distance summit of Rock and 65° 48' this point is 577.77 chs N 14° 48' from the 1/4 S. Cor. on the S. bay of Sec. 16.

June 2 - 1879. Secured July 1st 1879.

In attestation of instruction from Commissioners of the Land Office
John Fitzhugh
County Surveyor

Township 34 South, Range 14 West.

Bearings

Survey No. 15 (Geo. S. Wilson)

To find the amount of Acres in front of lots 2, 3 & 4 in Sec. 19 and lots 1 & 2 in Sec. 30 -

Begin at the $\frac{1}{4}$ S. Corner between Sections 29 & 30 - Three feet

18.55 chs to the meander line. Proceed from running it out by the water

to the land in front of lot 2 Sec. 30

From the meander post corner of Secs. 19 & 30 around the land as follows

N 90° E	43.00	chs	To low water mark
N 24° W	4.50	"	
S 70° W	8.75	"	
S 70° E	9.90	"	
S 10° N	33.10	"	To a point 150 chs back of the starting point
S 25° E	41.30	chs	
N 30° W	4.00	"	at place of beginning

The bearings as follows

In front of lot 1 Sec. 30	.30	Acres
" " " 4 " 19	2.50	"
" " " 3 " 19	1.82	"
" " " 2 " 19	1.46	"
Total	5.08	"

Jan 7th 1879 - (Survey July 1st, 1879)
 John Fitzhugh
 Surveyor

Township 33 South Range 18 West

Beaumont County Survey No. 16. Jensen & Brown
To establish S. half of Sec. 5.

Begin at the meander post corner of
Secs. 5 & 8. We - mark the witness trees to wit:

- Pine 25" dia. S48°W 101 lks
- " 18" " N70°W 82 "
- Fir 8" " S35°W 6 "
- " 4" " N48°E 5 "

Thence West between Secs. 5 & 8

618 chs. Leave timber at brink of bluff 88 fms
Set a flag and go around the Cove to
a rod on line.

Run a line N58°E 225 lks

Angle at flag 132°20'

Conceded 13 217 lks Nat. Ont. 422

Distance 863 + 613 = 1476

1476 chs. To slope of hill on W. side of Valley Cove

1900 " Grassy opening highest point on Valley Cove

2400 " Virgin descent, Outer Point

2700 " To a point where proceed to re-establish the
W. cor of Sec. 5 by running S65°W 220 lks from

A pine marked for witness tree and set a stake
from a pine 8" dia. - 183°E 164 lks to same point.

New witness tree - Pine 6" dia. N26°W 12 lks.

The terminal point of the line bears N60°E 92 lks from
the corner. Lat 46 lks deep. 80 - Making the length

of the line 28,30 chs & 46 lks, reflecting N. from W. Survey

Correct by moving the line at 19 chs. 31 lks South

Jan 25th 1879 - Recorded July 1st. 1879

John Fitzhugh
County Surveyor

Township 36 South, Range 14 West.

Survey No. 17 (John Mansfield)
 Land sold to Lewis.

Begin at the NW corner of Lot No. 2 in
 Section 16

Thence

N 63° E 5.70 Chs 376 feet "

S 1° 44' W 5.00 " 330 " "

S 63° W 5.70 " 376 " "

N 1° 24' E 5.00 " 330 " to place

of beginning. Contains $2\frac{1}{2}$ acres

The point of beginning is

114' 3" N $1\frac{1}{2}$ ° E of the Iron monument

on the line dividing Section 16 - as est-

ablished in Survey No. 14 according to No. 8

June 24th 1879. Record July 1st 1879

John Mansfield

County Surveyor

Township 36 South, Range 111 West

Bearings

Survey No. 18 (Miller & Sanders)
To divide Section 21 of 1/4 Sec. 21

Begin at the 1/4 S. Corner of E. bay of Section 21 - Hence

- 11.50 chs. To foot of hill E. bay bottom
- 18.00 " Cross the Corner of Sanders' fence
- 20.00 " Set a temporary line stake
- 26.00 " Sanders' house S 36° W Road Myrtle
- 27.00 " Center Clearing Miller's house N 20° E 150.00 chs dist
- 30.00 " Wagon road N 70° W 98.70 E
- 40.00 " at 1/4 Sec. Cor. Center of Section
- Hence - Myrtle 40° and S 80° W 37 chs
- 56.50 " Pine Knob 8° N 85° W 70 "
- 63.00 " Gen. Merriam's fence 40 chs N. of line. few timber
- 68.25 " Road N 20° E 4820° W
- 68.50 " Ground Bear. Length of Rogue Run.
- 71.64 " Edge of Slough
- 74.24 " Opposite side of Slough
- 78.74 " 1/4 N. bay of Sec. 21 Set new 1/4 S. Cor.
- Hence - Williams 13° and N 30° W 2 chs

18 " S 60° E 34 "
June 25th 1879 - Record July 1st 1879
John Fitzhugh
County Surveyor

Township 36 South Range 14 West

Runway

Survey No. 19 - (MacMcPherson)

S^{1/2} of Sec. 32 - Unsurveyed lands.

Begin at the N. Sec. corner on the E. bay
of Sec. 31 (marked by a corner of stone)
Three feet ^{on N. bay of McManis Run}

East

16.50 Chs. Rocky Spur Slopes South

"

20.00 " Set a 1/4th S. Cor. on summit of Spur Vanda 2500 ft.

"

40.00 " Set a 1/4th S. Cor. center of Section. Temporary
stone S. on Standard

South

2.00 Chs. Gulch S 0° 00'

"

7.50 " Sand S 20° E

"

40.00 " Through brush down a gulch to
a point. Found no corner or
lumber trees, set a temporary stake

"

New South from N. S. Cor. E. bay of Sec. 31

South

23.00 Chs. Enter brushy timber N 75° E. Set a

point 50 Chs W of McManis meadow

McManis house bears E. about 500 Chs

"

23.00 Chs. Summit of a timbered spur slope S. E.

"

29.00 " As a point. Re-establish the cor. of

Sec. 31 from N. S. bay of sp. in summer

N 80° W 22 Chs from a maple 25" dia. around

the Surveyor's Mark by Easting in, and the

other trees agree with W. Tulee notes

"

29.07 Chs. Enter S. E. Cor. on the E. of Sec. 32

"

From corner back to 1/4 S. Cor. S. of Sec. 32

"

From E. on S. bay of Sec. 32

East

7.60 Chs. Steans S. E. side course South

"

14.00 " Enter Prairie N 75° E

"

20.00 " Set a 1/4th Corner

"

22.00 " Wood on summit of Prairie ridge N 75°

"

29.00 " Timber N 75° E to corner

Township 35 South, Range 14 West

Shanty
Coat

No. 19
(continued)

37.50 chs. Enters Salina Perry bottom
40.00 " Intersect the line from the north.
at a point 20 chs N. of a stream 10 chs
wide, running SW

Set a 1/4 S. Cor.

Witness - Max H. and S. H. & E. 18 chs.
July 9, 1879 - Recorded July 15th 1879
J. H. [unclear]
County Surveyor

Township 35 South, Range 14 West

Debit

Survey No. 20. F. O. Van der Graaf
 Claim - 1/4 of NW 1/4 of Sec. 32 - N.E. 1/4 of NW 1/4 of Sec. 32
 & SW 1/4 of NW 1/4 of Sec. 29

Begin at the N.E. Corner of Sec. 31 & the
 NW Corner of Sec. 32 as a form of iron staked

East	2.00	Chs	Enter Paris & Cross a fence
"	2.50	"	Summit of ridge NW
"	20.00	"	Temporary 1/4th corner. Cross S60°E 200 chs
"	25.00	"	Enter timber at S.E. NW
"	28.00	"	Wagon road N.E. SW
"	35.00	"	Foot of hill. Enter a Flat.
"	40.00	"	Set a temporary stake.

From the center 1/4th Cor. 20 chs. E. of N.S. Cor. on
 E. bay of Sec. 31

North

"	3.00	Chs	Mag. Iron. unmarked 300
"	5.00	"	" " toward 300
"	10.00	"	Rocky Spruce Slopes S.E.
"	15.00	"	Thick Firwood Gulch nearly SW
"	20.00	"	Set 1/4th Cor post from which a Pine 20" dia is S 75° E 26 chs.

Fence trace a line East without
 opening to the corner of Frank's signed fence
 July 10, 1879. Record July 15th 1879

J. W. R. R. R. R. R.
 County Surveyor

Township 36 South, Range 117 1/2 West

Blamp

Survey No. 21. Eason, Sutton & Co. et al.

To re-establish the line between sections 21 & 26, 21 & 27, 26 & 27, 27 & 28.

John W. Bonlaw supposed to be a witness to the measure of corner of fract. Sec. 21 & 26, No. 100 Cass 110, Ch. which, according to U.S. Files No. 10 should be the distance to the Township line. Show by cutting away the growth of timber and finding the marks the U.S. Surveyors. The pins ascertained as a witness bar was identified. Traces run West 176 1/2' and find the same N.P.S. line given by the Bonlaw. See a witness stake marked Ch. on the opp line 280' E.S. of the point where the meadow corner was originally located. No. 112, the witness bar and re-mark the Bonlaw.

Traces on corner of 21 & 26 120' E.S. West from the witness stake at a point 163' E.S. of meadow foot.

Traces on the opp line 280' E.S. of the point where the meadow corner was originally located. No. 112, the witness bar and re-mark the Bonlaw.

2.30	Chs. Old ditch runs SW
2.70	" Sutton's fence N.E. & S.W.
3.06	" " " 11708
4.00	" Ditch (course S.E.)
5.00	" Gulch " SW
6.00	" Ditch " West
9.50	" Set a temporary post
10.50	" Enter Prairie N.E. & S.W.
11.50	" Summit of open slopes SW
13.00	" Enter timber E & W
16.50	" Gulch and stream course West
19.50	" Enter Prairie E & W
20.00	" Prairie open slopes West, center of house 4 chs West
27.15	" 30' chs S. of meadow cor. Set post. 11708
	Traces. Continue South
5.00	Chs. Rocky open slopes West
111.00	" Enter timber E & W
	(see next page)

Township 36 South, Ranges 14 & 15 West

Bearings

Survey No. 21. Return Dec. 31 & 26. Contained
 17.00 Chs from J. S. Co. Stream Runs West
 25.00 " Summit of timbered ridge E & W
 35.00 " Swampy bottom N & S
 40.00 " To a point in James Gibbons' Enclosure

July 16th 1877

By the assistance of Henry Colvin made with the 3 stumps of some of the original withered trees were found - We established the NW corner of 1876's 26 1/4 1/4 by running 800 1/2 ft from a The stump found the remains of the other withered trees agreeing with the field notes of the U.S. survey excepting the corner which is entirely destroyed

Drives an iron stake 1/2" thick 2 1/2' wide and 21' long for township's corner. from a stake

at Yellow Rock dump 24° 00' base 109° 0' 1/2' like

" White " 16 " " 110° 11 "

NW corner of Gibbons' home. " 88° 0' E 50 "

Cherry tree 2° 00' " 56° 11' 7 "

The 1/4 Sec corner must be located 17 lbs. S and 117' W

South of the temporary post.

July 17th 1877. Record - August 7th 1877

John H. Hough
 County Surveyor

Township 36 South, Range 15 West

Survey No. 23 (A. J. Evans)
Survey of lot No. 3 in Sec. 36

Re-establish the 1/4 Sec. Cor of the E. bay of Sec 36
40 Chs. S. & 19 Chs. E of the temporary post
Witness - Five 12" dia. N 31° E 62.2 Chs

" 30. " N 88° W 139 "

Extrem N.W. of a Barlow bar 517° W 26 Chs.

Run a Bar of about 26" long for Corner Monument.

Fences part on S & E. Lot No 3

4.50 Chs Eastern Fence E & SW

7.00 " Gulch Course NW

8.50 " " " North

11.00 " Table land in timber

13.00 " Picket-Fence & Road N & S

19.60 " Eastern Gantlett's Meadow

20.00 " S.W. Cor of lot No. 3. Set a Stake marked C.S.

Witness - A Spruce 26" dia. S 77° E 119 Chs

" Fences North

7.00 Chs Gantlett's Fence

5.00 " Low Flat (Barack)

26.00 " Point near highwater mark. Set a Stake marked

C.O. And take azimuth bearings, and;

1. End of 1 1/2 week at Sea N 60° 33' W. Then measure angles
from Stake to the right - West extremity of Mc Cormick's corner

29° 44' - West Extremity of Fitchery 119° 25' S. Ex 9 of

Witness 124° 46' N. End of Terminal of Jackson house

139'. This witness post stands 116 Chs S. of the NW Cor
of lot No. 3 on the meadow line which is now in the river.

July 17th 1879 Recorder August 1st 1879

J. H. F. Houghton
County Surveyor

Township 36 South, Range 14 West

Beavins
Surrey No. 23. (Walter Sutton)
By deed from Robert Walker to Walter Sutton

Establish the SW corner of lot No. 1 in Section 31
from which

A Yellow 10" dia. bar N 57 1/2° W 38 Chs
" Cherry tree 8" " N 57 1/2° E 38 "

1/4 Acre

East 12.73 chains to point (See N 75° W 12 Chs)

N 50° W 10.00 " "

S 87° 0' W 3.28 " "

S. 69° 1/2° W 2.10 " "

South 5.50 " "

At each corner a post marked C.S. W. Sutton -

July 18th 1877 - recorded - July 5th 1877


John Fitzhugh
County Surveyor

Surrey No. 24 is a County Road in Cherokee Co.

on Record in the Clerk's Office

Furnished July 25th 1877

John Fitzhugh
County Surveyor

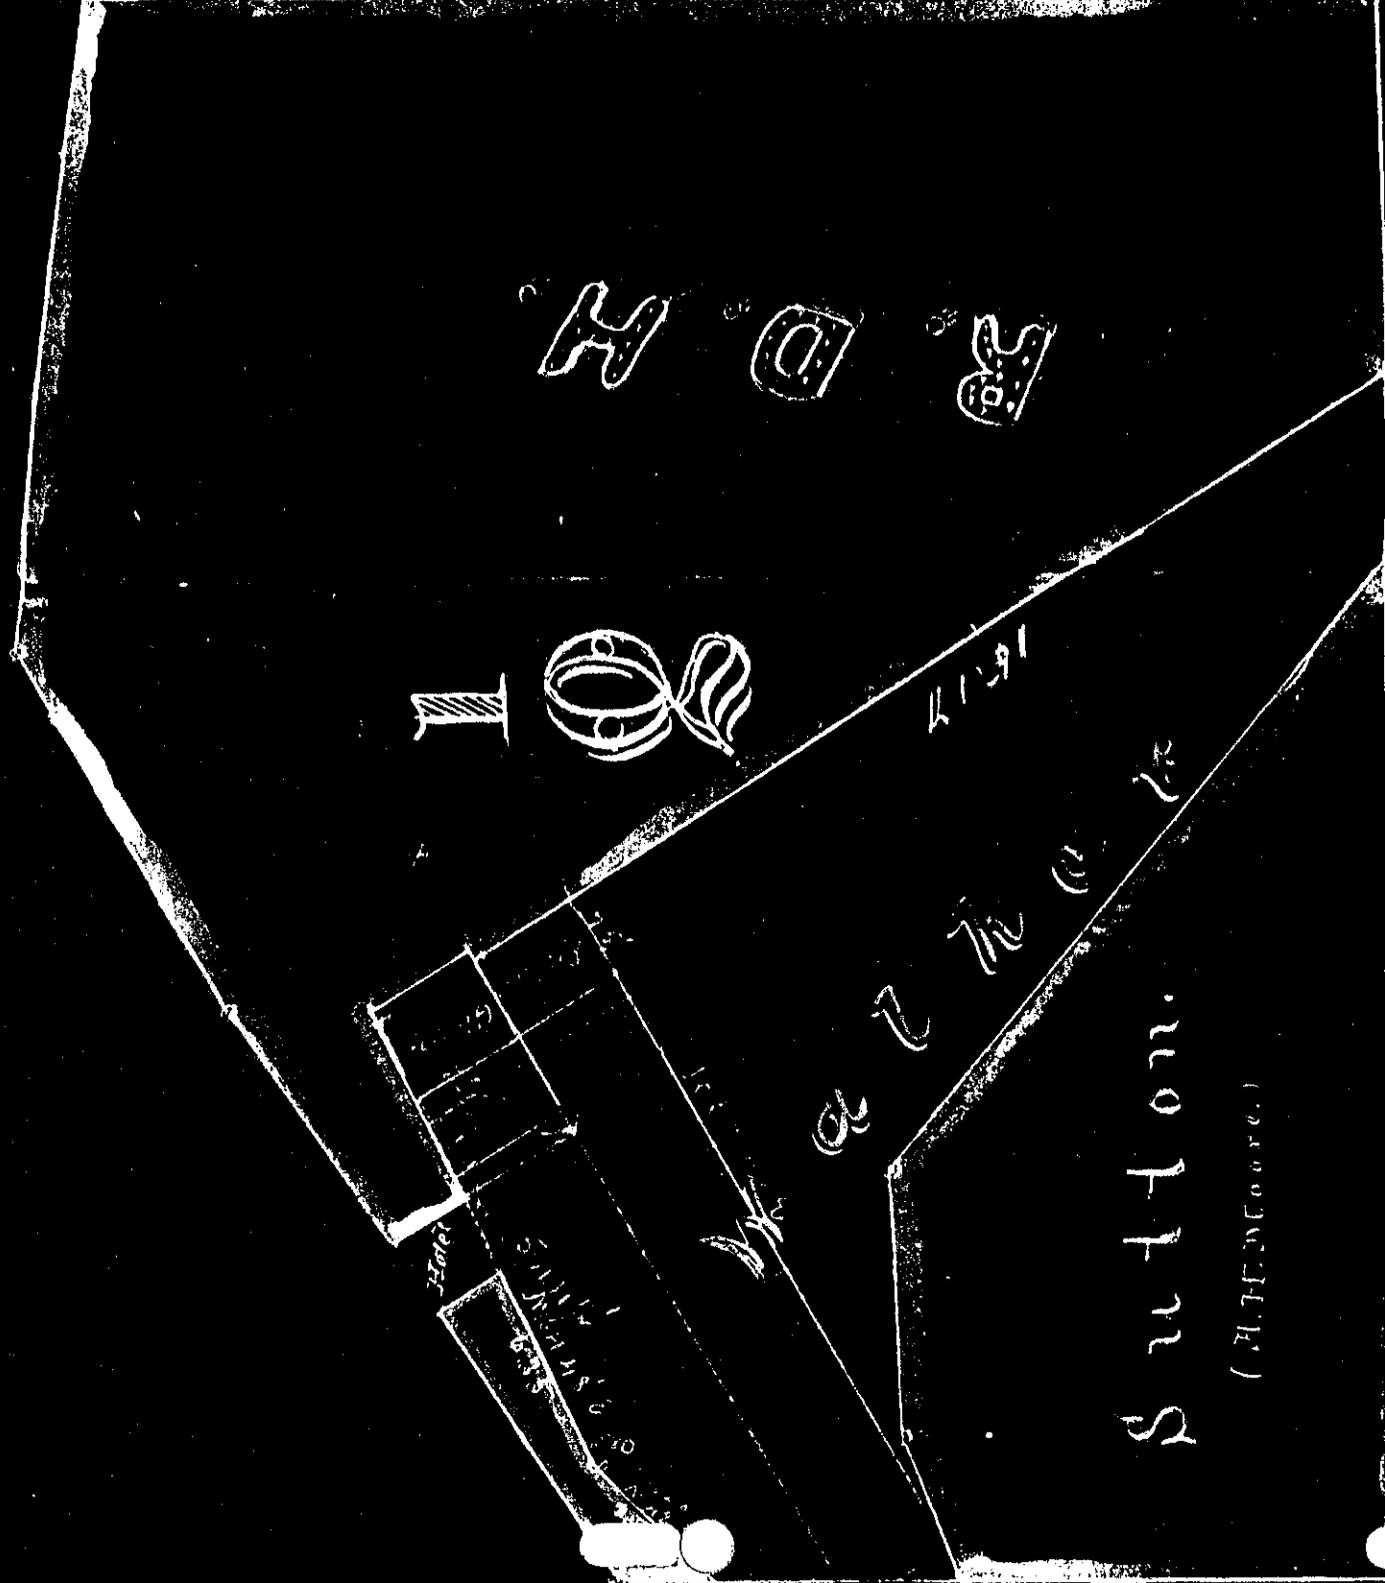

R D H



a 2 3

Sutton
(M.F. Moore)

5.02

12.73

Since

1/20

Township 36 S. Range 15 West. Ellensburg

Survey No. 25 (Delos Woodruff-Judge)
Lat for a Court house 67th front.

(Eason)

Begin at a Stake at the corner of
Eason's fence - 7 fences
S 41° W 64 ft 6 ins
S 49° E 155 "
N 41° E 64 " 6 ins
N 49° W 155 " To the place of beginning
August 1st 1879 - Received Aug. 8, 1879
John Highough
County Surveyor

Survey No. 26. (Walker and Willard)
Lat in Ellensburg.

Begin at a point S 81° 15' E 100 feet from
a Pine in front of H. B. Gibbons house
S 81° 15' E 100 feet " "
S 58° 45' W 75 " " "
N 31° 15' W 100 " " "
N 58° 45' E 75 " " " To place of beginning
Sept 6th 1879. Received Sept 8th 1879
John Highough
County Surveyor

Township 36 South, Range 15 W

Survey No. 27 (Capt H. Strabard)

H. Strabard's Deed to Jerry Huntley

Acres as follows:

Begin at a point 12.50 ch South of
the N.E. corner of lot No 44 & 1/4 Sec. 36 of lot
No. 8 in Sec. 36. T. 36 S. R. 15 W.

- 2.51 ch
- N 22° 30' W 8.18 "
- North 8.75 "
- S 75° E 8.20 " to place of beginning

Survey

to the N.E. cor. of lot No. 44 Sec 36

- 60 ch Cross a plank fence
- 2.70 ch " " Nail fence
- 12.00 " " " " " "
- 12.00 " " " " " "

France ...

2.51 ch. to J. Huntley's N.E. cor. 17 ch. 1/4 sec

The stake is 86 ch. N.W. of a former survey
Thomas South

- 5.00 ch making 20 ch. from N.E. cor. of lot No. 44
- Set a stake marked 10, 4 C.S.

France 1.01

12.70 ch - set a stake in the meadow corner

of the Pacific Ocean at N.W. corner of lot No. 44

August 7th 1877. of Leonard & J. Huntley
County Surveyor

Township 36 South Range 14 West.

Survey No. 28 - (Walker and Grimes)

Surveyed to points designated by the parties who were present.

From the Iron Monument 163 chs South of the

meander post on the Township line, Corner of Sections

31 & 36 - T36S R. 14 & 15 W - Thence North

44 1/2 chs On the Township Line, Thence

2.13 Chs do a point designated "

N 64° 48' E 6.25 Chs do the line in front of M. B. Wilson's place

S 31° 15' E 15.17 " (By Calculation) S. bay of Lot No. 1

East 3.02 " to the corner of Lot 1 & 2

From the foregoing survey the following description is

advanced - Begin at the meander post, Co of Secs. 31 & 36 N. bay

of T36S R. 14 W Thence

South 1.18 chains "

N 42° 32' E 2.13 " "

N 64° 48' E 6.25 " "

S 31° 15' E 15.17 " " Bay of lot "

East 5.02 " do the corner of lot 1 & 2 Thence

North

do the meander line of above road, thence

Along the said meander line to place beginning

August 10th 1879 Records August 10th 1879

John Fitzhugh

County Surveyor


Township 36. South, Range 15 West

Survey No. 29 (De la Woodruff)
 A survey of a lot for a Court house

Began at the W. corner of Lot 17. S. of
 W. 1/2 Survey in Allenburg, which is
 located at the NW. corner of Kings & Coon.
 and is S 46° 30' 14" 223 feet from an Iron
 Monument in the Township line 107 1/2 feet
 South of the Meander corner between Sections
 31 & 36 —

Thence run by angles (and bear left)
 S 46° 30' 14" 80 feet Thence
 S 49° 30' E 264 " To Township line "
 North 109 " (in a curve "
 S 48° 30' W 184 " to place of beginning "
 Sept. 12, 1879. Resolved Sept 14, 1879
 John Stoughton
 County Surveyor





Township 36 South, Range 15 West

Survey No. 30. (Grant's property)
According to Records of Deeds

Begin at the N.W. corner of lot No
2 of Pratt's Survey in Ellensburg (See Survey No. 27)

Platted

S 46° 30' E 2.89 chs Franco

South 4.79 "

N 46° 30' W 6.19 "

N 48° 30' E 3.48 To place of beginning
Surveyed the first according to the
above description.

Sept 2 1879. Recorded Sept. 10th 1879

John D. Hughes
County Surveyor

Township 26 South, Range 15 West

Survey No. 35. (Riley & Stewart)
Data from Geo. W. Hamner to Riley & Stewart
from the Records. Begins at the NW corner of Lot 24, S.

Step 1 2, 59 etc

North 2, 67 "

N46°00'11"

at low water mark on Niagara river

Thence Nlay said low water

mark to the true dividing lot 27 & 28: Thence

on said line to the place of beginning.

Surveyed according to the above description

Sept 2, 1877. Record, Sept 10th 1877

John S. Stewart

County Surveyor

from the Records

Township 36 South, Range 14 W

Survey No. 32 (R. D. Hume)

Means of South Shore of Rogue River from the mill in Ellensburg to determine the amount of land washed away.

Begin at a point 118 Ws. South of the meadow post, Corner of Sections 31 & 36 in Ellensburg

Thence as follows

N 42° 32' E	2.13 chs.	} By Calcuttine, Company then notes with the notes of the U.S. Survey of 1810 are found to have washed away since the U.S. Survey was made Surveyed Oct. 30th 1879	
N 64° 48' E	6.25 "		Record Nov. 20 1879 John Fitzhugh County Surveyor
N 48° 54' E	8.04 "		
S 69° 26' E	8.62 "		
N 80° E	8.59 "		
N 44° E	8.59 "		
N 57° E	5.20 "		
N 68° E	5.84 "		
N 46° E	7.44 "		
N 59° E	6.23 "		
N 51° E	8.59 "		
N 58° E	4.96 "		
N 61° E	3.95 "		
S 85° E	5.92 "		
East	11.23 "		
N 70° E	12.45 "		
N 77° E	4.03 "		
N 70° E	3.95 "		
N 56° E	11.61 "		
N 68° E	2.14 "		
N 54° E	7.99 "		
N 64° E	7.76 "		
N 82° E	12.18 "		
N 95° E	5.00 "		

Mount of Crude at Chicago

By Calcuttine, Company then notes with the notes of the U.S. Survey of 1810 are found to have washed away since the U.S. Survey was made Surveyed Oct. 30th 1879

Record Nov. 20 1879
John Fitzhugh
County Surveyor

Township 31 South Range 15 West

Bearings	Acres	Notes
South	No. 33	1/2 of N.E. 1/4 of Sec. 3 (South section of 27 1/2 N. 1/4. line)
S 3° 15' E	3.00	From top of 2nd and 3rd, down to center of cabbage swamp
"	6.50	Leans Swamps into Spruce timber
"	14.00	Streams 6 Mts. back Course West
"	16.13	Set 2 1/2 ft. corner from which Alder 8" dia bears N. 60° 20' W
"	"	" 5" " " N 10 1/2° W 43 "
West		Placed West on S. City of 80 acre lot
"	2.30	Chs. Leans timber N 70° W x S 70° E
"	11.50	Trail N x S
"	12.00	Log 8 dm N 24° E 3 chs
"	14.00	Enter Brushy Bottom
"	26.00	Set temporary post - marked J. C. Witness Alder 12" S 64° W 22 Chs

May 3 1879
 Recorded Nov. 2, 1879
 John Fitzhugh
 County Surveyor

Township 236 South, Range 14 West

Bearings No. 37) Thos. J. Culson

Re-established the cor. to Secs 5, 6, 7 & 8
from the witness trees

Willow S 12° E 381 Chs

Grindstone S 44° W 385 "

Thence

S 89° 44' W 23.00 Chs. Prairie - Gulch Memo N 30° E

40.00 " Set 1/4 Sec. Cor.

48.90 " Center timber & Elm

51.35 " Summit of divide of old Old trail to Fort Oxford

61.50 " Gulch runs NW. Dunes under marks

80.00 " So Corner of Sec. 6, 7, 14 & 12

South from the N.W. cor. of the Township (equal halves

18.60 Chs To a point 29 Chs a Stake set to divide lots 1 & 2 into

22.50 " Gulch runs West

37.50 " Creek Course West

40.48 " To a point 17 Chs E. of 1/4 Sec. Cor.

Correct the line back & take new bearings from 1/4 S. Cor.

South From 1/4 S. Cor. N. bay. of Sec 6

26.00 Chs Gulch and stream runs West

36.50 " " " "

79.81 " To a point 79 Chs. E of the Cor. of 7 & 19

Correct the line back to 1/4 S. cor

Oct. Nov. 3rd 1879. Record Dec. 1st 1879

John D. H. H. H.

County Surveyor

Township 35 South, Range 14 West

No 35, Late Moore.

Made to determine the amount of
 overflowed land on the NW^{1/4} of Sec 14
 of Twp. 35

Begin at the SW corner of said 40 acre lot
 thence around the overflow portion
 as shown by the drifts

East 3.00 chains

S 21° E 4.50 "

S 65° E 2.60 "

S 10° E 4.00 "

S 57° E 2.80 "

S 30° W 1.50 "

S 60° W 3.30 "

S 70° W 6.60 "

North

16.00 "

To point of beginning

Making 12,100 acres of land subject to overflow
 of Sept. 20th 1879

Recorded Nov 22nd 1879

John Fitzhugh


County Surveyor

Sec 8
B. B. I. & M.



Sec 8

Lot 5



Township 35 South, Range 14 & 15 West.

No. 36. Lyman Woodruff
 on E. line of Sec. 26 NE 1/4 of Sec. 27
 3.00 Chs. Crute runs SW
 10.25 " Wagon road NE of SW
 20.00 " Temp. 1/4 ^{1/4} Cor.
 28.70 " 500' E of N 100' W
 29.50 " Head of a ravine runs N.
 31.50 " Leam Ravine; runs N 22° W to B creek
 34.00 " Ditch 2 Chs. E of line N 45° nearly
 40.00 " See a Temp. 1/4 S. Cor.
 42.00 " Ravine runs N 60° W.
 51.27 " Shore of Pacific Ocean See Temp. Ravine Cor.
 (Rocky Point 5 Chs. S. of Mean. Cor.
 Offset 2.00 W. Nest from Mean. Cor. 7. Hence run
 by Mean. Not. of U.S. Survey
 N 25° E 11.50 cross a wetty spur
 " 23.00 To a point W. of Woodruff's Cabin
 " 30.00 To Cor. (Temp.) of Sec. 31
 By this Survey the line of the Shore means line
 50 lbs East of Lyman Woodruff's Cabin
 Reestablish the Corner of Sec. 30 & 31 by running
 N 62° W 987 lbs from a pine 12" in dia. from which
 a boulder bears ~~SW~~ N 52° W 120 lbs
 From the corner thus reestablished the Cabin is
 East of a line bearing S 25° W.

~~Corner of Section 30 & 31~~ and ~~to the East of line~~
 From a point 698 lbs South and 167 lbs East
 of the N.W. Corner of Sec. 31 -
 Mouth of 1st ditch bears N 69° E
 Head " 1st " " S 80° E
 Mouth " 2^d " " S 14° W Cor.
 Head of 2^d " " S 80° E Ravine

See next page

Township 36-South, Range 14 & 15-West

No. 36 - Continued Lyman Workluff
 Mouth of 3^d ditch bears S 31° E
 Head " 3 " S 31° W in a dike
 Flume runs a bore S 13° W 500 yds to head of Cove
 At 210 yds Ditch 100 yds long. Cross at center runs N 30° W
 From S. End of Band Crute from S.E.
 Mouth of 1st & 2^d ditch at Road N 40° E
 Mouth " 1st & 2^d " N 23° E
 Mouth " 2 " " N 20° E

~~Measure of Sec. 31 from 200 yds west of
 S 25° W 25.50. Crute. Head of Cove S 74° E 250 yds. west.~~

~~At 170 yds. little ear intersect the Ranch
 Measure of Section 31 from a point 200 yds
 West of N.W. Corner.~~

S 25° W 1.00 chs. Little Cove 40 yds E (w. End of same N 57° E)
 " 4.00 " Intersect the head end of R. N 28° W
 " 5.50 " Crute, head of Cove S 24° E 250 yds
 " 7.50 " Cove Mouth of Crute S 20° E. E. of Span S 9° W
 " " " Cabin point N 37° E. E. End of Bay N 9° E
 " " " West end of same Bay N 19° W
 " " " Center of rock north 70 yds
 " 12.50 " Mouth of Crute bears East
 " " " Fluff Bank S 60° E 100 yds
 " " " Spur point N 38° E

On the meanders of Sec. 36 from the 17th N.W.
 Filed notes to the Township Line

Nov. 21st 1879

John Fitzhugh
 County Surveyor

Township 36 South Range 14 West.

Survey No. 37 J. M. Canfield

N¹/₂ of S¹/₄ of T² S² 2, 3 & 4 in Section 10

From a point on N. bank of Rogue River from which the measure post on the S. bk. between Sections 15 & 16 bears S 6 3/4 W. Run a line at Rt. Angl. S 83 1/2 E 626 Mts. to a point from which the measure post on the opposite shore bears S 14 3/8 E making the acute angle at Station 68° 5' Angle at

flag 21° 55'

(Nat. Cal. of 21° 55') 2,448 x 626 (The base)

= 1552 Chs. the Distance over

act of 1552 = 1552 x 1.82 =

" " 626 " 74 " 625-

France

N 83° E 48,14 Chs. Lat 699 . 8 48,77

Set a flag at last Station

From measure post South bank of river between

Secs. 10 & 11

538 Chs to a point on gravel bar

1685 " Lat 12.12 - exp 11.70 Set a flag -

From cross river from a point on N. of last

Station on South Side

885 Chs - do flag. Lat 16.26 exp. 374 Making

Measure from E & W measure 77.84 Chs across Section

Therefore measure 1574 Mts East from the flag

= 56,84 and Set a Stake on the line arising bet 2 & 1 in Sec. 8

Decr. 17th 1879

John Fitzhugh
County Surveyor

West

S 14 3/8 E

N 77° W

Township 36 South, Range 14 West.

No. 38 Wm. C. Miller & others

Reestablish the $\frac{1}{4}$ Sec. corner on the S. bay of Sec. 8 from lots of U.S. Survey

James West ascending a hill

West
 20.00 chs. Set a temporary $\frac{1}{4}$ Sec. cor.
 25.00 " Summit of Divide NW $\frac{1}{4}$ & E
 39.411 " Do a point from which the corner of
 Sections 7, 8, 17 & 18 bears about S 82 W
 Correct the line by moving the $\frac{1}{4}$ Sec. corner
 29 chs E 741 Sec. S.

Fence south on West bay of Wm. C. Miller's land

South
 2.00 chs. Summit of open slopes East
 6.50 " Gulch and stream runs East
 10.00 " Summit of open slopes East Oak ^{marked by 2 $\frac{1}{2}$ timber}
 14.00 " Gulch runs East
 17.50 " Empty Cistern Jan'y 19th 1892
 18.00 " Magers Road N 70° E 78.70 9 W
 32.00 " Gulch runs East
 40.00 " Set a temporary $\frac{1}{4}$ Sec. corner

Reestablish the corner of Secs. 17, 18, 19 & 20 in

S. B. Gardner's Corral by notes of W. J. Murray - fence

North

20 chs. Fence E & W
 20.00 chs. Summit of Prairie ridge
 26.00 " Stream course S E
 40.00 " Set temp'ry $\frac{1}{4}$ Sec. cor.
 71.00 " Road S. 23° 00' E N 25° 00' W Enter timber
 80.15 " Do a point 3 chs E. of cor. of 7, 8, 17 & 18
 Evg. Reestablish the $\frac{1}{4}$ Sec. corner in line at
 average distance, toward - 7 $\frac{1}{2}$ chs
 North of $\frac{1}{4}$ Sec. N of temporary post

Township 36 South Range 14 West

No. 88 (Continued), Geo. C. Miller, et al.
 East on N. bay of Peter Glynn's land from
 the $\frac{1}{4}$ S. cor. between Secs. 17 & 18

East 14.00 chs. Along fence to base, Summit of divide
 " 18.00 " Enter timber
 " 19.69 " To a point 94 lks S. of temporary $\frac{1}{4}$ S. cor.,
 Began to ascend the hill
 " 22.69 " On established Miller's St. Cor. from which
 White Spruce 20" dia. is 510 W 18 lks

Distance on same course

East 4.00 chs. Began to ascend hill to E. of M
 " 20.00 chs. Down hill to Peter Glynn's N.E. corner
 Cor. tree is an oak 18" diam.

Jan. 24th 1880

East from Peter Glynn's N.E. corner

East 5.00 chs. Front of hill N.W. Enter bottom
 " 7.00 " 1 bank of slough
 " 9.46 " Opposite bank
 " 17.00 " 1 bank of a slough
 " 18.74 " Opposite side
 " 20.00 " Temporary $\frac{1}{4}$ S. cor. Geo. Miller's St. Cor.
 " 24.00 " Enter Prairie bottom N.W.
 " 39.16 " To a point 64 lks N. of. Back and corner
 George Miller's St. Cor.

July 26 1880

Point from the $\frac{1}{4}$ S. cor. 20 chs. E. of the
 corner of T. S. 17 & 18

Point

35.00 chs. deep gulch. Stream runs East

40.00 Set a temporary post for closing future survey

Township 36 South, Range 14 West

No. 39 Mansfield and Kent

Begin at a point 20 chs. North of
the 1/4 Sec. cor. between Sections 15 & 16 - Thence West

West 20.00 chs. A 15 chs. Enter bottom of field
Thence North South

South
S 26° E 8.00 ch. To meander line - Thence
S 19° 30' W 13.50 " " a point
S 19° 30' W 18.32 " " to a point - from which is drawn

the following description -

Begin at the 1/4 Sec. cor. on the
line between Sections 15 & 16 Thence
North 33.92 chs

- S 60° W 6.00 "
- S 67° W 2.50 "
- S 61 1/2° W 5.00 "
- S 52° W 6.18 "
- S 57 1/2° W 5.00 "
- S 26° E 13.50 "
- S 17° 30' W 18.32 "

East 20.00 " To place of beginning
closed 11th 1866

John Fitzhugh
County Surveyor

Corrected description making close line straight

Begin at 1/4 Sec. cor. as above, Thence

West 33.92 chs To river bank

S 53 1/2° W 20.85 "

S 26° E 13.50 "

S 15 1/2° W 19.14 "

East 20.00 " To place of beginning

John Fitzhugh
County Surveyor

Dist. 56 1/2 acres

Township 35 South, Range 14 West.

No. 401 Estate of M. Gore
Land Bonded by Judge Woodruff
Begin at the N.W. corner of the S.W. 1/4 of
the N.E. 1/4 of Sec. 8 Thence

East 5.02 Chs.

South 1.70 "

S 76° E 4.00 "

South 17.33 "

West 8.90 "


North 20.00 " To beginning point

Contains 16.95¹⁰⁰ acres

Dec 26th 1880

John Fitzhugh
County Surveyor

Township 35 South, Range 14 West.

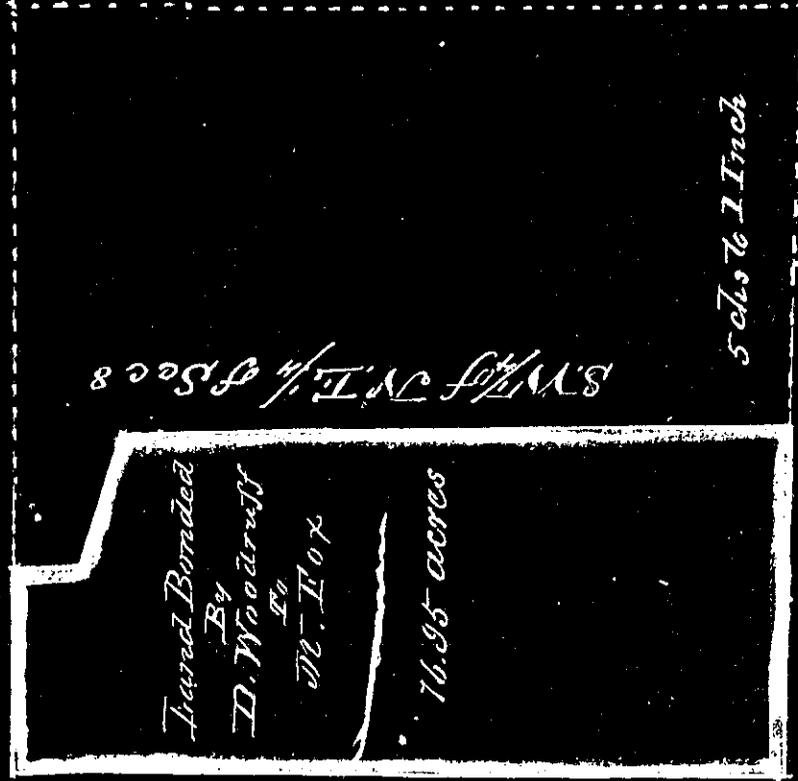





Township 36 South, Range 14 West -

No 41 - Plummer Emery

To find whether the anchorage of his
fishing is within the U.S. Survey lines.

Begin at the SW corner of Lot No. 1
in Sec. 10. about 75 lks from the water and from
which point the mean line runs up the river
N 61¹/₂° E 5 and the point of rocks hold the Arts bears
N 70° E 300 lks. dist. Thence by Notes of W. Survey
S 61¹/₂° W 3.36 Chs. to a spot. 75 lks from river
S 59¹/₂° W 1.50 " " " 50 " "
S 62¹/₂° W 1.12 " " " 80 " "
S 61¹/₂° W 9.111 " " " 250 " "
S 57¹/₂° W 17.119 " " " 50 " "

From the last point the buoy to which Arts
are anchored bears S 33° E 257 lks dist = 150 lks
from shore.

May 28th 1860

John Fitzhugh
County Surveyor

Traverse 1/2 3/4 South, Ranged 1/4 West

No. 42 - Jesse Camp -

Begin at 1/4 Sec. Cor. between sections
19 & 20. Verify the corner by U.S. Notes, Cont.
Spruce 30" dia. N 87° 0' E 24. the
Pin 10" " S 25 3/4° E 29 "

4.00 chs. Foot of hill, Enter bottom. Road 1/4 Sec. N.W.
7.00 " Center Clearing
10.00 " SW cor of clearing house
12.00 " Enter timber
16.00 " Crk, runs off into lower section
20.00 " Temporary 1/4th corner
Jesse Camps 1/4 corner
25.00 " Foot of hill N.E. of hill
27.50 " Summit of hill contained
53.00 " " " Divide S.E. Hill
70.00 " Begin to ascend
75.00 " Trail N.E. of Hill
80.60 " intersect E. bay of Sec. 20 0.00
Eto S. of 1/4 Sec corner

Same course N 87° 0' 0" E -
at a stake for center of section 20.
50 chs. E. of 160 chs N. of temporary post
Spruce - 110 pole 6" dia S 25° 0' W 170 chs -
New Jesse Camps N.O. cor. 10.160 E 18. chs. N.
Pin 10" " Corner on a line myrtle log
80" dia -
Jesse Camps house is 18' South of
the line -
July 8th 1880

John F. Hughes
County Surveyor

Dawson's 16 South, Naysa ¹⁵ West

No. 118 - Court House

The N.W. corner of the lot is 1899
and the N.E. corner of the lot is 1899
as established by witness me.

From the N.W. corner of the Court
House lot the boundaries are as follows:

1899 to 1899 N. 1/2 Sec. 16, T. 10 N., R. 10 W.

1899 to 1899 N. 1/2 Sec. 16, T. 10 N., R. 10 W.

1899 to 1899 N. 1/2 Sec. 16, T. 10 N., R. 10 W.

1899 to 1899 N. 1/2 Sec. 16, T. 10 N., R. 10 W.

1899 to 1899 N. 1/2 Sec. 16, T. 10 N., R. 10 W.

1899 to 1899 N. 1/2 Sec. 16, T. 10 N., R. 10 W.

1899 to 1899 N. 1/2 Sec. 16, T. 10 N., R. 10 W.

1899 to 1899 N. 1/2 Sec. 16, T. 10 N., R. 10 W.

1899 to 1899 N. 1/2 Sec. 16, T. 10 N., R. 10 W.

1899 to 1899 N. 1/2 Sec. 16, T. 10 N., R. 10 W.

1899 to 1899 N. 1/2 Sec. 16, T. 10 N., R. 10 W.

1899 to 1899 N. 1/2 Sec. 16, T. 10 N., R. 10 W.

1899 to 1899 N. 1/2 Sec. 16, T. 10 N., R. 10 W.

1899 to 1899 N. 1/2 Sec. 16, T. 10 N., R. 10 W.

1899 to 1899 N. 1/2 Sec. 16, T. 10 N., R. 10 W.

1899 to 1899 N. 1/2 Sec. 16, T. 10 N., R. 10 W.

1899 to 1899 N. 1/2 Sec. 16, T. 10 N., R. 10 W.

1899 to 1899 N. 1/2 Sec. 16, T. 10 N., R. 10 W.

1899 to 1899 N. 1/2 Sec. 16, T. 10 N., R. 10 W.

1899 to 1899 N. 1/2 Sec. 16, T. 10 N., R. 10 W.


1899 to 1899 N. 1/2 Sec. 16, T. 10 N., R. 10 W.

1899 to 1899 N. 1/2 Sec. 16, T. 10 N., R. 10 W.

1899 to 1899 N. 1/2 Sec. 16, T. 10 N., R. 10 W.

1899 to 1899 N. 1/2 Sec. 16, T. 10 N., R. 10 W.

1899 to 1899 N. 1/2 Sec. 16, T. 10 N., R. 10 W.



Wm. J. Hughes
County Engineer

A. 23 S. W. 15 N. Port Orford, Oregon

Survey No. 1174 - Lot 11 in Bk. 1313. Map 100

Shows the Iron Monument in Exhibit
in front of Wolcott's Store -

North 420 feet. Stone

East 420 " " to N.W. Cor of lot. Stone

W. boundaries of lot

South 60 feet, Chained

East 46 " "

North 60 " "

West 46 " " Beginning corner

acquired July 1880

See also map of
of the County, Oregon

Crowship 32 South Range 15 West.

Aug 10, 1858 - N. P. Jørgensen

1000 yds S of Sec. 31

1000 yds S of Sec. 31

1000 yds S of Sec. 31 - 1000

1000 yds S of Sec. 31 - 1000

1000 yds S of Sec. 31

see next page

Township 32 South, Range 15 West

No. 46 Continued, Jurgmans' Claim

East
 5.50 East on North bay of Claim -
 5.50 chs North of a small creek runs South into
 Main Creek 50 chs S. of line
 20.00 " Point in Creek bottom. No section
 of Section Error - Mark at 8th
 8th chs. for temporary Section Error
 (Imperfect Survey) (The complete Survey)
 August 17th 1880 John Fitzhugh
 County Surveyor

Township 35 South, Range 14 West -

Survey No. 46 - James Warren

Begin at the N.W. cor. of Sec. 29
 Run in a straight line down hill
 8,000 chs. Foot of hill by the bottom
 1320 feet Set $\frac{1}{4}$ cor
 2649 " Set a temporary $\frac{1}{4}$ Sec. cor.
 Sept. 25, 1880

John Fitzhugh

North

Township 32 South, Range 15 West,

Survey No. 119 May 4 Upton

Begin at a point in the bottom
respond to be 22 chs. N. of the corner
of Sections 16, 17, 20, 21

Run a Bore 11 chs. West at 88° angle
at tree on hill 150 y' Nat. Cot. 3.70 chs.

X 11 = 117.80 to Summit of hill
22.00 Chs Set a temporary post for corner
to Secs 16, 17, 21, 22

From the corner of Secs. 20, 21, 28, 29
60.00 chs. Go to Nays corner 26 chs N.W.

from a cedar 5" dia. 6 chs East
from an Alder marked J. Noy

70.00 " 1.00 ch. Edge of line
80.00 " Back to line and set temporary
post 66 chs S. of temporary post
Above noted.

It is 10.39 chs. from foot of pine North
to that temporary post in Nays field

At the N.W. cor of the S.W. 1/4 of the S.W. 1/4
of Sec. 16 216 chs South of the temporary
post in Nays field - Thence

20.00 chs. S.W. temp. S.E. cor. of Miller's land
11.00 " Go to Nays & Miller's corner
Thence West

West 2.00 chs. To edge main course S.W.

" 14.22 " " Opposite Shore

" 13.41 " " a point

" 64 chs. " " Find nothing of cor. to

Donatene Claim No. 39 of Abandon the Survey in this section

Oct. 15th 1880

John F. Hylburgh
C. Swanson

Township 32 South Range 15 West

Survey No. 48 - To May
 From the cor. to Secs. 16, 17, 20, 21
 North 27.50 chs. to north bk. of oak rim
 " 34.00 " Foot of hill N. 70° E
 " 40.00 " Crk, Course S 70° E
 " 55.50 " Wagon road N 30° E x 80° W
 " 80.00 " To the N.W. cor. of Sec. 16
 as re-established by witness
 Oct. 18th 1880
 John Fitzhugh
 County Surveyor.

Township 32 South Range 15 West
 Survey No. 49 - - topton & McKingie.

Begin at the corner of Donation
 Claims 38739; Old cor. Standing
 East 2.50 chs. Point of hill, begin to descend
 " 4.00 " Foot of hill. Crk to W. side, Corner South

From the corner to claims 38739
 On McKingie's line, agrees with W.S. Notes

Augt. 25th 1880
 John Fitzhugh
 County Surveyor

Township 32 South, Range 16 West.

Survey No. 50. - Wm O. Sullivan

Return Dec. 1872

x x x agreeing with W.D. field notes
40.00 Chs. To 1/4 Sec. Cor.

Spurs 40" in. S 72° E 36 Chs.

" 44" " N 70° E 38 "

47.00 " Enter prairie N.E. 1/4 S. Summit of hill

49.00 " Trail N.W. 1/4 E

53.75 " Stream 3 lks. wide Course N.W.

57.41 " Pacific Shore. Meadow post

Witness } Spurs 6" in. S 77 1/2° E 618 lks.

" 4" " N 9° E 72 "

Wm. J. W. W. W. W.

Mearns of Shore of Pacific Ocean in Dec. 1872

S 39° E 88.00 Chs

S 38 1/4° E 89.85 " 1/4 Cor. of 12.13.7.18

From the intersection post between Sects 9 & 12

5.00 Chs Foot of hill enter Swamps

21.00 Sullivan's Cor (N.E. cor. of S)

Set a post in swampy prairie
Thence

5.00 Chs. Enter brush. Swampy.

20.00 " Set a post for Sullivan's S.E. cor.

Thence by bearing only
To the beach

Oct. 29th 1880

John Fitzhugh

County Surveyor

West

East

South

W

Townships 36 South Range 14 West.

Survey No. 51 - Peter Glynn.

North
Begin at the 1/4 Sec. cor. S. by. of Sec. 17
40.00 chs. to a post previously set for
center of Sec. 17 from which S 68° W 10 chs
A Sargent Oak 12" in diam S 68° W 10 chs
Nov. 16th 1880
John Pittsburgh
County Surveyor.

Townships 35 South, Range 14 West.

Survey No. 52 - Jerry Huntley & others.

Black Mining Claims.

Begin at the N.E. cor. of the claim which
is 95 feet West of the Witness Iron to the
S.W. cor. of Sec. 8 Thence

West
" " 275 feet to mound post W. cor of Sec. 8
495 " do W. cor. of Claim. Ordinary high water line.
Thence
Thence

S 17° 15' W 2930 feet To mouth of Papp's Creek
" " 4300 " To the S.W. cor. of the claim Thence

East
" " 200 feet Set a Witness Stake marked Huntley No. 20 W. of
495 " Set S.E. cor. of Claim marked N. C. Huntley
Woodruff, Sutton, Walker, Cook Thence

N 17° 15' E 50 feet Gregg's Creek 40' wide corner North
" " 4300 " do place of beginning - 46.73 acres -
January 20th 1881
John Pittsburgh
County Surveyor

Township 36 South, Range 16 West.
15

Survey No. 53. -- Hume & Co. Mining Claims

At a point which bears West 141.30 chs from the NW. cor. of lot 3, Sec. 36 Set a Stake for N.E. Cor. of Claim, marked M.C. N.Y. Co.

Thence

(Measure 7.50 chs. N 85° E and mark M.C. on a log for NW. cor. of Claim) Then back and

return from the N.E. Cor. of Claim. (50 lks East

35.00 chs To a point opposite N. End of Plank fence

64.50 " Along fence to S. End. Beecher Creek runs West.

80.00 " Small Stream, runs West

87.00 " " " " " at 85 chs Camp's 115 chs

125.00 " To S.E. cor. of Claim. Red wood post

Marked M.C. N.Y. Co.

West 7.50 chs To a point near low water ocean beach

North 125.00 chs To N.W. cor. of Claim.

January 24th 1881
John Pittsburgh
(County Surveyor)

Township 36 South, Range 16 W

15

Survey No. 54. -- Home of Co. Spt. No. 2 Sec. 36.

Begin at the corner of lots 2 & 8 in
Grantlett's meadow from which

A Spruce 20" dia. bears N 79° E 119 1/2' dist.

350 chs. To the beach

16.19 " " Sand dune near Pacific Shore

16.25 " " Set a stake marked lot 2 N. & Co.

The initial stake for the levels of

Ditch bears N 24° E 550' dist.

18.75 " " High water line of beach

Thence measured

18.00 " " To mouth of Rogue river

4.00 " " Up the river

5.00 " "

N 11° W.

18.85 " "

To line between lots 2 & 8

East

17.63 " "

To the place of beginning

(contains in lots 1 & 2

acres

January 25th 1881

John Griffith

County Surveyor

Township 36 South, Range 15 West

Survey No. 55 - -- Sibley & others
Lines on Beach - --

Begin at the North point of McCormick's rock

Thence on East bay of claims.

5.00 chs. Beach 200 lbs wide

7.00 " " 750 " "

7.50 " " " " " State 100 lbs West.

21.00 " Slat 13 chs. Stream from the East

" 14 China Cabin

Thence West across the Claims to ordinary high water line.

5.00 chs. To high water line

19.50 "

11.00 "

55.00 " Slat 30 chs. Stream runs West Rocky point

13.50 " " 50 " " "

34.00 " To N. bay of Claims

Thence

5.00 " To a Stake set for N.E. Cor. of Claims.

February 26 1881

John Fitzhugh
County Surveyor

Township 25 S. Range 12 West.

Survey No. 56. - Fred. East.

	Begin at the meander post between Secs. 2 and 3.
South	297.50 on the N.E. bk. of Rogue river Thence S 42. W
"	6.50 chs. Crk Course S.E. Begin to ascend
"	19.87 " Cor. to sections 19. 20. 29 30 on a 45° slope.

East	14.00 chs. Branch runs S.E.
"	18.50 " To Rogue river (No corner post)
	Thence meander

N 43° E	18.30 chs. Up the river, set a post for center of section 20
---------	--

July 9th 1887

South	From the 1/4 Sec. Cor. on N. bay of Sec. 20
"	1.00 chs. Down hill. Head of Canon runs S.E.
"	9.00 " Summit of Prairie Spur, Slopes S.E.
"	9.50 " Temporary peg
"	20.00 " Enter brush and timber
"	26.00 " Gulch Course S.E.
"	27.50 " Summit of ridge, begin to descend.
"	29.00 " Enter Prairie
"	X " Go N.E. bk. of Rogue river

North	From the 1/4 Sec. Cor. on N. bay. of Sec. 20
West	20.00 chs. Set 1/4 Cor. in Sec. 17
	Thence West

South	20.00 chs. Set 1/4 Cor. in Sec 17
"	13.00 chs. Enter Ran Dickinson's Orchard
"	15.50 " Leave "
"	35.00 " Gulch
"	40.00 " Enter timber

"	76 " To bank of Rogue river
	July 14th 1887
	John W. East
	James Searcy

Township 35 South, Range 13 West.

Survey No. 58. — Billy Pugh

From the manure post on left side of Pogue
near between Secs. 33 & 34, measuring

N 6 1/2 E	6.90 Chs
N 57° E	9.00 "
N 49° E	15.00 "
N 57° E	4.50 "
N 75° E	4.50 "
S 88° E	7.00 "
S 62° E	5.00 "

From same manure post to find the Section line

S 69° E	6.90 Chs
S 49° E	6.00 "
South	4.30 "

Shaded

To bank of Kesatony Creek

East	from the S.W. cor. of Sec. 34
"	11.00 Chs To foot of hill
"	15.00 " Kesatony, Course North
"	19.50 " Enter maple & maple bottom
"	35.00 " Foot of hill N 45° E S 15° W

July 22, 1881

John D. Hight

County Surveyor

Rancho 40 South Range 13 West.

Survey No. 59 - See Johns & J. A. Stett

In Section 34 T35. Begin at the

1/4 S. cor. between Secs. 34 & 35 -

(New witness for Myrtle 10" di. S 61 1/4 E 36 lks.

6.50 chs. S. Pt. bk. of Chiteo river

Set a flag and cross over -

Rt. angle bears 100 lks

Angle at flag 110 52'

Nat. Cot. 4.76 + wire 640 = 11.26

11.26 chs to opposite shore

19.50 " " a found Set a witness stake to 1/4 cor.

Offset 150 lks. North

20.00 " Set a Stake witness to 1/4 cor.

40.00 " Offset 150 lks. South, and set a

Witness 1/4 Sec. cor. Oct. 10, 1881

42.00 " See Johns' house bears South 100 lks.

44.00 " Begin to ascend

47.00 " Enter brush and timber

70.00 " Gulch, Course North

80.46 " Intersect the line between Secs 35 & 36

543 lks South of 1/4 Sec. corner

From the 1/4 Sec. cor. on the S. bay, of Sec. 35

17.00 chs. Enter timber and begin to descend (to S. Cross Thompson)

19.00 " Gulch runs West.

39.88 " Intersect E & W line dividing Secs. (random)

42.58 " " The true division line of Sec 35

52.50 " Left bank of Chiteo

67.78 " Old bar on opposite shore

69.50 " Pt. bk. of S. fork of Chiteo Course S 20° E

71.15 " Do opposite shore

82.00 " Intersect Sec. line 104 lks. E. of 1/4 Sec. cor

(Continued on next page)

Township 40 South, Range 18 West.

Establish the $\frac{1}{4}$ Sec. cor. center of Sec 35
 52 Chs. West of temporary post, at the
 intersection of the true lines dividing Sec. 35
 Bearings from true center of Section.
 76. Stumps with notch S. 10° 55' E.
 Left side of big stump at top S. 62° 45' E
 Oct. 19th 1881
 John G. Gifford
 County Surveyor

Township 41 South, Range 18 West.

Survey No. 60. --- Amie and Blake

Began at the N.E. cor. Sec. 16 in Miller Co. by's post
 1.75 chs. To corner of Blake's field
 6.00 " Along a fence to a cross fence E. & W.
 29.75 " Cor. of fence S. N. & S. E.
 43.25 " Summit of bank sloping to beach
 45.00 " Re-establish cor. to fract. Secs. 15 & 16

From the $\frac{1}{4}$ Sec. cor. to same Sec. 15 & 16

11.50 chs. Fence M. & C.
 24.50 " Edge of deep gulch Course South
 27.96 " To opposite side of deep gulch.
 47.00 " " The County road
 49.15 " " Intersect E. bay. of Claim 43
 Fence

On E. bay of Claim 43.
 10.15 " Set a temporary post

Fence Continued on next page

Township 4th South, Range 13th West.

West	From South bay of Claim 413	
"	30.85 chs. Bank of deep gulch Course S. 25° W	
"	31.96 " Do opposite bank.	
"	38.88 " Bluff. Shore of Pacific Ocean Set a post Thence	
North	10.15 chs. Do a point in meadow Thence	
West	12.11 chs Do 1/4 Sec. Cor. between Secs 15 & 16	

Side notes and Corrections.

Set a post at NW. Cor. of lot, No 5 in Sec. 15 from which
 A line about 18" dia. bears N 88° W 176 lks. marked S. N. 2.

For the re-established Cor. to fract. l. Secs 15 & 16
 on the Shore of the ocean. The claim the awarded
 in U.S. Notes is marked anew - Toward,
 A hole 30" dia. N 77° E 23 lks.
 Willow Spring diam. 8" dia. (in water) East 3 lks.
 Oct. 15. 1881.

From the NW. Cor. of lot 5 in Sec. 15 - Return Blake
 and Aurille.
 10.85 chs. do N.E. Cor. of lot No. 5. Set a post
 Marked S. 5. If witness by bearings as follows.
 Eastern Extremity of Goat Island bears S 70° 40' E
 Charles - Vernier turns right ^{Point Fremont} N. of Goat Island 10 5
 West Extremity of Goat Island N 83
 Top of a rock off shore other rock 13° 42
 Top of ~~other~~ rock off shore left side 26° 29'
 " " " 1st. " 29° 8'
 Summit of rock on shore 57° 20'
 N.E. cor. Do a Cor. 20 chs. N. of So. Cor. of Sec 15.
 Oct. 16, 1881
 John P. Fitzgibbon
 Co. Surveyor.

From Charles State at
 E. & W. Cor. of Claim 413 marked

North

Lower half of South Range 13 West

Survey No. 61 - A. F. Miller -

Began at the SW cor. of Donation Claim No. 48.
 3.80 chs. 20' from fence over fence to 100 chs

North	10.60 "	West 1700 chs	} along shore of Ocean
"	3.37 "	" 6.50 "	
"	5.00 "	" 17.18 "	
"	2.52 "	" 1.82 "	
"	2.16 "	" 1.50 "	

Total North 27.00 chs

to the N. by of the Macklin place
 100 chs. N. of Miller's Stone lot a

North 18.50 chs

first marked A. F. Miller

Macklin's 115.50 "

to the S.W. cor of the Macklin place. See note

East 10.00 "

to the West by of Miller's Donation Claim

and S.E. cor of Macklin's place.

Oct 19th 1881

John F. Smith
 County Surveyor

Ownership 40 South Range 1874 West.

Survey No. 68 - J. H. Schanck -

Begin at the corner of Sec. 7. 18. 12. 13

East	10.50 chs.	Summit of low fence ridge
"	20.00 "	Set a Stake
Fences		
South	11.10 chs.	To a brushy hillside. Offset 200 chs west
"	15.10 "	Offset 200 chs E. to line
"	20.00 "	Set a Stake
"	30.00 "	Small Stream Course SW
"	32.50 "	Schanck's house bears East about 5 chs.
"	40.00 "	Deep gulch. Set a Stake.

(Survey incomplete)
Description of Schanck's place.

N.E. 1/4 of S.E. 1/4 of Sec. 13 T. 12 S. R. 14 W.
N. 1/2 of NW 1/4 " 18 " " " 13 "
S.E. 1/4 " NW 1/4 " " " " " "

Oct. 21. 1881
John P. Hough
County Surveyor

Township 37 S. Range 14 E. 15 West.

No. 63. — Antone Delinfont.

R 1/2 W

From the corner of tract Sec. 14 E.

East 25.00 chs. Summit of prairie ridge SW 1/4 NE

" 26.69 " Cor. of Sec. 14 E. E. hdy. of 76.

R 1/4 W

East 13.00 chs. Summit of Spur Slopes SW

" 20.00 " 1/4 1/4 cor. N.E. Cor. of Antone's Claim

Witness — Red fir 60' or. behind E 1/4 Wks.

Thence from the 1/4 Sec. Cor. between 74 W. and 75 W.

E. bay. of S. 37 S. R 15 W.

West 7.38 chs. left bank of Hunter's Creek from N.E. corner W.

" 22.00 " 1/4 triangulation. And retrace to cor.

" Set a witness post above point N. of the cor.

From the same corner as the above 1/4 S. cor. E. bay. of

East

5.50 chs. left bank of Hunter's Creek near N. 1/4 W.

" 8.28 " do opposite shore.

" 14.50 " foot of hill. N. 1/4.

" 16.18 " Summit of Spur Slopes North.

" 20.00 " Set 1/4 1/4 cor. (Antone's S.E. Cor.)

Witness. Above S 60 W 47 Wks

July 13th 1882.

Antone Delinfont's Delegation.

E 1/2 of N.E. 1/4 of Sec. 12 S. 37 S. R 15 W.


1/4 " NW 1/4 of Sec. 7 S. 37 S. R 14 9th W.John P. Schenk
County Surveyor

)

O

O

Flora. 898. Kang. I & W.

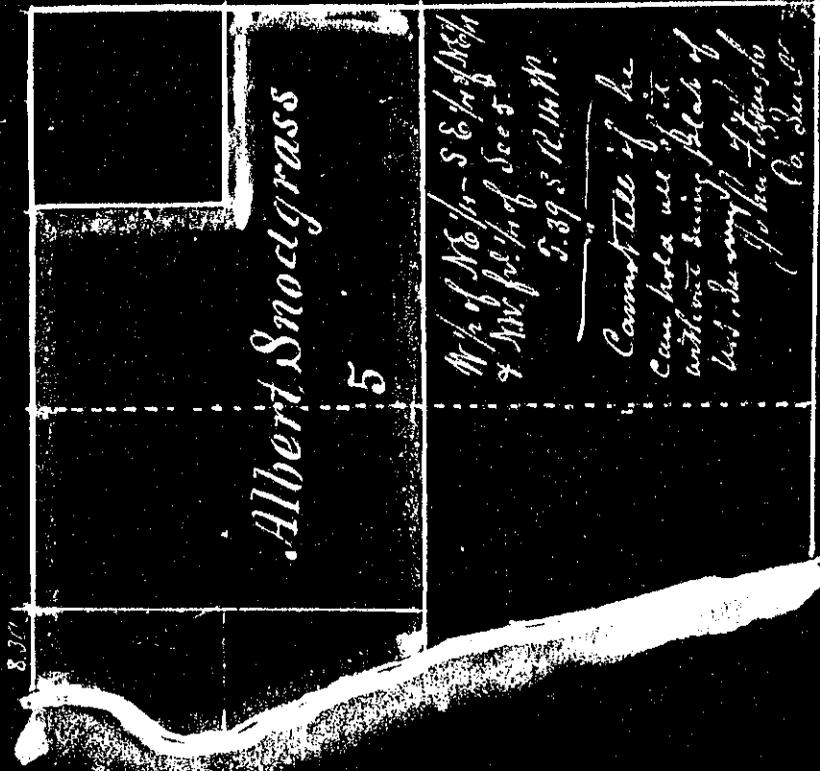

Albert Snodgrass


5

1/2 of No. 10 - S. 6. 1/2 of No. 10
7 No. 10. 1/2 of No. 5

5. 39 S. R. H. W.

Cannot tell if he
can take all of it
without being plait of
his. See my (1/2) of No. 10
(1/2) of No. 10
No. 10

Scale 20 chs to 1 inch.



Township 37 South, Range 14 & 15 West.

Survey No. 64 - Dennis Collins

From the 1/4 cor. on the line between Secs. 18 & 18
11.29 chs - To fence cor. in bottom. Collins house
line West 3 chs. Crute bears 50 Mo.
East. Runs N 20 W
To point on gravel bar, west Crute,
had way into town corner

4.22 chs. To left of Crute in Prairie,
Fence

1.16 Chs. To N. bay of Claim
Fence

20.00 chs To a point near the shore Set at camp / post
Fence July 14th 1882

40.00 chs. To Collins' SW. Corner of Sha State
Fence

6.00 chs Up hill to Summit
Fence

11.50 " To a snag on the line blazed on a mark
July 18th 1882
John Pittsburgh
County, Wyoming

Township 39 S. Range 14 West

Survey No. 65. - Snodgrass

From the cor. of Secs 14 & 5 N. bay of Sec
20.00 Set 1/4 cor - 10 1/2 marked X for cor -
38.00 Crute 40 chs wide across S. 1/4
68.30 Show of Pacific Ocean

General beginning of Coast S 25° E
March 14th 1882.

John Pittsburgh
County, Wyoming

Township of South Range 14 of 16 West

Survey No. 65 — Point South of C. Kings

North
 Begin at the corner to Sec. 12. 13. 79 18 on Sp. line
 5.00 chs. Picket fence N 50° W S 37° E

Offset West 400 chs. to picket fence N 78

9.50 "

" 100 "

22.50 " To line S 40° W was assigned No. 14 of Sec 13
~~To 1/4 1/4 Cor. Section of Sp. line~~

Set a witness post. 4 chs. West
 from the 1/4 1/4 Cor.

Thence West — on E. line of Sec 13

West 16.50 chs. Summit of ridge of trail

" 20.00 " To 1/4 1/4 Cor

Thence South

South 53.6 chs. To line fence formerly built between
 Smith & Collins

From the Cor. to Sec. 12. 13. 79 18
 14.64 chs. Making 1/2 mile from Smith's & Collins'
 fence showing the cap. certain west

And thence

July 15th, 1882 John P. Duffough

County Surveyor

Plat on page 75

Township 38 S R 14 W.

Survey No. 67. Birmingham & Hamilton.

Measures from the Cor. to fractⁿ. Secs 7 & 18
 N. 23° W = 7

Begin at the manner post Cor. to fractⁿ. Secs
 6 & 7 B.S.S. R. 14 W.

10.00 chs ascending rocky hillside to $\frac{1}{4}$ Cor.

20.00 chs West of $\frac{1}{4}$ Sec. Cor.
 March 7th 1882. John McLaughlin
 County Surveyor

East

Survey No. 68. Care McLaughlin

From Manner post between Secs 6 & 7
 crossing a Creek

S 116° E	8.00
S 21° E	6.00
S 107° E	3.50
S 25° W	5.00
S 17° W	20.00
S 48° E	15.00
S 15° E	33.00

S 22° E	31.50
---------	-------

To Cor. of fractⁿ Secs 7 & 18

Thence in Sec. 18

To SW Cor of lot 1 in Sec. 18

March 7. 1882

John McLaughlin
 County Surveyor

Township 36 South, Range 14 West

Survey No. 69 - Capt Hamilton

Begin at a point S. 17 chd. South of
the $\frac{1}{4}$ cor. 10 chs East of Meander Cor.
Section Sec. 697 Thence measured

N 70° W 8.50

N 35° W 8.50 To Meander post between Sec. 697 & 698

N 48° W 3.50

N 20° W 18.711

No. 70

John P. G. Case

From the $\frac{1}{4}$ cor 20 chs. S. of N. C.

West 13.00 To Stake & Corner Thence measured

S 5° E 20.00

S 30° E 12.00 To $\frac{1}{4}$ cor. of Sec. 6

S 3° E 13.00 To line between Secs. 697 & 698

From the $\frac{1}{4}$ cor. 20 chs East of N. C.

$\frac{1}{4}$ S cor. on N. line of Sec. 6

East 19.00 Chs Enter Spring for timber

" 20.00 " Marked bed for same. To $\frac{1}{4}$ cor.

March 8th 1882

John P. G. Case

Cornelia Manning



10

11

12

Township 40 South, Range 14 West.

Survey No. 71 - George S. Harris -

Begin at the 1/4 Sec. Cor. on the East boundary of Sec. 26 - Thence

15.00 chs. Creek Course S.M.

20.00 " Set a 1/4 1/4 Cor.

Witnesses

Paulan 11' across of 3' high N 86° E 22 lks west.

" 3' " " 4' " S 64° E 140 " "

Draw the 1/4 S. Cor. on N. bay of Sec. 26

20.00 chs to 1/4 1/4 Cor.

Thence

20.00 chs to 1/4 1/4 Cor.

Thence

X Go the East by bearing only

June 18th 1882

John Fitzhugh
County Surveyor

Survey No. 72 - George S. Harris -

Begin at the S.E. Cor. of Sec. 26 (S.E. Cor of Sp.

20.00 chs. 1/4 1/4 Cor Set a Stake

40.00 " " " " " "

60.00 " " " " " "

Thence

20.00 chs. 1/4 1/4 Cor. Set a Stake (George S. Harris

owns all of Sec 26 except N 1/4 of Sec 26)

June 19, 1882

John Fitzhugh
County Surveyor

Township 40 South, Range 14 West

Survey No. 73 - John Cresswell

Begin at the center of Sec. 23 of a
State Lot by F. W. Colbrook County Surveyor

North 10.50 chs Crust runs Nesterly -
" 15.00 " Eastern Prairie
" 34.57 " " Timber
" 40.00 " Found No corn and set a stake for 40.00 cor.

Then from the ^{top S. corner} E. bay of Sec. 15 by
bearing only to the corner.

June 21st 1889

John Cresswell
County Surveyor

Township 34 South, Range 14 West

Survey No. 1 - William Woeburg

Begin at North West Cor. of Town 34 S. Range 14 W.

South 34 East in Sec 6

3.50 Chs.

" 2 1/2 E. 30.00 Cr.

" 13 " 10.00

East 3.00

75-lks. To 1/4 corner

October 20. 1882.

George Fitzhugh
County Surveyor

Survey No. 2. W. H. Merrill

Nov. 4th 1882

beginning in Township 34 South Range 14 West

Range 15 West. From Cor. to Sec. 2. 3. 34 & 35.

76.13 1/4 post in S. John Fitzhugh

36.13 1/4 Sec. Cor. Reestablish by Marking

A Fir 18 in in dia bears N 80 E. 310 lks. dist.

" " " " N 31 W. 50 " "

14.47 To Floras Cor. 150 lks. road. Course W.

46.18 In Browns field

53.50 Left bank of Floras Cr. offset 100 lks East

56.13 Left 1/4 post 100-lks E. of line cor. on L. bank Floras Cr. from which

A Spruce 48 in in dia bears S. 14 W. 39 lks. dist.

" " " " S 23 E 80 " "

" " " " S 23 E 80 " "

George Fitzhugh
County Surveyor

Township 31 S. R. 15 W.

Survey No. 3 - D. P. Brown.

Nov. 4 1882.

From a point 20.00 chs North of Cor to Sect 23. 108 N

and 700 lbs East of the line on L. Pt. Stone Cr.

S 31° E

4.00 feet 50 lbs to L. Pt.

"

6.50 feet 50 lbs. across a stream 3 lbs with corner NW on the line

"

2.00 chs. to Cor. from which

A For 20 in on the S. 6° W. 71 lbs dist

"

" 44 " " N 66° W 85 " "

"

" 24 " " N 20° E 29 " "

"

" 20 " " S 40° E 45 " "

George Fitzmaugh

County Surveyor

1885

Wm G. Emery

Nov. 2 1882.

From 1/4 Sec 1st T. 21 N. R. 15 W. Township 37 South

Range 15 West

East

2.000 chs. dit 1/4 Sec post from which

chs. Alter 12 in in the line S. 53° 15' N. 58 1/2 chs

ed Cherry 8 in " " N 35° 30' E 78 in dit

George Fitzmaugh

County Surveyor

Township 31 T. 14 N. Range 15 - West

<p>N. 76. School District - N. 13. Beginning at a point 24.61 chs East of 1/4 Sec. Cor. Bet. Secs. 10 & 15 - Township 31 South Range 15 West - for 19.65 - E</p>		<p>Nov. 17th 1882.</p>
<p>N. 76 1/2 E. 3.46 chs. thence West " 5.48 " South " 6.46 " East " 2.34 " North " 2.73 "</p>		
<p>N 24 1/2 E 1.50" To place of beginning. Containing 2. acres. On the each Section George Fitzhugh County Surveyor</p>		
<p>East South</p>	<p>N. 77. - James Hall Beginning at 1/4 Sec. Cor. Bet. Secs 9 & 10. Township 31 South Range 15 West. thence 20.00 S. 1. 1/4 Sec post from which A Pine 6 in in dia bears S. 79° N. 2. 1/2 c. to about 40.00 S. toward Section Center boundary of Sec 12 Set Stake from which A Pine 14 in in dia bears N 15-55- W S 7 1/2 chs about</p>	<p>Nov. 9. 1882 Nov. 10. Township County Surveyor</p>
<p>West</p>	<p>N. 78. - Henry Nelson (unpublished survey of John Fitzhugh from a stake marked S. 7. 26.50 West on the line 13.50 To base of claim Set by 1/4 Sec. from which A Pine 7 1/2 in in dia bears N 86 1/2 W. 160.00 chs about</p>	<p>Nov. 10. 1882.</p>

Township 31. South Range 15 West

East	<p>From Post Cor to Sec 23. 348 35 On Township line Red-sec 23 35- 9.83 A stream 5 lbs wide course S. E. 15.20 " Exam " " " N. W. 21.75 County Road bears N 87 E. 27.00. No post or trees to be found.</p>	<p>County Surveyors</p>	
North	<p>Nov 9. A Barren beginning at Cor. to Sec 26, 27, 34 & 35. Township 31 South Range 15 West Twp. Mer. Nov. 1905 East 17.75 Wagon road bears E. 87 W. 18.00 " " " N 60 W 8 S. 60 E. 20.00 Ch. set 1/4 1/4 post from which An X-Marker 16 in in dia bears N 57 1/2 W 14 lbs dist. - Tracer 7.25 Wagon road to Cor. Nelsons bears S 44 E 9 N 45 W. 34.00 " " " Mountain E 8 W. 37.00. " " Wagon road bearing South 87 E. 40.00 set 1/4 1/4 post from which A Fir 18 in in dia bears N 12 W. 26. No dist. " " 18 " " " S. 60 E 18 " "</p>	<p>Nov 10. 1882.</p>	
East	<p>Nov 10 For Brown & Gaurin From 1/4 1/4 Sec post - Lt Near Gaurin house. 1.00 Cor. Trees Cor. 6-8 lbs wide course West 8.50 Wagon crossing 5-8 lbs East 20.00 set post from which An X-Marker 14 in in dia bears N 52 E. 30 lbs dist " " 4 " " " S 33 W 180 "</p>	<p>Nov. 10. 1882. Nov. 1905 - East</p>	<p>County Surveyors</p>

George F. F. A.

Township 31 South Range 15-West - Wall, W. Ver.

Survey No 18 Chris Long

Nov. 23. 1852.

From a point on line between Sec 38 to 20.00 chs.

East from 1/4 Sec Cor. Township 31 South Range 15-West

7.25 - A stream 5-6 chs wide Course N 75 W.

10.00 chs Leave Green timber and enter clearing

20.00 To Sec. Cor

George Fitzhugh
County Surveyor.

East

"

"

No 14 - Matthew Doyle

January 5. 1853.

beginning at the South W. Cor. to Lot No 5 in Sec 25 -

Township 36. South Range 15-West Thence

S 48 1/2 W. 11.20 chs. Thence

S 53 1/2 E. 4.85 " "

S 72 E 2.69 " "

N 73 E 3.70 " "

N 42 1/2 E 3.08 " "

N 8 W. 1.72 " "

N 73 W 6.74 " "

N 57 E 4.20 " "

N 159 " "

To place of beginning, and containing five and eighty hundredths acres. Fide same

From a point 5.67 chs West of South W Cor to Lot 5 in

Sec. 25 Township 36 South Range 15-West. Nov 1935 East

From thence along U. S. Meander line

N 53. W. 11.75 chs. Thence

West 6.50 " "

S 29 E 10.43 " "

S 56 E 6.34 " "

N 55 E 8.95 " "

To place of beginning and containing eleven and

72 hundredths acres. Fide Land

George Fitzhugh County Surveyor

Township 31 South Range 15 West.

Survey NE 15-	Abraham Cox & D. C. Anderson Beginning at 1/4 Sec post - Return. Cont 14 3/4 Acs. Dec 1905 - E. 2	January 13, 1883.
N 79 30 W.	across Sec 15 -	
"	225 - Top of ridge	
"	20.00 Chs. Let 1/4 1/4 post - from which	
"	A Willow 5 in in dia bears S 1 1/2 E. 5 lbs dist	
"	" Fir 30 " " " S 31 W	
"	30.50 Willow Cor. 30 lbs with course North	
"	40.00 Let 1/4 post - from which	
"	A Fir 24 in in dia bears S 63 1/2 E 22 lbs dist	
"	" 24 " " " S 52 W 57 "	
"	60.00 Chs. Let 1/4 1/4 Sec post - from which	
"	A Cedar 24 in in dia bears N 61 1/2 W 4 lbs dist	
"	" Fir 36 " " " S 34 1/2 E 74 " "	
"	From Thence	
South	29.80 Chs. Let 1/4 1/4 Sec post - from which	
"	A Cedar 30 in in dia bears S 70 W 30 lbs dist -	
"	34.60 Let 1/4 1/4 post - from which	
"	A pine 7 in in dia bears N 71 E 17 lbs dist	
"	" 7 " " " S 84 W 14 " "	
"	From Cor. to Sec 15-16. 21 & 22.	
N 89 36 E	On line Return Dec 15 & 22.	
"	11.00 A thorn 4 lbs with course S. W.	
"	200 Corn 1/4 1/4 Sec.	
"	40.00 1/4 Sec post	
"	60.00 1/4 1/4 Sec post - from which	
"	A Spruce 11 in in dia bears N 68 1/2 W 83 lbs dist	
"	Willow 9 in in dia bears N 89 W. 7.01 lbs dist	
"	From Thence	
"	20.00 Chs. Let 1/4 1/4 Sec post - from which	
South	A Cedar 50 in in dia bears N 26 1/2 E 1 1/2 lbs dist	

George F. Thompson
County Surveyor

Township 31 South Range 15 West

N²/6 - J. Bantons January 17, 1883.
Beginning at the 1/4 Sec post - Return Sec. 15 R. 20.

20.00 Chs above Stake From thence
4.00 " Rock ridge Ed Goods lookout
17.00 Chs E. Goods house S. 2.00 Chs.
19.50 Stream 6 Chs wide course N 25° W
20.00 Chs above stake.

40.00 Set 1/4 post - from which
N Cedar 60 in in dia bears East - 2 Chs dist
" Spruce 20 " " " West 20 " "
From Cor. to Post 15:16. 218 22.

13.00 Chs County road bears N E. 25° W.
20.00 Set 1/4 post - from which
N Cedar 14 in in dia bears S 25° W 43 Chs dist
" " 48 " " " S 55° E 1.02 " "

From thence 1/4 Range Stake East -
George Swift
County Surveyor



Township 40 S. R. 13 W

March 20, 1883.

Surveyor Henry Smith

Beginning at 1/4 post on line bet. Sec 22 & 33 in Town 40 S. R. 13 W

2.00 Chs. point of hill angle 30° faces East
5.00 " top of hill

16.50 Cr. 5 Chs wide course S. 20° E.

40.00 Set 1/4 post center of Sec 32. from which

N 70 in in dia bears S 15° W 22 Chs dist.

" " 12 " " " S 66° W 21 " "

George Swift

Township 40S R. 14W¹³

Survey No 18	Mrs. Hannah Bryson	March 20	1883.
North	From 4 th Sec cor on line bet Secs 32 & 33.		
"	6.00 chs. Cor. 2 the mid. course S.W. West-up hill angle 30°		
"	4.00 chs. Continuing up hill to 1/4 cor. from which		
	A line run 8 in on dia base N 58 1/2° E 87 1/2 chs Dist - Record made May 8 1883. George Fitzhugh County Surveyor		
Survey No 19	Schank and Duly	March 21	1883
South	Retracing old line		
"	From cor. to Secs 7, 12, 13, & 18 on range line bet. 13 and 14 West - 70 South		
"	Down hill angle 30° faces S.E.		
"	6.00 chs foot of hill		
"	20.00 Under rocky knob		
"	40.00 Set Stake in stone mound		
West	80.00 Cor. to Secs 13, 18, 19 and 24 from stone		bet. 13 & 24
"	20.00 chs. Set 1/4 ch. stake from which		
"	A for 10 in on dia base S 83° N 79 chs Dist -		
S 50 1/4 W	22.15 leave line and run on bearing 1		
S 83 1/4 W	10.60 same		
North	7.00 same		
West	10' Set line and 1/4 cor. No sign of post or witness		
"	80.57 Sec. cor. from which		
North	A for 40 in dia base N 25 1/2° E 17 chs Dist -		
"	Line run 14' in dia base S 54° W 16 "		
"	for 36 in dia " S 7 1/2° E 48 "		
"	This line has evidently never been run		
North	Set. Secs 23 and 24		
"	20.00 chs offset East West 6.62		
"	4.00 " " 6.62 (opposed) line		

Township 40 South Range 14 West

North - Sect. 23 and 24 continued
 at 40.00 chs could find no post or witness set block on hill side
 8000 chs. to Cor. 13.14. 23 and 24, already described
 — From thence —
 West - 2000 chs. Marked his oak 8" in dia for 1/4 1/4 cor. and thence on offset -
 South - 6.32 thence
 West - 2000 chs. To a point 6.32 chs. South of 1/4 post-Post. Sect. 14 and 23.
 Let Range stakes for West boundary of Jewly's claim
 George F. Foyth
 County Surveyor.

Survey No 20 For Green Gorge April 14. 1883.

In Township 34 S. R. 14 W.
 From 1/4 Sec post- Post- Sect. 29 and 30
 4000 chs. To Cor. 19.20. 29. and 30.
 Sect. 19 and 20.
 4000 1/4 Sec. cor.
 6000 1/4 1/4 post from which
 e 8' e Myrtle 15' in in dia bears N 78° E 91' to Dist
 From 1/4 Sec cor. Sect. 29 and 30.
 on line bet. Catbrook and Cary claims
 2000 chs. 1/4 1/4 post from which
 e 9' e Cedar 20' in in dia bears West 2 chs dist -
 George F. Foyth
 County Surveyor

County Surveyors Record, Town 30 S, R. 14 W, Sec 1

Survey No 21 Charles Longless
 from cor to Township 30 S Range 14 West on Range line Bet
 14 and 15 West Run North 2 miles and 2.55 chs. before
 finding any post from which to measure
 ———— Thence running South
 on true line bet Ranges 14 and 15 West
 8.40 1/4 post in R 15.
 35.00 Cor. Course N. N. W. 10 chs wide
~~37.50~~ 40.69 1/4 Cor.
 44.52 Cor. To S 60° 25 and 56 in Range 15 -
 55.00 Cor. Course East 3 chs wide
~~77.00~~ 81.38 Cor. S. 60° 30 and 31
 77.00 ~~81.38~~ N 30 E
 7.40 1/4 post in Range 15 -
 200 perpendicular bluff 50 high faces North
 on offset 200 feet.
 1.39 Chs Making 21.39 South to 1/4 cor.
 200 chs begin line and set 1/4 cor. in chain - angle in air
 42.07 chs Set 1/4 cor. from which
 N for 20' in dia bears N 85° E 74 chs dist
 42.75 is join. con.

April 28 1883.

Records May 7 1880
 George F. Foy
 County Surveyor

Township 37 South, Range 15 West

No 22	Erasmus Thorburn	
	From 14 Sec. post Belt 26 & 35	
	Through 26	
"	5.00 Chs. Open brush land. Level	
"	70.00 Pine brush	
"	14.50 Dry gulch course N 45° W.	
"	15.00 Willow bottom	
"	20.00 In Timothy meadow	
"	25.00 Lalmom brush bottom	
"	30.00 Fern and alder brush. Ground sloping S and W	
"	37.50 Creek 30k wide course West	
"	40.00 Belt 14 post. center of Sec. 26. Marked Alder trees	
West	From thence	
"	5.00 Mrs. Small Slough course North	
"	10.00 Ridge. Green fir timber	
"	15.00 Fern and alder.	
"	20.00 Belt 14 1/4 post in Maple Bottom Marked Maple trees	
	June 21 st 1883.	
	Geo. Fitzhugh Co. Surveyor.	
No 23	G. L. Wilson	
	From Cor. to Secs 17, 18, 19 and 20. Join. 34. S. 12. 14. West.	
S. 89° 34'	12.50 Chs. Summit of ridge N & S.	
"	19.50 Cedar 60 in in dia	From which
"	20.00 Belt 14 1/4 post	
"	6 9/16 Alder 8 in in dia bears South 85° West - 6 1/2 dist.	
"	25.50 Gulch bears S 20 E.	
"	43.50 Stream 30k wide course South	
"	75.50 North fork Mashed Cr. 70k wide course S 50 W.	
"	80.16 To Cor. 16, 17, 20 and 21.	
East	From thence	
"	Belt 16 and 21	Unsurveyed land
"	20.00 Chs. 14 1/4 post	from which
"	A Live Oak 10 in in dia bears East 60k dist.	

Township 34 South Range 14 West

G. L. Nelson (continued)

From thence

13.00 chs. North fork muskrat Cr. 6 chs. thence course West
 Down hill at angle of 37°
 18.00 chs. Uphill from creek angle 35°
 20.00 Set 1/4 post from which
 N For 14 in. in dia bears N 50° W. 6 chs. dist.

From thence

11.00 chs. Cr. Course South
 20.00 Intersect Section Ret-16 and 17.
 Set post from which
 29' Sargent Oak 16 in. in dia. bears N 15° W. 9 chs. dist.

From thence

12.50 chs. e North fork muskrat Cr. course S. 60° W.
 20.00 To Sec Cor.
 Cont. 387 788.

Geo. Fitching Co. Surveyor

e Rehor Post } Chainman
 John Arroy }
 Fred Fishner exman

N^o 24

Jeese Carey. corner mark
 From a point - 20.00 chs. North of 1/4 post - Set Sec

19 and 20 from post from which

e 7 e Myrtle 15 in. in dia. bears N 78° E. 91 chs. dist.

5.00 chs. Trail to Jeese Careys lower bears S 20° W.

8.00 Top of Ridge S 30° W.

15.00 Dry gulch South

20.00 Set 1/4 post from which

e 4 e Myrtle 4 in. in dia bears S 83° E 13 chs. dist.

" " " " " N 15° W 7 "

22.00 chs. Strip hill side slopes SW.

29.25 Cr. Bottom S 60° W.

Township 34 South, Range 14 West

East 32.50 North fork mussel Cr. 5 lbs. wide S 45° W
 " 32.75 Foot of hill slopes NW. angle 40°
 " 40.00 1/4 post from which
 A Myrtle 18 in. in dia bears N 20° W 94 lbs. dbt. -
 from ~~thence~~ 1/4 Sec post - dbt. 20 and 29
 Reestablished the corner by Marking
 A Myrtle 24 in. in dia bears S 8 1/2° E 77 lbs. dbt.
 " " 30 " " " N 55° W 74 " "
 From thence
 North 40.00 chs. dbt 1/4 post for center of Sec from which
 A Hazel 3 in. in dia bears S 25° E 6 lbs. dbt -
 " " 4 " " " N 10° W 8 " "
 Oct. 4 and 5 - 1883. Geo. Fitzhugh Co Survey

N 25

Louis Knapp - November 15, 1883.
 Bearing at a point 4.54 chs. East from cor to Sec. 4. 4.
 32.833 at intersection of said line with line of claim 37. and line

North

2.75 chs. dbt 1 N 30° W.
 7.50 " Same green brush and into burnt woods E. of W.
 15.00 dbt 18 bears N 75° W.
 29.58 To Cor. to claim 37. from which
 A Fir 30 in dia bears S 34° W. 37. lbs. dbt -
 " " 7 " " " N 48° W 39 "
 A Cedar 18 " " " S 59° E 29 "
 From thence -

East

2 1/2 hill - burnt woods -
 15.90 Summit of ridge N and S.
 22.5-0 chs. dbt 18 course S 55° E.
 30.00 " Same " East -
 35.25 " Cor. to claim 37. from which

Continued on page 96

C. County Survey no. Record
Township 32 South Range 16 West

Some (see kind)	
North	<p>A. Pier 40 m dia bears S 54° E. 20 lbs. Dist.</p> <p>" 8 " " S 51° W. 35 "</p> <p>" 30 " " N 26° W. 40 "</p> <p>From Thence 33</p> <p>10. 4 cks. Center of Sec. 33. Et altho and line to ...</p> <p>" 40 m dia bears S 10° W. 24 lbs. Dist.</p> <p>A. Cedar stump 14 " " N 25° E. 10 "</p> <p>Thence East</p> <p>Burnt 40 Woods, Level Country</p> <p>22, 50 cks. Cr. 3 lbs. Wide course South</p> <p>3800 Small cr. course South</p> <p>4000 " Subsect Section line at 4 Dist (No trace ...)</p> <p>Reestablished. Same by marking</p> <p>A. Cedar 5' m dia bears S 78° W. 10 1/2 lbs. Dist.</p> <p>" 3 " " S 38 1/2° E. 14 "</p> <p>Thence South</p> <p>Burnt Hill - Old logging stands - Dist 328 m.</p> <p>16, 25 cks. (1st) Old road bears N 40°</p> <p>27, 25 " " " " "</p> <p>41. 00 " 1st Cor. to Sec. 3, 4, 33 & 34</p> <p>Recorded Nov. 18, 1853.</p> <p>George Hittings</p> <p>County Surveyor</p>
East	
"	
"	
South	
"	
"	
"	

See Townships 30 South and 15 West

No 26

Survey made for Nelson and Long's
Reclaiming Sec line.

January 10, 1854.

Run North 1/2 Sec. 26 of 27, as follows.

20.00 ch. set 1/4th cor. from which

Cedar 13' in dia bears N. 5° West - 18 links dist -

40.00 1/4 Cor. found witness tree lying down but still alive

George Fitzhugh
County Surveyor.

No 27

Survey for N. C. Lountzen.

Beginning at 1/4 Sec. Cor. Sect 16 of 17 Township 30 S. R. 15 W.

100 lks Enter low Spruce Bottom.

7.50 Low timber and enter swamp

12.00 Cross Salmon Cr. 20 lks wide, North

14.50 Lean Cr. Cor. Enter spruce timber

20.00 Set 1/4th Stake Cor. to Lot 4.

28.40 Intersect shore of Steno Lake and W. Main Cr.

Run Eastern boundary of Lot 4 as follows

Beginning at South East Cor of Lot 4 at 1/4th Stake and run

14.66 chs. Intersect shore of Kurodun and at other

Line continued

Set. Sec 8 and 17 returning, as follows begin at Cor. to 16, 17, 89

5.50 ch. Wagon road N. East S. W.

18.50 " Wagon road N. S.

20.00 " Set 1/4th stake from which

A Run 10' in dia bears N. 1 1/2° W. 50 lks. dist

21.00 Sand ridge N. S

38.80 Intersect shore of Flores Lake and at Main cor from

Witness tree still standing (to wit -)

A Spruce 9' in dia bears N. 15° E. 76 lks. Dist.

George Fitzhugh
County Surveyor

March 10, 1854.

County Surveyors Record.

No 28	<p>Township 31 South Range 13 West For N. E. Lorenzen & J. W. Minton From a point 20 chains West from the ^{the} 1/4 cor. Sect. 10</p>	Sec 10
North	<p>12.16 ch. Dry Litch course West 13.05 " " " West 20.04 ch. 1/4 cor. on center of clearing from which N for Alder base S 5° 45' E. 82 ch. Dist " Pine Mumps 16 dia 4 ft high base N 79° West of the Dist Fence Run west without measuring and on level a line run at a former time, running N & S through center of Sect 10 find old Stake 20 ch north from where we intersect line June 28th 1884 E. J. F. Hugh B. Lewis</p>	
North	<p>Survey for John Blacklock From a point 8.15 ch. South of 1/4 Sec post on line Sect 28 and 90 ch on established cor. dividing Lot 2 in Sect 28 S. 05- 1/4 Sec. Cor. Reestablished from old S. B. which was being down but in a good state of preservation. and continued North along Township line Sect. Ranges 15 & 16 West 40.00 ch. No sign of old cor. remaining Sect. 10 post dimly George F. Foy & Co. Surveyors</p>	June 9 th 1884
No 29	<p>For A. Bunker Location of Anchor Bays, Law Water, and N. Y. N. From first station North East Bay Base S. 89° 30' W. N. W. " " S. 86° W. S. E. " " S. 36° 15' W. S. W. " " S. 65° 45' W. Outside Bay S. 62° W.</p>	October 22 nd 1884

Co. Surveyors Record.

<p>Continued from Opposite page From Station 1 to Station 2 Bears S 93° 30' E</p>	<p>S. E. Bay Bears S 66° W from Station 2 N. E. " " N 87° W " " " S. W. " " S 72° W " " " N. W. " " N 86° W " " " Outside " " S 66° 30' W " " " George Fitzhugh</p>		
<p>Nov 30 East</p>	<p>To Edgar Mason and Erasmus Tothaus, November 17th 1884 From 1/4 Sec. Cor. Bkt. Sec. 2, 26 & 35 Run East 7.250 ch. County Road N. E. & S. W 74.75 " Creek 5 ch. N. W. course, N 30° W 21.71 " 1/4 1/4 Cor. marked on older 7 dia. for Bkt from which Another older 8 dia brass N. 73° W. 5 links Disturb- George Fitzhugh Co. Sur'rs</p>		
<p>Nov 31 North East North</p>	<p>For Lorenson Returning line of S. H. Crutch Donation Claim From cor. to Sec. 2, 3, 34 and 35 on Town line Bkt 34 and 37 Sand in Range 15 West and Run North 1.500 ch. to South Boundary of claim 34 and Thence East 17.00 ch. to S. E. Cor. of claim 34. found Co. and witness - two M. H. Standing, from Thence Sub-Range Blake North</p>	<p>Nov. 18th 1884.</p>	

C. S. Surveyors Record for 1887.

Town 31 S. R. 12 E. 12 W.

Survey 1882	Survey made for J. A. Haines Nov. 22 nd 1887.
South	Begin at 1/4 Sec. Cor. on line bet Sec. 25 and 30 in Range line
"	bet Townships 12 and 13 West and 8 th South and run South
"	21.70 ch. to 1/4 cor. 1/4 Sec.
"	35.65 to Dead end Trianglelet from here to a wide Bluff of Rock
"	S 57° 45' N 56.0 chs
"	S 45° E 3.38 "
"	S 87° 30' E 2.65 "
"	S 19.72 " Found Cor. Stake 2 rods. to East of line run in
"	North on correction
North 1887	21.70 ch. bet 1/4 Sec. Cor. on corrected line at range line from which
"	A line for 1/4 Sec. less S 87° 30' E. 6.6 ch. Dist. to
"	There is evidently an error in the Township Cor. north
"	between the Sec. Cor. and 1/4 Cor. which has probably been made by the
"	U. S. Deputy in triangulating around the bluff of rocks
"	from the 1/4 Sec. Cor. thus established as run out-
East	7.00 chs. Cross Hill Cr. Course South
"	1770 ch. into Prairie
"	2070 ch. to 1/4 Sec. Cor. Temp., stand starting from a point 20.0 chs.
"	East from cor. to Sec. 25.30, 31 and 36 run North
North	through Prairie
"	900 chs. West Stake 2 rods further west and run from it
North	Along Prairie like hill slopes West-
"	1.50 chs. Run 15 ch. West of a post set by U. S. Deputy 25 Sept.
"	1150 Enter Timber E & W
"	2700 ch. 1/4 Sec. Cor. from which
"	Run 12 ch. less S 54° 30' E. 44 1/2 ch. Dist.
"	Continue North
"	950 Enter Prairie E & W.
"	1450 " Timber E & W.
"	2000 bet 1/4 Sec. Cor. from which
"	A Cedar 17 ch. less N 55° 30' W 31 ch. Dist.
"	From same Run S. 87 W.

County Surveyors Record. T. 31 S. R. 13 W

S 87° W	9,000 ch. Gibbs Creek Course S.W.		
"	13,500 Abound Strip w/oly side hill		
"	16,750 Top of Rocky ridge		
"	2,000 chs. Let 1/4 1/4 Cor. from which A Fir 8' in dia bears N 14 W 12 lks Dist -		
	For same Nov 27th 1884		
	From Cor. 20 Dist. 1, 2, 31 and 36. Township cor. Let 31 and 32 South and		
West	Ranges 12 and 13 West Mill. N. Cor. and sum West 2,070 chs. Let 1/4 1/4 Cor. from which A Madrone 10' dia bears N 65.45° East 8 lks Distant - From thence run North		
North	2,000 chs. Let 1/4 1/4 Cor. from which A Fir 6' dia bears N 22° East 61 lks Dist - These lines had been run formerly by 24 th section - but now in quite material error.		George Fitzhugh Co. Sur. for
No 33	Township 31 S R 13 W.		Nov. 26th 1884
East	For John Caldwell → Begin with Cor. to 11, 12, 13, and 14 and run East 2,000 chs. 1/4 1/4 Cor. from which A Fir 10' dia bears East 41 lks Dist.		
"	4,000 chs. Found old stake lying down but no witness perceivable Reestablished Cor. by Marking A Fir 10' dia bearing South 27 lks. Island. Continued East -		
"	4,000 chs. Caldwell Base line on Right, 10,000 chs. Let Range Stake and returned to 1/4 Cor. and run South		
South	2,000 chs. 1/4 1/4 Cor. from which A Fir 6' dia bears S. 83° E. 28 lks Dist. And continue South		
"	4,000 chs. Let 1/4 1/4 Cor. from which A Fir 8' dia bears S 88° E 17 lks Dist.		
	Continue South -		

County Surveyors Record, for 1884

South	<p>Same Continued.</p> <p>59.50 chs. Dry Gulch course S. E.</p> <p>60.00 " Let $1/4$ Cor. from which</p> <p>A. For 48' dia brass North 80° West 15.1 lbs. Dist.</p> <p>A. For 12' " " South 45° West 11' "</p> <p>George Fitzhugh Co. Surveyors</p>
Survey No 34	<p>For J. E. Hawkins.</p> <p>Beginning at $1/4$ Sec Cor. Sect 8 & 9. Township of 12 N. Range</p> <p>15' West and run North.</p> <p>17.50 chs. New Wagon road to rail timber</p> <p>2000 " Let $1/4$ Cor. from which</p> <p>A. For 4 lbs 6' dia brass S. $74^{\circ} 30'$ E. 9 lbs Dist.</p> <p>Thence East</p> <p>2000 chs. Let $1/4$ Cor. from which</p> <p>A. Spruce 40' dia brass 14° East - 17 lbs Dist.</p> <p>George Fitzhugh Co. Surveyors</p>
Survey No 35	<p>For Mary Anderson & C. J. Rall.</p> <p>From the corner to Sections 8, 9, 16 & 17.</p> <p>On line between Secs 8 & 9 4000 chs. to $1/4$ Cor. and stake</p> <p>From a point, South's meadow from which</p> <p>A. Pine 10 in dia. brass N 34° W 61 lbs. Dist.</p> <p>Without measuring to margin of Flores Lake</p> <p>George Fitzhugh Co. Surveyors</p> <p>January 10 1885</p>

County Surveyors Record A.D. 1885

		Jan	31	1885.
Survey 236.	For J. M. Barry of Elk river			
	Began by setting stake from witness tree			
	Cor. to Sec. 26. 27. 34 & 35 Town ship 32			
	South Range 15 West and run -			
N 89° 30' W	along old line of Survey Pat. Sec. 28 & 34.			
"	725 chs. A fence corner N. E. & S. E.			
"	1250. Road E & W.			
"	13.75 A stream 2 chs. wide course N. W.			
"	14.25 " " " North			
"	40.00. Found no trace of 1/4 Cor.			
"	41.50 Trail S. E. & N. W.			
"	46.75 Stream 8 chs. wide course N. E.			
"	69.60 Trail N. W. & S. E.			
"	79.00 Intersect Sec. line 30 chs. North of Cor.			
	Which reestablished by one remaining tree			
	from thence run North.			
North	400 chs. Set a stake for 1/4 Cor. by witness			
"	tree.			
"	75.25 To bank of Elk river course West -			
"	77.68 On opposite bank			
	81.00 chs. to Sec. Cr. Reestablished same from			
	two witness trees still standing.			
	Thence East -			
East	150 chs. Elk river bears South 10 chs. Dist.			
"	40.00 " Found no trace of 1/4 Cor.			
	Marked at cedar 30 min. dia for Cor.			
	From Cor. to Sec. 26. 27. 34 & 35. and from			
North	Pat. 26 & 27.			
"	8.75 To Elk river 175 chs. wide course West -			
"	2000 chs. Begin to ascend hill bears E. & W.			
"	29.25 A stream 8 chs. wide S. W.			
"	40.00 chs. found no trace of 1/4 Cor.			
"	48.00 " A stream 6 chs. wide West -			
"	68.20 " " 4 " " "			

County Surveyors Record 1885.

North	<p>For J. H. Barry continued 76.50 chs. Summit of ridge E 80° N 80° W. 80.00 " Found no trace of Cor. 2d-Block Cor. to Secs 22, 23, 26 & 27</p>	George F. Hough Co. Surv.
Survey 57	<p>For J. Castello From Cor. to Secs. 11, 12, 13 & 14 12.50 chs. Trail N 75° W & S 75° E. 20.00 " Set 1/4 Sec Cor. and run from thence 10.25 " Rocky ridge E & W. Slopes West- 30.50 " A Stream 2 lks wide N.W. 35.50 " Same " " North. 40.00 " 1/4 Sec Cor. from which An Alder 3' dia bears S 63° 45' E 12 lks. Dist 0.75 " Stream 4 lks. wide. Course North 4.00 " " 8 " " " " 9.00 " " 4 " " " " 13.75 " " 3 " " " N.W. 20.00 " To 1/4 Sec Cor 301-11 & 12 Continue East- 21.50 " Stream 2 lks wide North 26.60 " " " " " 40.00 " Set 1/4 Sec Cor. from which A Greenwood 5' dia bears S 66° 15' W 20 lks. Dist - Fence</p>	Feb, 20 th 1885
West		
North		
"		
"		
"		
East		
"		
"		
"		
"		
South		
"		
"		

George F. Hough Co. Surv.

County Surveyors Record

1885.

		Feb. 21	
Survey 38.	For S. Boice & J. A. Cox.		
	From a point on line bet. Sect 18 12		
	In Township 31 South Range 15 West		
	and 2000 chs. East of cor. to Sect 1. 2. 11.		
	80 12 Run		
West	3.37 lks. To Flores Creek		
	Thence Meander Thru of same		
S 46° 30' N	7.68 chs.		
S 85° 15' N	39.80 "		
N 21° 30' W	8.90. To Sec line in middle of Abtoms		
N 29° 15' N	17.23 "		
South	15.00. To 1/4 Sec Cor. on line bet. 28 11.		
	George Fitzhugh Co. Sur.		
Survey 39		Feb. 23.	
	for Guch Boice		
North	From 1/4 Sec Cor. bet 28 11 run		
"	15.00 chs. To Flores Cr. 2000 chs. mt.		
"	19.25- Wagon road East-West Baria gate		
"	East about 1000 chs.		
"	20.00 chs. bet 1/4 1/4 part from which		
"	An Ash 17" dia bears N 69° W. 89 lks. Dist.		
"	" " 30 " " N 89° 30' W. 62 lks. Dist.		
"	29.00 chs. Foot of hill		
"	30.00. Spur slope West - 20' high		
"	40.00. bet 1/4 1/4 Cor. from which		
East-	A Grasse wood 6" dia bears S 63° 15' E. 30 lks. Dist.		
"	Thence East.		
	2.50 chs. Summit of slope South.		
	20.00. bet 1/4 1/4 Sec Cor. from which		
	A Dead fir 34" dia bears N 81° W. 13 lks. Dist.		
	Geo. Fitzhugh Co. Sur.		

County Surveyors Record June 1885.

Survey No 40 For William Miller Township 36 South Range 14 W
 From the corner to sections 8, 9, 16 and 17.
 Run as follows
 21.00 chains to old Set Stake 1/4 Sec. Cor.
 Thence West
 5.75. Dry gulch course S. 50° W.
 11.80. A Road. N 78° S E.
 11.95. Picket fence (Leop. Millers) N 74° S E. Cont. of. L.
 20.00. Set 1/4 Sec. Cor.
 Thence
 21.00. Set a stake for 1/4 Sec. Cor. on line E. W. striking
 Section 17.

George Fitzhugh (2d) Sur.

Survey No 41.

June 11th 1885

For S. Landiner

From Cor. to Townships 35 and 36 South 2. 21 Ranges
 14 and 15 West. Run as follows.

13.00. Sec. 31 and 36

1.50. Sec. Swamp E and W.

5.50. "Lean Swamp

5.00. "Enter Small Pine timber

15.30. "Open Glade and Ditch runs N.W.

20.00. Set 1/4 Sec. East from which

1/2 Pine 16 inches in diameter bears S. 62.50° E. 32.00. Post -

Thence East -

3.00 Wagon road N.E. and S.W.

17.00 " " and old gate Road N 89° S

47.28 Set 1/4 Sec. from which

A White Fir 10' dia. bears N 44° 48' E 74.00. Dist -

George Fitzhugh (2d) Sur.

Record of Surveys

Survey No. 42.	June 14 - 1885.		
	For Wm. Miller and S. Sarsener.		
	From the 14 Section Cor. Between 5 and 8 Township 36 South		
South	Range 14 West - Run South through Section 8.		
	400 chains and sight through to flag on section line		
	Between Sections 8 and 17. Line Subscript Sec. line 2.12 chs.		
	Eas. $1\frac{1}{4}$ Cor. Correct back by running N 131° E		
	Established Center of Section 8 by Staking Stake with		
	Mound of Stone and N.T.S.		
	A for 30' dia. bears N 70 $\frac{1}{4}$ ° W 94 chs. Dial -		
	" 36 " " N 79 $\frac{1}{2}$ ° E 145 " "		
	" " " " " " " "		Eugene Fitzhugh
Survey 43 rd	June 17 th		
	for F. W. Colbrook.		
	From a point 20 chains East of 14 Sec. Cor.		
	to line Between Sect. 29 and 30.		
South	Run South without measuring		
	8000 to a point 20 chs. East of 14 Cor. Bell Secs. 31 and 32		
	Thence East -		
East	Without measuring to a point 40 chs. East of 14 Cor.		
	Between Sect. 31 and 32 and center of Section 33. Point		
	Continue East - Measuring from East corner		
	2000 chains Sect - 14 $\frac{1}{4}$ Cor. from which		
	A for 36 inches in diameter bears N. 18° 46' E. 30 chs. Dial -		
	" 40 " " " S 61° 33' E 27 " "		
	" 40 " " " " S 61° 33' E 27 " "		
	" " " " " " " "		Eugene Fitzhugh Co. Sur.

Record of Survey in Township 31 S. R. 15 W.

Survey No 44

June 27th 1888

For Elizabeth Dodge

Laying out the town of Chauhan

Township 31 South Range 15 West

The Initial Point is located 3 feet East of

the center of Section 15 - Cor. to E. Dodge
Land ClaimMain Base line North L. King stakes at Cor. of L. 15
and Blocks

Along East Boundary of Bayard St. -

200 feet - to South Boundary of 2nd St.60 " Across 2nd St.200 " To South Side of 3rd St.

At 130 feet Willow Cr. 2.5 ft. wide Course N 70° W

From South Side of 2nd and East Side of Bayard

200 " To West Side of Manning St.

From S. Side of Bayard and W. Side of Manning St.

North 60 " Across 2nd St.200 " To South Side of 3rd St.

At 134 ft Willow Cr. S. 70° W.

From South Side of 2nd and W. Side of Manning St.South 200 ft. To North Side of 1st St.From South Side of 2nd and West Side of Manning St.

East 60 " Across Manning St.

From East Side of Manning and South Side of 2nd St.South 200 " To North Side of 1st St.North 60 " Across 2nd St. and E. Side of Manning St.200 " To S. Side of 3rd and to Crute Canal W.N.W. Corner of Block No 12 over Bridge
From S. Side of 2nd and East Side of Manning

East 300 ft. To West Side of Lamar St.

North 60 ft. across 2nd St.

Elizabeth Dodge

County Surveyors Office Denmark Curry Co. Og

Survey No	For	September 7th 1882
Survey No 46	For John Smith and F. Walkers	September 7th 1882
North	From the cor. to Secs 10, 11, 14 & 15 Township 36 South Range 14 West	Run North
West	19.93 chs. To left bank of Roym River course S.W. From same corner Run West	19.90 chs. To Bank of river and thence run
N 44.30° E.	14.16 " line Thence	14.16 " line Thence
S 45° E	14.74 " To Section Cor.	14.74 " To Section Cor.
	The last course run divides Lot No 5 in Sec 10 into equal parts	each part containing 9.98 acres
	George Fitzhugh County Surveyor	
	Survey No 48 Made Sept 8th 1885 for A. M. Gullispie	
North	From 14 Sec. Cor. on line bet Secs 17 & 18 Township 36 S. R. 14 W.	2000 chs. Lot 14 1/4 Sec. bet from which A. Myzite line, one a claim but green tree bears S 53 1/4 W. 131 chs. Dist.
East	Thence East	22.00 " To Sheep Gulch course North
	60.00 " 14 1/4 Sec. Cor. from which A. Myzite 36' in dia. bears	South 75° E 4 chs Dist. Thence North
North	20.00 " To Sec. line E & W bet Sec 18 1/2 from which	A for 14 inches in diameter bears S 85° W. 4 chs. Dist.
	George Fitzhugh Co. Sur.	
	Survey No 47. Sept 9th 1885. for Cash Lockwood	
N 0.22° E	From 14 Sec. Cor. on line bet. Secs 18 & 17. 36 S. R. 14 W.	Run as follows.
West	150 chs A Road N. 20° W.	20.00 " Marked a Markers 28' in dia. for 14 1/4 Sec. Cor. Thence
	2000 ft. In cultivated field, Marked a 5' x 8" dia. for 1/4 Sec. Cor.	

Office of County Surveyor Denmark Cgo.

Survey No 48 Oct 11th 1888 - for

Jefferson Wright

From the N.W. Cor. of Sec. 30 Township 30 S. R 14 W. run East -

Bet. Secs 19 & 30

76.50 chs. Nancy Creek 4 lks. wide course North

4000 " Marked a quarter 4' dia. for 1/4th Sec. Cor. 17th sec.

2000 " dit-stake and run south

4000 " dit stake for South East Cor. of claim

George Fitzhugh Co. Sur.

East

" Cor.

South

Survey No 49. Feb'y 26th 1886 for

Monroe Upton

From Cor. to Secs 2, 3, 10 & 11 run East

Without measuring found the 1/4th Cor. by cross lines

Marked a Fir log lying down and 24" in dia. or less, run N.W.

A Fir 36" in dia. bears S 76° W. 37 lks. dist.

Janice Smith

2000 chs. 1/4th Cor. from which

A Fir 24" in dia. bears S 48° E. 48 chs. dist.

6000 " dit 1/4th Sec' Cor. from which

A Fir 30" in dia. bears N 58° E 67 lks. dist.

South West cor. of M. Upton's claim.

George Fitzhugh

South

" Cor.

Survey No 50 - May 18th 1886 - for

Bagnell & Phelps

From the 1/4 Sec. Cor. Bet- 1 & 6 Township 36 S. 16th E. 17th N.Without chaining along line of Rickett line to Decm 2nd 1884

Established Cor. to fractl. N 68° S E quarter of Sec. 7. 37 lks.

South of a Tobacco colored rock 7 x 8 x 4 feet.

George Fitzhugh

Co. Sur.

West

County Surveyors Office, Denmark Oregon.

Survey No 51. May 19th 1886. for
Wm Miller

From 1/4 Sec. Cor. already established in Sec 17. Township 36 S R
14 West and run a line West without chaining.

George Fitzhugh Co. Sur.

Survey No 52 May 19th 1886 for

Tanber

From 1/4 Sec. Bet. Bet. Secs 9 & 16 from which
A For 30 in dia. S 56 1/2 W. 450 chs. Dist.

" " 40" " S 19 3/4 E 3.68 "

Without chaining to a point - Bet. NE and NW quarters of
Sections 9 Township 36 S. R. 14 West Mill. Mer.

Thence East

12.00 chs. To sign on cr.

2.00 To 1/4 Sec. line dividing NE 1/4 of Sec. 9

Ranged line without measuring -

George Fitzhugh Co. Sur.

Survey No 53. May 20th 1886. for *

Reid Miller

Township 36 S R 14 W.

From the cor. to Sect 1, 2. 35-836 Bet. Townships 35 and 36

South and Range 14 West and run South

800 chs. to Cor. 2 chs. mid course East-

2000 " 1/4 Sec. Thence West-

21.75. A Road NE & SW.

17.00 " Cor. 2 chs. mid course S.E.

27.20 End of Prairie NE & SW.

39.50 " Cor. 2 chs. mid course SW.

44.00 Sect 14 1/4 Cor. from which A For 30 in dia base N 45 W. 3 chs.

George Fitzhugh Co. Sur.

Line Error in Original Survey Causing a Mislay

West

North

East

South

South

"

West

County Surveyors Office, Clatsop Co., Oregon.

Survey No 54. June 26 1886 for

Robert Mc Kenzie

From Cor. to Sec 1. 78 78. 12. 8. 73. Township 32 S. R. 57. S. 16 N.

Huns Coat

Part. Sec 7 & 18. Jan. 19 25' E.

2.02 ch. Bluff bank offset North 100 ch.

550. South 100 ch. regained line

21.71 ch. abate for 1/4 1/4 Sec. Cor.

47.71 Found Red Blotch still standing. Witness tree growing

back to 1/4 1/4 Sec. Cor. 1st Monument. Starts from school

of Jan 12 in. dia. bears North 10 ch. dist.

George Fitzhugh Co. Sur.

Survey No. 1.

Surveyed for Fred Hare, Jerry Huntley, Charles Winsor and Walter Sutton, Dec. 9th 1890

This survey was for the purpose of locating and staking out a lot, sold by Walter Sutton to Fred Hare, Jerry Huntley and Charles Winsor.

Preliminary to commencing this survey, I direct the telescope of my instrument due North by the solar apparatus and find that the needle varies $19^{\circ} 35' E.$ at this place.

I begin at a leaning spruce tree, 10 ins. diameter, which is situated between Jerry Huntley's residence and the Postoffice. Thence run

$N. 46^{\circ} 30' E.$ 2.60 chains distant to the N.E.

corner of Walter Sutton's lot. At this corner I drive an iron pin 12 ins. long into the ground and hang a glass bottle 10 ins in the ground alongside.

Thence run $S 48^{\circ} 30' W.$ 50 feet distant to the S.E. corner of the lot sold by Walter Sutton to Fred Hare, Jerry Huntley and Charles Winsor. At this corner I drive a cedar stake 1 foot long and about $1\frac{1}{2}$ ins square into the ground.

I continue this line $S 48^{\circ} 30' W.$ 50 feet further to the N.W. corner of said lot. At this corner I drive a cedar stake 1 foot long and about $1\frac{1}{2}$ ins. square into the ground.

Thence run $S 48^{\circ} 30' E.$ 100 feet distant to the S.W. corner of said lot. At this place I drive a cedar stake 1 foot long and about $1\frac{1}{2}$ ins. square

T 38 S R 14 W

into the ground.

Thence from N. 48° 30' E. 50 feet distant to the S. E. corner of said lot. At this point of drive a cedar stake 1 foot long and about 1 1/2 in. in diameter into the ground.

Thence from N 48° 30' W. 100 ft. distant to the N. E. corner, the place of beginning, of said lot. Said lot lying in the town of Ellensburg Curry County Oregon, and situated in Lot 3, Sec. 36 T. 36 S. R. 15 W. Will. Mer.

Rolla Campfield
County Surveyor.

Survey No. 2

Surveyed for Theron Crook, December 11th 1890.

This survey was to establish the South hdy. of Sec. 16 T 38 S. R 14 W.

Theron Crook and W. W. Whitton were sworn in as chainmen.

Beginning at the S. W. Cor. of Sec. 16, which point I find by measuring N. 20° W. 35 ft. dist. from a fir 50 in. diam, the Cor. post being washed away,

Thence East on South hdy. of Sec. 16.
Via 190 E.

Across prairie.

12.50 chs. Trail, course N. 21 S.

25.50 " Top of spur, course N. 21 S.

26.00 " Center brush.

40.80 " White fir, a witness tree to the 1/4 Sec. 16 and 21. Sec. 16 and 21.

T 38 S R 14 W.

- This 1/4 Sec. Cor is gone and the field notes furnished from the Surveyor. General's office and to notes of this corner.
- 57.79 " Top of sharp ridge, course N and S. Here a triangular across a steep canyon which is too steep to measure across with the chain.
- 64.90 " P set flag on line on opposite ridge, and measure a base N 93 lks. from which point the flag bears S 82° 33' E, and distance across is tan. 82° 33' x by base = 7.11 chs. and the whole distance from the cor. is 64.90 chs.
- 81.50 " Top of ridge course, N.W. and S.E. intersect a point 50 lks S. of Cor. to Sec. 15, 16, 20 and 21, which is an alder tree 12 in diam with appropriate marks in the bark, and with trees agreeing with field notes of U. S. survey
Rolla Crawford
County Surveyor

Survey No. 3.

Surveyed for Asa Crook December 13th 1890.

This survey was for the purpose of establishing the 14 Sec. cor. bet. Secs. 28 and 33 T. 38 S. R. 14 W. and establishing the 14' 14 Cor. between Will Crook and Joseph Clark, in Sec 28 in the same township.

Thomas Cahill and Theron Crook were sworn in as chainmen.

Beginning at the Cor. to sec. 27, 28, 33 and 34, I offset South 5.28 chs. in order to have frame to measure through, the section running

T 39 S R 14 W

through a dense undergrowth of brush.

Thence from West through prairie

Via 19° E

20.00 ch

Intersect wagon road, course S. E.

39.75 "

To a point on the 1/4 Sec. line in Sec. 33 528 chs.

South of North boundary of said Sec.

Thence from North 5.28 chs. and at this point re-establish the 1/4 Sec. cor. bet. Secs. 28 and 33, by erecting a mound of stone 3 1/2 foot base and 1 1/2 feet high, there being no witness trees convenient, and from which mound,

The top of Arch Rock bears S 53° 20' W

The center of Joseph Closes house bears S 9° 20' E

Thence due North.

Via 19° E

And at 20.00 chs. set a cedar post 3 1/2 ft. long, 3 ino square 12 ino in the ground for 1/4 1/4 cor. from which,

A fir 18 ino. diam. bears S 30° W 60 lks. dist. marked 1/4 1/4 S. B. I.

A fir 30 ino. diam. bears N 49° W. 6 lks. dist. marked 1/4 1/4 S. B. I.

Holla Sanfield

County Surveyor.

Survey No. 4

Surveyed for John Cooley December 22, 1890.

This survey was for the purpose of finding where the 1/4 Sec. line running South through

T. 38 S. R. 14 W.

Sec 3 T. 39 S. R. 14 W. crosses the wagon road
to establish 1/4 Sec. cor. on township line on North
boundary of Sec 3 T. 39 S. R. 14 W.
Thence South without measuring.

Na 19° E.

1/4 Sec. line crosses wagon road in prairie about
20.00 chs. North of Riley Dodge's house.
Drove a fir stake into the ground above the wagon,
where line crosses, and placed a rock over stake.

Rolla Canfield
County Surveyor

Survey No. 5.

Surveyed for Clark and Miss Johnson. December
22d 1890.

This survey was for the purpose of establishing
the Sec. line between Miss Johnson and Mr. Clark
claims, Miss Johnson's claim lying in Sec 34, and
Clark in Sec 33 T. 38 S. R. 14 W.

John and Theron Crook were sworn in as chain-
men.

Commencing at a point 20.00 chs. West and
5.28 chs. South of cor. to Secs. 27, 28, 33 and 34,
which point lies in the wagon ^{road}, running from
Elonahung to Chetee, and which was previously
determined by me in Survey No. 3.
Thence southerly meandering wagon road.

- 1 Na 19° E. distant 4.29 chs.
- 2 S 44° E. " 2.48 "
- 3 N 75 3/4° E. " 1.12 "

4	S 54 $\frac{1}{2}$ ° E	distant	1.30 chs.
5	S 23 $\frac{1}{4}$ ° E	"	3.18 "
6	S 4° W	"	1.76 "
7	S 13 $\frac{1}{2}$ ° E	"	2.15 "
8	S 48° E	"	1.43 "
9	S 36 $\frac{1}{2}$ ° E	"	4.63 "
10	S 49 $\frac{1}{2}$ ° E	"	2.09 "
11	S 48 $\frac{3}{4}$ ° E	"	1.84 "
12	S 42 $\frac{1}{4}$ ° E	"	2.33 "
13	S 20 $\frac{1}{2}$ ° E	"	1.26 "
14	S 42° E	"	1.43 "
15	S 43 $\frac{1}{2}$ ° E	"	1.73 "

to a leaning
 Sargent oak 18 ins diameter
 Thence due West 1.06 chs. to Sec. line, and draw two
 fir stakes 2.00 chs apart on the line.

Rolls banfield
 County Surveyor.

Survey No. 6.

Surveyed for All Gamblotte April 21st 1891.
 Commenced at the 14 Sec. cor. bet. Secs. 7 & 8,
 T. 37 S. R. 14 W., Thence South
 Va. 19° 18' E.

Through opening
 to cane to thick brush.

Descend steep hillside.

Creek 5 ft wide, course S. 2° W.

" 4 " " S. W.

Sec. cor. missing.

Thence to run west,

Va. 19° 18' E.

Marked a white ^{pin 1/4 in diam} 14 1/4 S for a 14/14 cor.

- 5.00 chs
- 11.00
- 26.50
- 35.50
- 40.00
- 20.00

from which,

A white fir 9 ins. diam. bears S. 74° W. 13 rods dist
marked $1/4/1/4$ S. B. 7.

A white fir 10 ins. diam. bears N $70\frac{1}{2}^{\circ}$ E 16 rods dist
marked $1/4/1/4$ S. B. T.

Rolla Canfield
Country Surveyor.

Survey No. 4

Surveyed for Alex. Frank May 7th, 1891.
This survey was for the purpose of marking the
exterior boundaries of Sam Thornstons timber claim
Commenced at the $1/4$ sec. cor. bet. Secs. 20 and 21, T 35 S.
Thence $\$$ run west

Va. $19^{\circ} 28'$ E.

Without chaining, but blaying the line conspicuously
and marked a saigen oak 3 6 ins. diam. with 2 notches
on E. and W. sides, to designate when the line comes to
the river.

Now return to $1/4$ Sec. cor. and run south,

Va $19^{\circ} 28'$ E.

40.00 ch. To cor. to sec. 20 21, 28 and 29. This line is blayed
conspicuously bet. $1/4$ Sec. cor. and Sec. cor.

Thence $\$$ run south

Va. $19^{\circ} 28'$ E.

Ascend mountain slope, through scattering timber

Summit of spur, course N. W. Open timber

Set a cedar post 4 ft. long 4 ins. diam. for a $1/4/1/4$ post
marked $1/4/1/4$ S on N. W. face,

from which,
A saigen oak 9 ins. diam. S 74° E 22 rods dist.

19.00

20.00

marked $1\frac{1}{4}$ S.B.T.

A maple 24 ins. diam. bears S $75\frac{3}{4}^{\circ}$ W. 48 lbs.
disk marked $1\frac{1}{4}$ S.B.T.

Thence W. on N. bdy. of Sam. Thoutens claim
Va. 19° 28' E.

Descending

11.50 chs. Creek 8 lbs. wide course N.W.

20.00 Set an oak post 4 ft. long 4 ins. diam. for a $1\frac{1}{4}$ cor.
marked $1\frac{1}{4}$ S on N.E. face,

A sargen oak 12 ins. diam. bears N $3\frac{1}{4}^{\circ}$ E
43 lbs. disk marked $1\frac{1}{4}$ S.B.T. from which,

A fir 36 ins. diam. bears S 28° W. 56 lbs. disk
marked $1\frac{1}{4}$ S.B.T.

Thence from N.

Va 19° 28' E.

Descend mountain.

17.00 chs. Trail up Roquo river course S.E. and N.W.

17.50 Creek 9 lbs. wide course N.W.

20.00 Sec. line.

Set myrtle post 4 ft. long 4 ins. diam. marked $1\frac{1}{4}$ S
on N.E. face. for $1\frac{1}{4}$ Sec. cor.

from which.

A white cedar bears N $31\frac{1}{4}^{\circ}$ E. 40 lbs. disk marked
 $1\frac{1}{4}$ S.B.T.

A sargen oak 14 ins. diam. bears S. $9\frac{1}{2}^{\circ}$ E. 17 lbs. disk
marked $1\frac{1}{4}$ S.B.T.

Thence west without measuring

Va 20° E.

Blazing line conspicuous by, to Roquo river

Rolla Canfield,
County surveyor.

Survey No. 8.

Surveyed for Geo Southard May 20th 1891.
 Survey was for the purpose of marking the east half of
 Geo Southards claim.
 Reestablished 14 Sec. cor. bet. Secs. 2 and 35 on township
 line, bet. No. 35 and 36 S. Range 13 W. (see County Surveyors
 Record of Bearing Trees of U. S. Survey, page 5)
 From which 14 Sec. cor. ϕ run south without measuring
 to $19^{\circ} 30' E$.

Blazing the line conspicuously to the N. bank of Roquo
 river

ϕ now return to 14 Sec. cor. Themo N.

Via. $19^{\circ} 30' E$.

A creek 6 ft. wide, course S. W.

Ascend.

Sled road, course S. W.

Trail, course N. W. and S. E.

Saw trail course N. E. and S. W.

Summit of spur, course S. E.

Marked a sargen oak 18 ins. diam. on S. W. side
 14/14 S for 14/14 cor.

A pi 24 ins diam. bears $S 9\frac{1}{2}^{\circ} E$ 27 ft. dist. marked
 14/14 S. B. T. from which,

A sargen oak 10 ins. diam. bears $S 85\frac{1}{2}^{\circ} W$
 44 ft. dist. marked 14/14 S. B. T.

Rolls banfield
 County surveyor.

Survey No. 9

Surveyed for William Miller May 19th 1891.
Commenced at $\frac{1}{4}$ Sec. cor. bet. Secs. 28 and 33 T.

35 S. R. 13 W, thence west,
Va. 19° 30' E.

Through prairie

1.48 lbs. Thence, course N 8 S, and enter field.
10.50 across field, and cross fence, course N W $\frac{1}{4}$ S E.

20.00 Set temporary $\frac{1}{4}$ corner.

24.00 Enter timber and descend.

37.50 Trail, course N 8 S, newly made.

40.38 Enter sec. Sec. line 65 ft. north of Sec. cor.

Thence 89° 4' E, on a true line bet. Secs 28 and 33.
Va. 19° 30' E.

20.19

Set a fir stake 3 $\frac{1}{2}$ ft. long 3 in. diam marked $\frac{1}{4}$ S
for a $\frac{1}{4}$ cor.

There being no witness trees near, raised a mound of
earth around post.

From the above $\frac{1}{4}$ cor. to run N.

Va. 19° 30' E

Ascend through prairie.

Enter brush.

across brush and enter prairie.

20.00 Draw a fir stake in the ground at cor.

Thence S 89° 4' W

Va 19° 30' E.

Enter timber, and descend.

17.75 Newly made trail, course N 8 S.

20.00 Cross the wide course S.

20.19 Draw a stake in the ground at cor.

Thence N, retracing Sec. line,

4.00 Va. 19° 30' E.
Up the bed of the creek.
Leave creek and ascend steep hill.
21.30 Intersect a point 12 lks. W. of 1/4 sec. cor. lat. Secs 29 & 28.
Thence W.
10.75 Va. 19° 30' E.
Creek 4 lks. wide, course S.
19.75 " " S. E.
20.00 Set a fir stake 3 ft. long 4 ins. square 18 ins. in the ground
marked 1/4 1/4 S for 1/4 1/4 cor. from which
A maple 12 ins. diam. bears N 81° W 24 lks. dist.,
marked 1/4 1/4 S B.T.
A sargen oak 24 ins. diam. bears S 41° E 39 lks. dist.,
marked 1/4 1/4 S B.T.

May 19th 1891

From the cor. to sees 28, 29, 32nd & 33, to run S.

Va. 19° 30' E

Second

Newly made trail, course S 20° W.

5.90 Set an oak stake 2 1/2 ft. long 5 ins. square 12 ins in
20.00 the ground marked 1/4 1/4 S for 1/4 1/4 cor. from which.

A red fir 60 ins. diam. bears W. 10 lks. dist. marked
1/4 1/4 S B.T.

Thence W

Va. 19° 30' E

Newly made trail course S

Crossed creek 4 lks wide course S.

Ascend steep mountain.

Summit of spur, course S. E.

13.75 Set a fir stake 2 1/2 ft. long 4 ins. square 18 ins in the
20.00 ground for 1/4 1/4 cor. marked 1/4 1/4 S, from which
A red fir 48 ins. diam. bears E. 24 lks. dist.

marked $1\frac{1}{4}$ S B T

Thence S. without measuring

Va $19^{\circ} 30' E$.

Descend, and along the line, conspicuously to the N. bank of Progers river.

May 20th 1891

Rolla Casfield
County Surveyor.

Survey No. 10

Surveyed for John Hise May 20th 1891

Commenced at the cor. to Secs. 28, 29, 32 and 33

T. 35 S R. 13 W.

Thence W

Va. $19^{\circ} 30' E$.

Creek $4\frac{1}{2}$ lks wide, course S.

Set temporary $1\frac{1}{4}$ S. sec. cor.

Intersect a point 82 lks. north of $1\frac{1}{4}$ S. sec. cor. bet Secs. 29 and 32.

Thence $N 88^{\circ} 49' E$ on a true line bet S sec 29 and 32.

Va $19^{\circ} 30' E$

Set a fir post 3 ft long 5 ins. square 18 ins. in the ground marked $1\frac{1}{4}$ S for $1\frac{1}{4}$ cor. from which a sargent oak 10 ins. diam. bears $N 1\frac{1}{2}^{\circ} W$ 19 lks. dist. marked $1\frac{1}{4}$ S B T.

A fir 50 ins. diam bears $S 74^{\circ} W$ 22 lks. dist. marked $1\frac{1}{4}$ S. B. T.

Thence N

Va $19^{\circ} 30' E$

And mountain

Set an oak post 4 ft long 4 ins. square 18 ins. in the ground marked $1\frac{1}{4}$ S for a $1\frac{1}{4}$ cor.

20.00

.50 cor.

20.00

41.46

20.73

- from which
A madsans 20 ins. diam. bears N 58° E 25 lbs dist
marked 1/4 1/4 S B T
-
- Now return to 1/4 Sec. cor. bet. Secs. 29 and 32,
Thence S
Va 19° 30' E
Decend.
Creek 3 lbs. wide, course S, comes from the N E; but
follows creek 4 chs. Then creek flows S 40° E
Set a fir stake 3 ft long 4 ins square 18 ins into ground
marked 1/4 1/4 S, for 1/4 1/4 cor., from which
A red fir 36 ins. diam. bears S 69° W 35 lbs dist.
marked 1/4 1/4 S B T
- May 20th 1891.
-
- Now return to 1/4 Sec. cor. bet. Secs 29 and 32
Thence N.
Va 19° 30' E
Ascend mountain
Enter prairie, course N. E. and S. W.
Set a fir post 2 1/2 ft. long 5 ins square 12 ins in the
ground, marked 1/4 1/4 S, for 1/4 1/4 cor. from which
A red fir 18 ins diam. bears S 23 3/4° E 14 lbs dist.
marked 1/4 1/4 S B T
This 1/4 1/4 Cor stands on the S. face of Lobster hill
in the prairie.
-
- Now return to 1/4 1/4 cor., 20 chs. S. of 1/4 Sec. cor
bet. Secs 29 and 32
Thence W.
Va 19° 30' E
Creek 4 lbs wide, course S.

9.00

20.00

18.50

20.00

5.50

20.00	Marked a red fir tree 5 ins diam. $1/4$ $1/4$ S for a $1/4$ $1/4$ cor, from which A sargen oak 13 ins diam bears $N 82^{\circ} E$ 21 $1/2$ ds. marked $1/4$ $1/4$ S B.T. Alder 10 ins diam bears $N 29^{\circ} W$ 19 $1/2$ ds. Marked $1/4$ $1/4$ S B.T. Thence S without measuring. Va $19^{\circ} 30' E$ To the N. bank of Rogue river, consequently blazing the line May 21 st 1891 Rolls-Campfield County Surveyor
1.00	Survey No. 11. Surveyed for John and Isaac Miller Aug 20 th 1891 To establish the N and S line through the center of Sec 36 T 35 S. R. 14 W. termined at the N. Sec. cor. on the township line on the south side of Sec. 36, thence N $18^{\circ} E$.
2.50	Va. $19^{\circ} 23' E$.
5.60	Sled road, course S. E. and N. W. Ascend hill.
7.00	Trail, course SW. and N. E.
7.50	" "
15.50	Top of ascent.
20.00	Trail course N. W. and S. E. Set temporary $1/4$ $1/4$ cor.
30.00	Sled road course N. E. and S. W.
64.40	Creek 4 $1/2$ ds wide, course S. E.
79.00	" 2 "
80.73	Intersect Sec. line 1 ch. W. of $1/4$ Sec. cor.

Thence S. 19° W on a true line through section 36.
 Va. 19° 23' E
 Set a 1/4 1/4 cor. from which
 A sargen oak 7 ins diam. bears N 41° E 7 1/2 dist.
 marked 1/4 1/4 S. B. T.
 Said 1/4 1/4 cor. is a sargen oak stump 5 ins diam.
 August 20th 1891.
 Rolla Gauffield
 County Surveyor.

Survey No 12.

T. 36 S. R. 14 W.
 Surveyed for Henry Rusher Nov. 9th 1891.
 Commencing at the Cor. to secs. 11, 12, 13 and 14, Thence
 East bet. Secs 12nd and 13.

Va. 19° E

Ascend mountain.

Summit of ridge.

to the N. E. Cor. of Rusher's claim.

Thence S. without measuring

Va 19° E.

To the Louis-Cay prairie.

Now return to the cor. to secs. 11, 12, 13 and 14

Thence W. bet. Secs 11nd and 14.

Va 19° E.

Through heavy brush.

To N. W. Cor. of Rusher's claim.

Thence S. on the west bdy. of Rusher's claim,
 without measuring, to opening W. of Rusher's house.
 Nov 9th 1891.

Rolla Gauffield.
 County Surveyor.

50.54

17.00

20.00

20.00

Survey No. 13.

Surveyed for Elain Miller Nov. 10th 1891.
Commenced at 1/4 Sec. Cor. on the township line on S. half
of Sec 35 T. 35 S. R. 14 W. Thence North, 14' E

Va. 19° 15' E

Set fir peg
Thence W. through prairie.

Va 19° 15' E

Summit of ridge course N 42 S.

" "

From here go to the 1/4 Sec Cor. bet Secs 34 and 35 Thence
N 17' E

Va. 19° 15' E

To north half of Elain Miller's place.

Nov. 10th 1891.

Rolla Barfield
County Surveyor.

Survey No 14.

T. 35 S. R. 14 W.

Surveyed for George W. Miller Nov. 11th 1891.

Established 1/4 1/4 Cor. 20 chs. E of Cor. to Secs. 21, 22, 27 and
28, from which,

A fir 24 in. diam. bears N 89 1/2° E 56 lks. dist. marked

1/4 1/4 S. B. T.

Thence S

Va 19° 30' E

20.00 ^{chs} Drove a stake in the ground

28.00 Road, course N 65° W

32.00 Creek 10 lks wide, course N. W.

Nov. 11th 1891

Rolla Barfield
County Surveyor

Survey No. 15

T. 35 S. R. 14 W.

Surveyed for George B. Miller Nov. 11th 1891.
Commenced at $\frac{1}{4}$ Sec. Cor. bet. Secs. 21 and 28, Thence
N.

Va 19° 20' E

Creek 10 lks wide, course N 15° E, and along
west side of Geo. B. Miller's field.
Cedar Fork creek 12 lks wide, course N. W.
Creek 6 lks wide, course W.
Cedar Fork Creek 15 lks wide, course N 10° E.
Dress a few stalks 4 ins. square 4 ft long 2 feet in the ground.

Nov. 11th 1891.

Rolla Banfield
County Surveyor.

18.50

36.00

37.50

39.50

40.00

Survey No. 16.

Surveyed for Phil Hulbert Nov. 13th 1891.

Commenced at $\frac{1}{4}$ Sec. Cor. bet. Secs 11 and 12. T. 35 S. R.
14 W, thence S 88° 38' W

Va. 19° E

Set Temporary $\frac{1}{4}$ cor.Intersect Sec. line 70 lks. south of $\frac{1}{4}$ Sec. Cor.

Thence S 89° 8' E on a true line through sec. 11.

Nov. 13th 1891.

Rolla Banfield
County Surveyor.

40.00

49.25

Survey No. 17.

T. 41 S. R. 13 W.

Surveyed for Hams and Duly Dec. 5th 1891.
Commenced at the Meander Cor., bet. Secs. 6 and 8 on

to left bank of Chetco river and found the distance
across Chetco river to be by triangulation 13.21 chs.
Thence W. lat. Secs 5 and 8.

Va. 19° 30' E

Thence N. and S. and thence through field.

Thence N. and S. and through DeLays field.

Thence N 55° W and enter lane.

Left lane and crossed fence N 55° W

Thence N and S. and left field.

Came to Cor. of Secs 5, 6, 7 and 8

Thence W. 15.00 chs

thence 5.50 chs. south.

Thence N. 14.00 chs and set fir post 4 in square
are in the ground for. N. W. Cor. of Henes claim.

Thence E. 10 chs and drove a fir post 4 in square
in the ground for corner.

Thence N 5 chs. and set a fir post 4 in square
for cor.

Thence E. 10 chs, and at

cross road course N 10° W

Set a post 4 in. square for cor.

Thence S. 10. chs. and at

Road N 70° W

Drove a fir stake 4 in square 2 feet in the ground.

Thence east

Va 19° 30' E

Road N 70° W.

Set Redwood stake 4 in. square 24 in. in the ground
for cor stake.

Thence N.

Va 19° 30' E

Came to fence point Dulys crossed fence line

2.00

E 2d W.
 Cross fence E and W. and leave Sulys orchard
 Enter brush E. 2d W.
 Creek 4 lks, wide, course N. E.
 Set cedar stake 4 ins diameter for cor.
 Thence E.
 Va 19° 30' E
 Enter brush and descend.
 Come to flat
 Come to edge of water of Cheto river and set a
 cedar stake 5 ins diam. 24 ins in the ground marked
 D. G. from which
 An alder 10 ins diam. bears S 81° W 19 lks dist marked
 D. G. B. T.
 An alder 8 ins diam bears N 49 1/2° W 33 lks dist.
 marked D. G. B. T.
 Dec. 5th 1891
 Rolla Garfield.
 County Surveyor

Survey No 18.

Surveyed for James and John White Jan. 16th
 1892.
 Commenced at the 1/4 Sec. cor. on south half of
 Sec. 24 T. 41 S. R. 17 W. thence
 N. to establish the dividing line bet. the E. and W. half
 of said sec., on a random line.
 Va 19° 30' E
 Ascend Mountain, open country.
 Cross picked fence, course N 10° E and S 10° W.
 Wagon road "
 Cross fence course S 80° E and N 80° W

33.05
 36.50
 40.00
 50.00

12.00
 17.00
 25.36

The bank of Cheto river has
 been washed away down the or
 ignal survey.

7.75
 4.89
 14.50

- 20.00 Set temporary 1/4 1/4 cor.
 27.17 Crossed fence, course S 80° E 2/3 N 80° W.
 40.00 Set temporary 1/4 Sec. cor.
 48.83 Creek 9 lks wide, course S 45° E.
 60.00 Set temporary 1/4 1/4 cor.
 80.81 Intersect sec. line 31 lks. east of 1/4 Sec. Cor.
 Thence S. 13° E on a new line
 Va. 19° 30' E
 20.08 Set a redwood stake 4 ins. square. 2 ft in the ground for
 1/4 1/4 Cor. ^{of same which, an alder 1 1/2 ins. diam. bears N 71 1/2° E / 17.2 lks dist,} marked 1/4 1/4 S. B.T.
 40.16 Set a redwood stake 4 ins. square 2 1/4 ins in the ground
 marked 1/4 S. for 1/4 Sec. Cor. from which,
 An alder 18 ins. diam bears N 72 1/2° W 91 lks dist.
 Marked 1/4 S. B.T.
 A fir 20 ins. diam. bears S. 41 1/2° W 226 lks dist,
 marked 1/4 S. B. T.
 Now return to 1/4 Sec. Cor. on N. hdy of sec. 24
 Thence W.
 Va. 19° 30' E
 Ascend mountain.
 3.50 Set temporary 1/4 1/4 cor.
 20.00 No sec. cor. visible
 40.00 Intersect sec. line 6 lks south of cor. to sec. 13/14,
 43.46 25 2/3 24
 21.73 Thence S 89° 55' E on a new line
 Set a fir stake 4 ins. square 2 1/4 ins. in the ground
 marked 1/4 1/4 S. for 1/4 1/4 Cor. from which
 A red fir 20 ins. diam. bears. S 62 1/2° E 21 lks dist
 marked 1/4 1/4 S. B.T.
 A red fir 28 ins. diam. bears N 8 1/2° W 30 lks dist
 marked 1/4 1/4 S. B.T.
 Now go to 1/4 Sec. Cor. on W. hdy of sec. 24

- 24, Thence east on a random line,
Va. 19° 30' E.
Creek 5 lks, wide flows S.
Set temporary 1/4 1/4 Cor.
Cross fence, course N and S.
In two or middle line through sec. 24 85 lks N. of
1/4 Sec. Cor. in center of sec.
Thence N 88° 48' W on a true line
Va. 19° 30' E
Set 1/4 1/4 Cor, a redwood stake 4 ins. square 24 ins in
the ground marked 1/4 1/4 S, with a mound around
stake 18 ins. high and 2 ft base, and one butt 12 ins
square and 18 ins deep 5 ft. north of stake and a
similar pin N east of the stake 5 ft.
- Thence N. 2° 22' W. on a true line bet. John and
James White.
Va. 19° 30' E.
Crossed fence, course E 94° W.
Set a redwood stake 4 ins. square 24 ins. in the ground
marked 1/4 1/4 S for 1/4 1/4 Cor, from which,
A dead red fir 15 ins. diam. bears N. 38° W 40 lks dist.
marked 1/4 1/4 S. B. T.
A sargen oak 8 ins. diam. bears S 24° W 170 etc
dist. marked 1/4 1/4 S. B. T.
- Now return to 1/4 Sec. Cor. on death hdy of Sec.
24, thence east on a random line
Va. 19° 30' E.
Enter brush
To north bank of Wispuck creek
To E. bank of Wispuck and ascend mountain.
Creek 4 lks wide, course N 45° W.
Set temporary 1/4 1/4 Cor.

10.25

20.00

20.90

40.17

20.08

8.15

20.20

7.50

10.53

12.80

18.00

20.00

32.65

break 2 lks. wide, course $N75^{\circ}W$
 Intersect township line 1.80 lks. north of the S. E.
 Cor. of Sec. 24.

38.73

Thence $N87^{\circ}24'W$, on a true line
 Va $19^{\circ}30'E$

19.36

Set a fir stake 4 ins diam. 24 ins. in the ground
 marked $1/4 1/4 S$ for $1/4 1/4$ Cor., from which,
 A dead spruce tree 45 ins. diam. bears $N60^{\circ}E$
 65 lks. dist. marked $1/4 1/4 S.B.T.$

Thence S. without measuring, to the balsam's line.
 Va. $19^{\circ}30'E$.

January 16th 1892.

Rolla Garfield
 County Surveyor.

Survey No 19.

Surveyed for Cather Jan. 18th 1892.
 Commenced at the cor. to Seco 4, 5, 8 and 9 T. 4 S.

R 12 W.

Thence S.

Va $19^{\circ}E$

Cross creek, 4 lks wide, course S. W.

Set a $1/4 1/4$ Cor., from which

A red fir 40 ins. diam. bears $S86^{\circ}W$
 40 lks. dist. marked $1/4 1/4 S.B.T.$

Thence W.

Va $19^{\circ}E$

Creek 5 lks wide, course S. W.

Road, course $N30^{\circ}W$ and $S30^{\circ}E$.

Set $1/4 1/4$ Cor., from which,

A myrtle 12 ins. diam. bears $S75^{\circ}E$

87 lks. dist. marked $1/4 1/4 S.B.T.$

Jan. 18th 1892

8.60

20.00

12.10

18.75

20.00

Rolls-Carfield
County Surveyor.

Survey No. 20.

Surveyed for Blate and Nelson Jan 1904 1892
Commenced at the cor. to Secs. 9, 10, 15 ^{Q. 16} T. 41 S.
(R. 13 W.
Thence east,

Va. 19° 20' E

Creek 4 lks wide, course S.

Then course N 30° W ^{Q. 1} S 30° E

Road "

Summit of spur S. W.

Creek 3 lks wide flows S. W.

Set a mound of stone for 1/4 Sec. cor.

Thence N.

Va. 19° 20' E

Summit of ridge, course N 25° W ^{Q. 1} S 29° E

Intersect 1/4 Sec. cor. an N. bdy of Sec. 10.

Reestablished said 1/4 Sec. cor.

Thence N.

Va 19° 20' E

Set 1/4 Sec. cor. in center of Sec. 3, from which,

A fir 14 ins diam. bears S 44° E W 32 lks dist.

marked 1/4 S. B. T.

An oak 18 ins diam. bears S 82° E 68 lks dist.

marked 1/4 S. B. T.

Thence E

Va 19° 20' E

Set a 1/4 1/4 cor. No. witness trees.

Jan 1904 1892

Rolls-Carfield
County Surveyor.

20.00

9.75 ^{cha}

16.86

17.00

25.00

29.00

40.00

58.50

82.99

40.00

Survey No. 21.

Surveyed for Crook and Ormank Jan. 23^d 1892
 Reestablished the cor. to Secs. 20, 21, 28 and 29 T.

38 S. R. 14 W.

Thence S.

Va 190^t

Creek 3 lks wide, course N. W.

Set 1/4 1/4 cor. from which,

An older 6 in drain, bears S. 30 3/4° W 59 lks dist.
 marked 1/4 1/4 S. B. T.

Jan. 23^d 1892.

Rolla Canfield

County Surveyor.

50

20.00

Survey No. 22.

Surveyed for Wm. Rumbley April 10th 1892.
 Commenced at 14 Sec Cor. bet. Secs. 9th and 16th T. 36 S

R. 14 W Thence

West

Va. 19° 15' E.

Creek 4 lks wide, course S.

Brow of hill slopes N. W. 2^d S. E.Thence N 25° W. 2^d S. 25° E.

Set temporary 1/4 1/4 cor.

Creek 4 lks wide, course S. and enters field.

Intersect Sec line 18 lks. N. of Cor. to Secs 14, 15,
 & 16.

Thence N 89° 44' E on a true line bet. Secs 9 & 16.

Va 19° 15' E.

And drive pegs on the two lines, and at
 drive a cedar stake for 1/4 1/4 cor.

20.10 do

April 15th 1892

Rolla Canfield

County Surveyor.

Survey No. 23. April 25th
 Surveyed for Will Cooley
 1892. Donation claim.
 Commenced at the cor. to Secs. 4, 5, 8 & 9 T.
 41 S. R. 13 W., Thence S.
 Va 19° 16' E.
 14.53 chs. Thence N 65° E and S 65° W
 14.86 Wagon road N 65° E and S 65° W.
 16.00 " " " "
 16.75 Gulch 6 lks wide, course S 65° W
 26.30 " " " "
 28.76 Set Temporary stake on N. ldy of Donator's claim.
 31.50 Wagon Road course E rd S 50° W.
 31.90 Thence N 70° E and S 70° W and enter Well known field.
 56.65 Came 23 lks. E. of Meander cor. to N. fractional
 Secs. 8 and 9.
 21.24 Thence N 16° E from Meander cor. on a true
 line bet Secs 8 and 9.
 56.65 Draw a stake at the intersection of the Donator
 boundary on the N.
 Come to cor. to Secs. 4, 5, 8 & 9.
 April 25th 1892
 Now go to S. E. cor of the ~~Meander~~ ^{Christian} Galtt Donation
 claim, and then to run W. without measuring,
 Va 19° 16' E.
 And intersect Sec. line 18 lks N. of where
 it intersects N. ldy of Donator's claim
 Thence N 89° 52' E. on a true line on the N. ldy
 of the ~~former~~ ^{former} Galtt Donation claim.
 Set a stake on line and near the N. E. cor. of
 the ~~former~~ ^{former} Galtt Donation claim
 Now return to where the Sec. line bet 8 and 9

intersects the Donation line, there from

S 89° 52' W

Va 19° 16' E

to offset 7 1/2 k S. of true line to get a clear view.

Offset 7 1/2 k N. and get on true line again.

Cross 8 1/2 k wide course S.W.

To edge of bank.

Cross 8 1/2 k wide course N.W.

To N.W. Cor. of Donation claim.

2.00

3.00

8.75

8.90

15.90

This survey was made to establish the
N. bdy. of the James W Osgood Donation claim.
Holla Kaufe's
County Surveyor.

Township 30 S. Range 14 W.

No. 151 For James Coulter

Begin at the N.E. cor. on the W. bay of Section 30.

1/2 sec. 30 thence East

1 50 To Arroyo Creek, thence West

3 50 " Opposite bank Creek 50 lks wide

13 00 ascending, thence N.W. Enter a clearing

20 50 Mrs. Martin's house, thence N. 50 lks. dist: picket

at 19.35 chs. Enter garden.

23 50 Picket fence, leave garden

28 25 Small stream, thence S.

24 00 Gate of fence N.W.


40 00 N.E. corner of Sec. 30. Cor

60 00 " " 1/4 Sec. "

77 50 To a point from which find the curve that intersects the E. bay of Sec. 30. 186 lks South of the N.E. cor.

The true line will bear S 88° 40' 30" W

T. 30 S. R. 14 W.

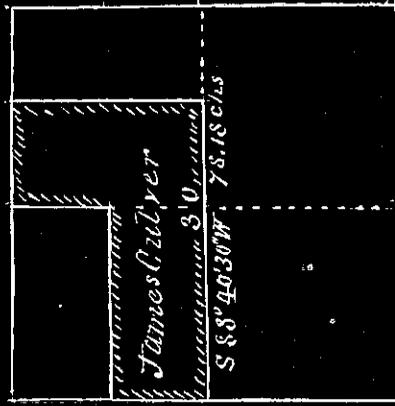

Surveyed as deputy under N. J. Canfield, Co. Surveyor

January 18, 1892

Recorded June 30th 1893
J. J. Fox, Deputy
County Surveyor

Co. Township 34 S. R. 14 W. Sec. 31

No. 152. Alexander Frank

Land bought from Mrs. Colburn.

Beginning at a point at the foot of the bluff at ordinary high water mark on the shore of the Pacific ocean in front Sec. 31, and immediately N. of the promontory known as the 3 Sisters, and from which the Southern extremity of a rock about 40' long & 15' high bears West 45° N. Eastern end of same rock bears N. 77° W. Thence running

2.50 chs. To a stake

7.18 " To a stake on the Summit of the rock connecting 3 Sisters to the mainland.

44.00 " Along shore to a stake opposite the Southern extremity of a large Point west of the line

39.15 " Set a stake in front of N.E. cor.

17.70 " To a stake on the ridge connecting Sisters & mainland.

6.18 "

2.50 "

0.57 "

To place of beginning.

Containing 35 acres.

Unofficial Survey by John Fitzhugh 1890

Recorded Jan'y 30, 1893

J. D. P. Fitzhugh
County Surveyor

Sec. 31, T 34 S. R. 14 W.

No. 153. Alexander Frank.
2^d Tract purchased from Mrs. Colbrook

Beginning at a point 57 link East of
 the upstream N.W. cor. of the first tract as re-
 corded on page 140. Thence

- S 130°
- S 38° E
- East
- N 11° 25' W
- N 64° 15' W
- N 70° 45' W

- 2.50 chs
- 6.18 "
- 6.38 "
- 8.08 "
- 7.00 "
- 3.95 "

To place of beginning (4.72 acres)
 Unofficial Survey by John Fitzhugh March 26, 1890
 Recorded Jan. 31st 1893
 John Fitzhugh
 C. Surveyor.

No. 154. 3^d tract bought from Mrs.
Mary Colbrook by Alex. Frank

Begin at the N.E. cor. of the first
 tract purchased as recorded on page
 140 town-state standing in prairie
 Thence as follows
 6.50 chs. Small gulch. Find 100-cks bore
 8.20 " Small stream; runs into pond
 16.80 " State. Enter brush
 20.50 " Set a stake. Cross stream at 19.00 chs

- N 113° E
- "
- "
- "
- "

Thence _____
 3.50 chs To Cor. Willow 4th di. N. 6 chs dist
 Point of rock 3' long 1 ch. W. of Stake
 This cor. is by a creek running North
 (Continued on next page)

S 273° E

Subs. 31 Town. 34 South Range 14 West.

No 1524 Frank Calbrook Contained.

149th

15.60 chs. To E. bay of first tract
As recorded on page 140.
State and mound of stone.

17th

28.56 chs. To place of beginning 18.96 across
Surveyed May 6th 1893
Record Sept. 29 1893
J. Van Highough
Co. Surveyor.

Township 34 N. Range 14 W

No. 155- Linville of Anderson


Began at the cor. to Sect. 6. 6. 7. 8
(Mound in corner of Linville) Thence
Along left bank of a creek; tributary of Bush Cr.
S. 100 E. 60. Thence Bush Cr. 600 yds. to
55.00 " Cross Creek; hence
110.56 " To 1/4 Sec. Cor. in town Sec 37 C

No. 156

"
"
"

West

Thence N. N. bay of Linville
0.75 chs. Crossed bay of Bush Cr. Linville.
20.10 " To 1/4 Sec. Cor. of Unincorporated L.
This stake is 20 chs. S. of 1/4 Sec. Cr.
21.00 " Bush Cr. hence Montrose bay
40.00 " Set temporary post for N.W. cor.
of Linville's Homestead
Jan'y 29 1891

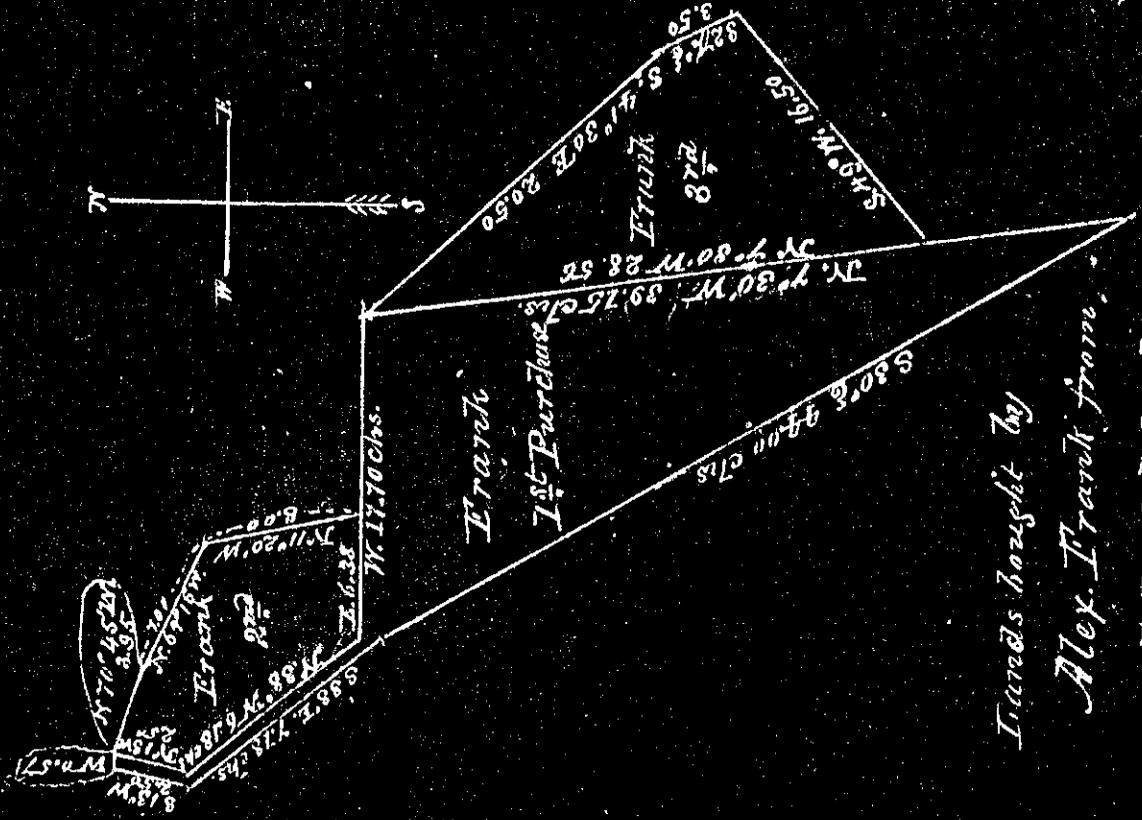

Tracts bought by
 Alex. Frank from
 Mrs. Colebrook.



Township 34 S. Range 14 W.

No. 155 Anderson & Simville - continued

Ag

Again begin at cor. of 5.6, 7.8

On S. bay of Clearville's Monestee

1.00 ch Cross County Road. Bushy, timber

40.00 " To 1/4 Sec. cor. between 6 & 7 Simville

SW. cor. The line is between Simville

& David B. Cary.

Re-established the corner from which

A magnet bears S 48° E 5 1/2 chs dist.

" " " S 60° W 11 " "

Cor to - set

Fence north between Simville & Cary

Ascending steep brushy hill

10.00 chs. Small Stream. Course West

29.00 " " " " "

40.64 " " " " " " " " " " "

West of Temp. post set corner Stake

Spinas Oak 14" di. S 56° E 6.3 chs dist

For Chas. Anderson's S. bay. begin

against the cor. of 5. 6. 7. 8.

On S. bay of Chas. Anderson's claim.

20.00 chs. Set 1/4 Sec. cor. from which

Measure 9" di. bears N 28° 5' W 11.0 chs dist.

On Anderson's S bay -

26.00 chs. Small Stream. Course NW.

27.50 " Summit of hill

60.00 " Set 1/4 Sec. cor. N. E. cor. of Claim

Gate marked 1/4 1/4 S. Mt. 1 inch

South of Cor. Stake

Jan'y 28. 1891

West

"

"

North

"

"

"

East

"

North

"

"

"

Townships 27 N of Range 145 W

North	No. 155 contains <u>Chas. Anderson</u> On N. bay of Anderson's Claim, 12.00 chs. <u>Stream. Runo L.E.</u> 60.00 " Set 1/4 Sec. cor. for Anderson's N.W. Cor. from which and Oak 11" diam. bears S 58° E. 53 chs. dist. Thence
South	On W. bay of Anderson's Claim 18.50 chs. Cross Bush Cr. Course S.W., 20.17 " Intersect Linnville's N. bay at SW cor. of Anderson's L. and 27 chs. W. of the temporary post Set a stake for Cor. from which A Maple 24" dia. is N 16° E 57 chs. Surveyed by John Fitzhugh, deputy under J. G. Campbell to Surveyor J. McCreary Sept. 29, 1893. By John Fitzhugh - County Surveyor
	At Port Oxford on the front -
N 10° E	No. 156. For Mrs. Geo. Dart. To locate The Warehouse, wharf and other prominent objects. Begin at the SW. cor. of The Fisher Donation Claim as identified by corner monument (Section of gas pipe). Thence
East	4.50 chs. To N.W. cor. of Crawford's land's tract Thence
"	2.00 chs. Cross the railroad 2.40 " " " Wagon road (Continued page 145)

Port Deford Frontage Continued

No. 150 Continued Mrs. Geo. Deot.
 Subsect Crawford's N. bay 506 links East
 of Crawford's N.W. Cor. 7 set a post and a line
 an iron bar 56 lbs. West of the intersection
 of Crawford's line with the meander line.
 (Note - 75 lbs. from the Warhouse the
 wharf rests on a large rock. Jan. 10, 1893
 Reconnue Sept. 29, 1890
 John - J. J. - Hugh - Co. Surveyors.

Township 30 S. Range 15 W.

No. 157, Frank McMillan on

Began at the 1/4 Sec. Cor. at Center of
 Sec. 36

----- Thence West on maximum

County Road. Dairyville to Col. line E & W

Crust runs W. Down a slope and encumproth

Enter timber from woods -

Subsect - N. bay of Sec. 36 20 W. & E. of 1/4 Sec. Cor

----- Thence S 15° E

From the 1/4 Sec. Cor. N. bay of Sec. 36

2 1/4 Sec. Cor. Center of Sec. 36 -

----- Thence East on maximum

On N. bay of Sec. 36

Subsect Township's line 18 W. & N. of N.E

Cor. of Sec. 36. And set a line of stakes

back. Course back N. 89° 48' W.

(A line of stakes set at every 5 chains

on W. 1/4 bay of McMillan's land)

North
 Chs. 45

20 30

39 73

S. 15° E

39 73

East

40 36

Township 30 S R. 15 W

No. 157 Continued. Frank McMillan Sr.

To find Frank McMillan Sr. S.E. Cor

Run North from a measure corner on
The County Road
To a temporary cor. of Frank McMillan Sr. S.E. cor
Thence continue N. down hill, bearing first line
from Frank McMillan's S.E. N.E. cor.


Stream Course NW. Meet Jan. 24, 1893

Set a temporary post 1/4 cor.
Thence West

38 00 Run to Creek. Course NW.
40 00 Set a temporary post for intersection E. bay of Sec 36
North Thence North

7 00 Creek, Course East
12 00 To a point Thence 157 W to the N.E. Cor (20 chains)
of Sec 36. Thence slope a line South
to the intersection.

(Second post) Jan'y 25, 1893
Record kept Sept. 29th 1893
John Fitzhugh P. Surveyor.

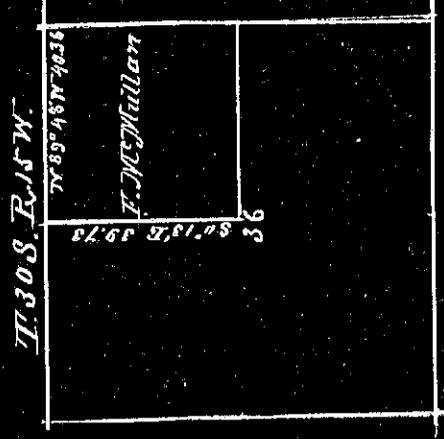

D. H. S. R. 14. M.


Chain No	Apr. 15. 88	For H. Neely ^{64. 4. 88} Begin at the N.E. Cor. of Sec. 32 Same State Thence West - on N. line of Sec. 32
9 50	Small stream. Course N. 80° W.	
24 50	S. fork of Laurel Creek runs N 60° W	
34 00	Commence ^{of a spur slopes N.W.}	
38 00	Small stream. Course nearly North	
40 00	Find out trace of 1/4 Sec. cor. Set a stake. 1/4 A myrtle 8" dia. bears S 60° W 52 chs.	
	" " " " S 70° W 61 "	
	Thence North on Neely's E. line.	
4 00	Stream Course N. 40° W.	
23 30	Foot of Mease Cr. Course N. 30° W.	
40 00	Set a post for Neely's N.E. cor. 1/4 A myrtle 10" dia. bears S 87° E 38 chs.	
	Thence West on N. line of Neely's Pre-empted	
8 50	Descending to Mineral Cr. Runs N. 25° W.	
19 00	Ridge or Spur, Slopes N.	
20 00	Neely's N.W. cor. Set a post from which A white fir 18" dia. bears S 63° E. 95 chs. dist. Sept 19, 1892	
	Begin again at the N.E. cor. of Sec. 32	
	Thence S. on Neely's E. line.	
14 00	Small stream. Course N. 45° W.	
39 96	To a point 48 chs. N. of the 1/4 Sec. cor. as restored by R. J. Canfield County Surveyor - The true bearing of the line is S 41° E.	
	Thence West from the 1/4 Sec. cor. on the S. line of Neely's Homestead -	
40 00	Descending. Set a 1/4 Sec. cor. stake. No trees handy to mark. Neely's home bears N. 50° E. 175 chs.	
45 52	Small stream runs S.W.	

Chas. D. R. H. W.

Chas' 46 - No. 158 Continnua - ~~1890~~
 58 75 Public Road N. 30° E. x 500 W.
 60 00 Set a 1/4 Sec. Cor. post for Neely's SW. Cor. N
 Apr 14th di. bears N. 60° E. 55 Chs. dist.

 Thence N. on N. bay. of Neely's Preemption
 and E. bay. of Mrs. Colbrooks land.
 5 50 Public Road N. 20° W. x 200 E. Enter prairie
 7 00 - do - N. 10° E. x 10 W.
 10 50 - do - N. 13° W. 150 E. Sept 21st 1893
 15 50 Enter timber E. & W. Asend hie N. 20 W x 200 E
 67 25 Colbrooks timber road. N. 6. x E. W.
 79 71 Intersect the N. bay. of Preemptions at the stake
 September 22nd, 1893.

Record Sept, 24, 1893.
 John Fitzhugh
 County Surveyor.

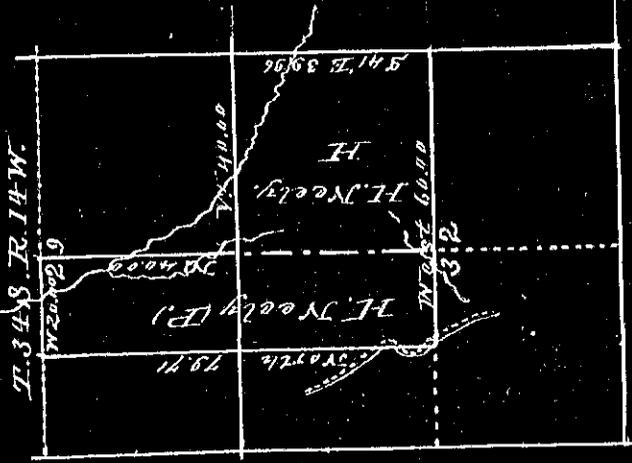

Sept. 29, 1893 -
 John Fitzhugh
 Co. Surveyor

754 S. W. 14th of Murray & G. N. Curry

Chains etc

No. 157. G. M. Curry. 3/4 Sec of Sec. 17, T. 17 N. of R. 14 of Sec. 35

Begin at the S.W. cor. of Sec. 35 S.W. 1/4 of Township

Thence East on Sp. line

4 50 Summit of a Spur, Slopes S.W.

18 50 Small Streams, Course S.E.

20 00 To a point 30 Ets. from Euche Co. bottom

Set a 1/4 Sec. Cor. for G. M. Curry's 1/4 Sec. 17

A maple stump 20' or less from the above East 27 Ets.

" " " " " " N. 64 E. 61 Ets. east.

Thence North on G. M. Curry's 1/4 Sec.

Ascending

15 00 To high oak flats, then very hilly on sloping E.

29 00 Brook or gulch bears East.

40 00 G. M. Curry's 1/4 Sec. Set 1/4 Sec. Stake from which

A pine 36" or less N. 8 E. 19 Ets. east.

Thence East on N. bay of G. M. Curry's claim.

20 00 Down hill to a point about 130 Ets. from Euche Co.

and S.W. cor. of G. M. Curry's claim. Set a

1/4 Sec. cor. post - from which

A maple 16' or less S. 75 W. E. 30 Ets.

Thence North on G. M. Curry's 1/4 Sec.

15 00 Point on Newberry road line Top of hill Sept. 16, 1892

17 00 Foot of hill of Euche Co. bottom

32 00 To foot of hill again. down bottom begin to ascend the S. Coffin.

39 82 To 1/4 Sec. Cor. N. bay of Sec. 35

57 82 G. M. Curry's 1/4 Sec. Cor. Set 1/4 Sec. Cor. from which

An oak 6" or less N. 87 W. 58 Ets.

Continued on page 157.

133 of R. 1114.

No. 160. Nordborg & Glasse. Aug 11, 1894.

Begin at the corner to Spr 238348

R. 1491574

Thence West 9 meters & follows same North Cr.

Bearings	Chains	Bearings	Chains
West	1.38	N 25° W	1.00
N 61° W	2.35	N 17° W	1.50
N 7° W	3.60	N 10 1/2° E	1.50
N 52° W	1.60	N 41 1/4° E	1.70
N 22° W	4.55	N 26 1/2° E	1.50
N 26 3/4° W	3.04	N 26° E	1.00
N 22° W	2.96	N 28 1/2° W	2.50
N 80 1/2° W	1.97	N 40° W	1.53
N 1 1/2° W	2.94	N 31° W	1.55
N 18° W	2.68	N 21 3/4° W	1.70
N 42° W	1.44	North	1.37
N 75° W	2.00	N 75° E	2.18
N 72° W	1.04	East	16.75
N 26° W	1.53	South	40.01

End of Measured
To 1/4 Sec. Cor. of line.
To place of beginning.

May 12, 1894

Recorded July 16, 1894
John Fitzhugh,
County Surveyor

J. H. S. R. 1874.

No 16 Will Cooley - To find and relocate
Claim No. The N.E. Corner of the Saggart Section Cl.
No. 40.

Began at the S.E. cor. of Cl. No. 110
offset 25 chs. E. thence North,

31 74 To a point 33 chs. E. of N.E. cor. of Cl. No. 40 as
ascertained. Set a new corner post from which

A Chain 94 is laid. N 89° 50' W. 18.40. etc. True bearing of line No. 110.

June 28, 1894.

To divide Claim No. 40 into equal N.E. &
halves by Government Survey would begin at
point - 16.87 chs. from the S.E. cor. Thence
West to the corner.

By this Survey the starting point of the
survey line will fall 17 chs. N. of the S.E.
cor. Thence West to the corner.

North between Sections 9 & 10 from the mean cor.

10 42 Picket fence E. & W.

10 50 Set a temporary post

20 50 Thence 12 chs. N. Offset 4 chs. E.

Thence the cor. of Secs. 11, 5, 579 and
run from it South, dropping the N. line.

15 50 To bank of camp gulch set a flag on the
S. side bearing S. 12° 15' E. Run right
angle base 57 chs. - opposite angle 10° 42'

Distances 2.65 chs. + 15.50 = 18.15

18 15 To opposite bank.

24 00 To bank of camp. Cairn

29 10 To opposite Sec. 249 chs. E. of line = 25.50 chs.
run from the S. This was done to verify the

N.E. cor. of Claim No.

June 30th 1894

John Fitzhugh & Surveyor.

J. H. D. R. 1376

Chains The No. 162. Tract sold to Riley Cooley by
 Mill Cooley.
 Begins at the N.E. cor. of Ch. 40
 Thence West
 N. 13 50 To post number P.S. Thence South
 S. 8 00 " " " " East
 E. 3 50 " " " " South
 S. 6 78 " " " " East
 E. 10 00 " " " " North
 N. 14 78 Place of beginning. Contains 17.53 acres
 Curry County, Oregon. June 30, 1894
 John Fitzhugh,
 County Surveyor.

No. 163. Tract sold to Mill Cooley by Riley
 Cooley.
 Begins at the S.W. Cor. of Chain 40
 Thence as follows; -
 N. 25° 14' E. 5.30 chs. - N. 23° 14' E. 4.17 chs.
 - N. 49° 14' E. 3.00 chs. - N. 17° 14' E. 6.68 chs.
 - East - 13.91 chs. - South 17.00 chs.
 - West 5.84 chs. to nearest post between
 sections 8 & 9 - East 2.77 chs. - South
 4.80 to the dividing line.
 Curry County, Oregon. June 30, 1894
 John Fitzhugh,
 County Surveyor.

T. 30 S. R. 15 W. Goodwings & Harbours.

Chains	No. 164	To Sulina Sec. 26. From the S.E. cor. of Sec. 26 - N. on S. bay of the Section.
20	21	To a $\frac{1}{4}$ $\frac{1}{4}$ cor post temporary (formerly set)
25	00	Creek 8 Ets. and across N.W. County road N.T.S.
30	20	To a point 3 Ets. S. of $\frac{1}{4}$ Sec. Cor.
40	24	Thence North on a meadow.
9	00	Set a heavy post. Jan. 15, 1895.
14	25	Morton Creek, Course N.W. Enter prairie at at 12 Ets.
40	00	Set a temporary $\frac{1}{4}$ Sec. Cor.
40	75	Angle bears N. 70° W.
42	50	Cor. of Goodwings fence. Offset 20 Ets. N.
47	50	Enter for timber. Dummy bushy. June 16, 1895
78	80	Intersect N. bay of Sec. 26, 90 Ets N. of $\frac{1}{4}$ Sec. Cor.
<p>From the $\frac{1}{4}$ Sec. Cor. on the N. bay of Sec. 26. S 85° 50' E. towards a flag at the $\frac{1}{4}$ Sec. Cor. on E. bay of Sec. 26 without chaining, and intersect the N.T.S. dividing line 62 Ets S. of the temporary post, and measure 460 Ets East and set $\frac{1}{4}$ Sec. Cor. at this intersection A line for 50" air bears S 22° 20' E. 80 Ets. A line for 36" " " S 71° W 230 Ets.</p>		
<p>Thence East Chaining Public road N.T.S. enter timber. Temporary $\frac{1}{4}$ $\frac{1}{4}$ Sec. Cor. 41 18 To $\frac{1}{4}$ Sec. Cor. Then go back to Temp post and measure it to center, 20.57 Chs and from center. A for bay 18" air bears S. 62° 15' E. 50 Ets. A for stump 30" " " N 12° 15' E. 25 " Thence S. 1° W. on line dividing S.E. $\frac{1}{4}$ of 26</p>		

T. 20 S. R. 16 W. Granting of Humboldt.

(164 Continued)

Cherry Sts.

S. 1° W. on line dividing E. 1/4 of Sec. 26 -

40 14 To a point 54 sps. E. of the true N. 1/4 Sec. cor. from which

Abercrombie 80" air. bears S. 86° W. 127 fks.

Air Stump 18" " " S. 68° E. 51 "

Thence N. 1° 46' E.

20 07 Set 1/4 Sec. cor. from which

Air 6" air. bears N. 88° E. 20 fks.

Maple 8" " " S. 28° E. 21 "

Thence the 1/4 Sec. cor. on S. 1/2 cor.,

of Sec. 26 - N. 1° 20' E.


14 25 Newtons Crk 40 fks. wide from the E. corner NW.

19 69 Set a 1/4 Sec. cor. from which

A sample 24 ins. air. bears S. 65° 30' W. 205 fks.

The parties interested consented it unnecessary to run the E. 1/4 line across the S. 1/4 of the Section.

W. J. B. R. 15 W.

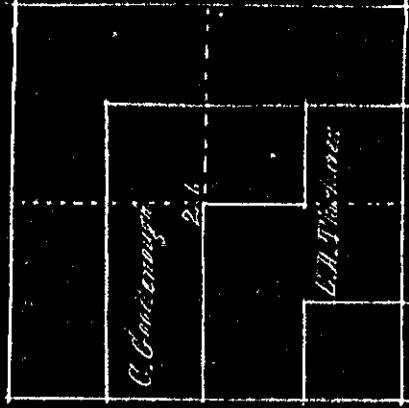

Curry County, Oregon.

Jan. 15, 1898

John D. Hughes,
County Surveyor.

T. & S. P. 57th. P. H. Healy.

165. To restore some of the corners.
 Line 27
 Begin at a temporary post set arbitrarily near the S.W. cor of Sec. 27; thence North on N. line of section -
 Wagon road E. & W.
 25 30 Begin to ascend a steep hill following a fence
 14 32 Keller's joining fence E. & W. Foot of hill E. & W.
 17 50 Keller's fence bears West 150 chs.
 20 00 Enter Keller's Garden
 22 00 Clear gardens
 40 00 Set a temporary 1/4 Sec. post.
 70 25 Left bank of Elk river, runs N. 65° W.
 76 00 Opposite bank. Leave the river.
 78 40 Intersect N. line of Sec. 27, 69 chs. E. of Cor
 to Sec. 21, 22, 27 & 28 -
 Restore the corner by running S. 57° W.
 59 chs. from an arch 12° ai. and setting a new section corner, from which a new
 artificial tree built; and arch 18° ai. bears
 N. 65° 45' W. 118 chs. Thence
 South on the N. line of Sec. 27.
 79 21 Set a 1/4 Sec. Cor. on the bay of Sec. 27 from which } (This was done after
 An arch 18° ai. bears S. 79° 20' E. 77 chs. and } running 1/4 S. bay of 27)
 78 42 To a point 69 chs. W. of the temporary starting point.
 of ... found to be on the true S. line of
 the section.
 From the S.E. cor. of Sec. 27 a
 distance from the witness tree - N. 84° 30' W.
 19 50 Stream; 4 chs. wide course N.
 38 21 Stream " " " "
 47 00 Creek runs N.E. foot of hill.
 57 00 Cross wagon road S.E. & W.

July 26, 1896

L. S. R. 15th (County Sec. 27)

Chain	No 165 - (Continued)
68	Waym Road S.E. & E.
79	to the temporary post -
79	Intersect the N. bay of the Section and set a post for the S.W. Cor. of Sec. 27 from which
	A Clear Stamp bears N 85° 30' E 100 Mts.
	A pair 10" diam. " S 66° 15' N 168 "
	Small Clear tree " N 55° 30' N 108 "
	Back to center of S bay, transit 39.94 chs.
	and set a 1/4 Sec. post from which
	An <u>oak</u> 10" diam. bears S 29° 10' W 194 chs.
	North between Sections 26 & 27.
780	District lines S & W. Set a line stake
1100	down a bank. Sand bar, set a line stake, over gravel bar to the river. July 21 st 1896
	Curry County, Oregon. John Fitzhugh,
	County Surveyor.

No. 166 Fort Orford.

Survey made to establish, mark and record the West side of Jackson Street from 6th Street to Block 127 between 15th & 16th Streets.

Notes of monuments on the base line, which runs E. & W. in the center of 6th Street. At the N. edge of Jefferson St. the line is marked by a piece of black gas pipe, as in 1878.

The junction of the Base with the N. bay of Jackson is marked by an iron bolt. The center of 6th and Jackson St. is marked by inch gas pipe 16" long.

Port Orford (Continued)

No. 166 Continues

The S.E. cor. of BK 46 is 2 1/2" S and 3" N. of the S.E. Corner of the Blacklock Store.

From the S.E. cor. of BK 46 by offset from the center of the Street,

277' To N.E. cor. of B. 46. Drive inch gas pipe 2' long B. 46 88 57

" 80' across 7th St. to S.E. cor. of B. 57. wooden peg.

" 200' To N.E. cor. of B. 57 " "

" 80' across 8th St. to S.E. cor. of B. 66. wooden peg

{ East 80' Drive inch gas pipe 2' long at S.W.

{ cor. of B. 67 (Nelsons BK.) B 66 86 7

" 200' To N.E. cor. of BK 66. Drive gas pipe 2' long 1" di.

{ East 80' Drive inch pipe 20" long at N.W.

{ cor. of B. 67 (Nelsons BK.) B 71

" 80' across 9th St. to S.E. cor. of B. 71. Drive 3/8" iron pipe.

This is Nelsons S.E. cor.

{ West 300' to S.W. cor. of B. 71. Gas pipe 20" long. B 71

{ North 100' to Nelsons preliminary cor. from lot 2 } return.

long. 7/8" East from lot 1

{ North 100' to dimaling's N.W. cor. from lot 4 long 3/4" di.

{ East 90' " cor. of lot - from lot 4. 7 Continues

" 120' + 90' = 210' to dimaling's S.E. cor.

Drive 3/4" inch rod 6' long.

{ North 100' to dimaling's N.E. cor. from lot 1/2 di. 4 long.

" N.E. cor. of B. 71. Iron pipe 2' long Nyeppen's N.E. cor. B 71

" 80' Crossing 10th St. to S.E. cor. of B. 86. No stake set

" 200' To N.E. cor. of BK 86 - No stake set - B 86

" 200' To S.E. cor. of BK 91. Set a wooden stake. B. 91

" 200' To S.E. " " 102. Set a wooden stake

Witness. A cross on a cedar stamp 30" diam.

marked B. 102 bears S 5° 10' W. 20' dist.

" 200' To S.E. cor. of BK 107 - wooden stake. B 107

Witness - A cross on a Cedar Stamp 40" di. bears

S 65° 7' W. 14' 11" marked B 107 (Continues on page 160)

Witness to N.E. cor. of 102
Cross on Cedar Stamp 24" di.
Marked 102 bears N 35° 15' E 43' 8"

Township R. 13 T. 7 N

(167)

Chains Allen & Fish, same location.
 Begin at the 1/4 Sec. cor. on the N. W. bay. of Sec. 6 - Thence East to oak timber
 12 00 Enter prairie } Bob Allen's Claim
 15 00 Range Mt } W. 1/4 of Sec. 6
 15 50 Fence N.W. corner field } Fish's Claim
 20 50 " " " } Site of Mt. H. Mt. of
 22 50 Offset 100 chs. N. to pass a better N.E. Mt. Mt. of Sec. 6
 24 00 " " " of same set a stone for the
 Sec. cor. from which
 An oak 18" dia. bears N. 64° E. 30 chs.
 July 15, 1895 John Fitzhugh,
 County Surveyor.

(168) P. C. Shalbert - Claims Site of N.W. 1/4
 & N. 1/2 of SW 1/4 of Sec. 26. T. 25 S. R. 27 W
 Begin at the 1/4 Sec. cor. on the N. W. bay. of Sec. 26 Thence ~~East~~ South
 13 50 Crute runs West
 21 00 Set a 1/4 Sec. cor. Shalbert's Mt. cor. from which
 A fir 115" dia. bears N. 6° E. 9 chs.
 Cedar 125" " " N. 75° W. 37 "
 Thence East, ascending.
 9 40 Picket fence N.E. & S.W.
 10 15 " " " Mr. & A.E.
 40 00 Set a 1/4 Sec. cor. Shalbert's S.E. cor. from which
 A fir 50" dia. bears S 11° E 35-40 chs.
 " 60" " " N 64° W 49 "
 Thence North, ascending
 2 50 Summit of ridge. E & W.
 30 00 Stream runs N. 10° E.
 40 00 Set a 1/4 Sec. cor. Shalbert's N.E. cor. from which
 A fir 40" dia. bears N. 64° W. 50 chs.
 " 60 " " " N 23° E 71 chs.

Level R.H.W.

(168) continued

Chains

Thence West

40 00 to a maple tree 10' diam. marked for 1/4 Sec.
Sec. Cor. E.M. Curry's S.E. Cor of Hall's
N.W. Cor. July 16, 1895

John F. Light Co. Surveyor

(169) D. J. S. O. C. 11/14/96

Chas. Neumann

Begin at the 1/4 Sec. Cor. on the N. Corp. of
Sec. 35 Thence N. ascending 20° Slope
Set a 1/4 Sec. Cor. Neumann's N.W. Cor from which
A mag. the stamp 18" di. bears N 80° E 7' 60".

" " 16' " N 20° W 11 "

Thence East, ascending

60 Section N.E. of S.W.

11 30 Spur Slopes S.W.

8 70 Stream runs S.

18 00 Spur Slopes S.

22 00 Stream runs S.

28 00 Spur Slopes S.

35 00 Creek runs S.

42 30 Intersect line between Secs. 28 & 36

50 Spur Slopes S.

63 23 Set a 1/4 Sec. Cor. Neumann's N.E. Cor. from which

A fir 18" di. bears S 86° E. 43' 00".

Bark 15" " " S 34° W 34' "

Curry County, Oregon, July 17, 1895

John F. Light Co. Surveyor

J. F. Wakarusa R. 14th

- 11
 of Sec. 10. J. F. Wakarusa, Wp. of N.E. 1/4 Sec. 10 of 1/4 Sec. 10
 Reestablish the N.W. cor. of Section 10 by
 running N. 88° E. 55 chs. from a white fir 50' diam. by
 and setting a new post properly marked from which
 a white fir 15 in. diam. bears N. 8° 30' W. 19 chs. and
 " " 30 " " S 88° W 55 "
 These are the only witness trees remaining and
 all other trees convenient to mark. Witness trees & blazed marks
 Chs. 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50
 Witness East on a sandstone Co. 19° 12' E
 descending in all directions at all firs.
 10 50 Dry gulch runs S. Ascend
 12 50 Spur slopes S. about 4 chs. to bottom
 13 50 Gulch runs South. Ascend
 22 50 Foot of hill descending E. 20'
 27 50 Foot of hill. Eaten changing
 28 50 Wagon road N.W.
 34 50 Eucher Creek 100 chs. wide runs S. 25° W.
 39 86 3/4 Sec. Cor. N.E. established by running S 30° W from one
 witness tree and setting a post from which
 A maple 10 in. diam. bears N 88° E 24 chs. (Old tree marker runs)
 " 36 " " S. 81° E 78 " (Old tree marker runs)
 19 93 19 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150
 Witness West on true line S. by of Sec. 10
 Set a 1/4 Sec. Cor. N.W. cor. of Wakarusa and from which
 A Kumbok 14 in. diam. bears N. 10° W. 53 chs.
 " for 50 in. diam. bears S 33° 30' E. 91 "
 17 00 17 00 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50
 Witness South between the lands of Wakarusa & Num.
 Foot of hill wagon road E. W.
 10 00 N.W. cor. of Wakarusa bears S 90° E 57 chs.
 Dwelling house bears S. E. 3 chs.
 17 00 To Pt. Ch. of Eucher Cr. runs N. Set a witness post marker
 N.P. from which a maple marker N.P. W. 1/2 Sec. East of the
 Carry Co. Oregon Sept. 14/1898. John J. F. Wakarusa
 Co. Surveyor.

Sept. 28, 1895.

No. 171	Chris Bersagon. N.E. 1/4 of SW 1/4 + and S.E. 1/4 of SW 1/4 of Sec. 28	E 1/2 of NW 1/4 of Sec. 26
Chas. Ber.	Begin at the 1/4 Sec. Cor. 20 chs. N. of the 1/4 Sec. cor. on the N. bay. of Sec. 25.	
5 50	Fence West ascending Va. 19° 10' E.	
20 00	Gulch between lanes S. ascend Set 1/4 Sec. cor marked C.B. 1/4 S. fence which A distance 20 in. diam. bears N 56° E. 9 chs. marked C.B. 1/4 S.E.	
53 00	Back to first beginning point. Thence North ascending Summit of ridge N.E. 10th descend steep hill.	
60 00	Entered N. bay. of Sec. 26. Found no trace of 1/4 Sec. Cor.	
80 00	Mark an oak 10 in. diam. for 1/4 Sec. Cor. (Temp) marked 1/4 S. on N.E. of C.B. 1/4 S. on SW face, and from which A distance 12 in. diam. bears S 82° 30' W 29 chs. Heavy oak and few timber.	
	Curry County, Oregon. Sept. 28, 1895. John Fitzhugh, County Surveyor.	

No 172	Dietrich Shillen. S 24° E. N. 14 W.	
2 00	Begin at the 1/4 Sec. Cor. 20 chs. N. 72° 20' E. of the SW. cor of Sec. 25. Descending gradually. Va. 19° 10' E. & running East.	
35 00	Spur strikes S. { Description as corrected - & SW 1/4 of N.E. 1/4 of Sec. 25 - E 1/2 of SW 1/4. W.M. = p 28. 75	
40 00	Gulch runs S.E. around. Set a 1/4 Sec. post from which An other 19 in. diam. bears N. 28° E. 10 chs.	
15 45	" Oak 8 " " S 82° 30' W. 11 "	
20 00	Fence North ascending Private road N.E. 1/4 Sec. To a point 5 chs. N. of private road. Set a 1/4 Sec. cor. post fence which. An oak 15 in. diam. bears S 29° W 27 chs	
	A for 50 " " N 29° W 15 "	
	Sept. 28, 1895. (Continued on page 169)	

T 34 S. R. 17 W

20 72	Continued — Deitch Duller
Chs 20	Back to start from Tee beginning point (to N. 7 20 Chs. E. of M. Cor. of Sec. 25) Thence North
20 20	Set a 1/4 Sec. Cor. post from which A for 30 in. diam. bears N. 64° 06'. 52 E. thence East ascending gradually.
20 00	Set a 1/4 Sec. Cor. post from which A for 20 in. diam. bears S. 2° E. 23' Ws. An oak 8 " " N. 66° E. 21 "
20 00	Thence North nearly level Set a 1/4 Sec. Cor. post from which A Cedar 6 in. diam. bears N. 66° W 10' Ws.
	All of Duller's place heavily timbered with fir, oak and mesquite and dense undergrowth. Curry County Oregon, Sept. 29, 1895 John H. Hughes County Surveyor.
North	City of Port Orford, Oregon
Foot	Survey of some blocks for Patrick Hughes. From the N.E. Cor. of 10K. 127 260' to the S.E. Cor. of 10K. 143 being the S.E. corner of Pat. Hughes' property. Marked by and iron bolt and witness by a yellow 10 in. diam. loging N. 86° 57' W. 26' 9" east. Thence West 200' to the S.W. corner of the same block.
West	To S.W. Cor. of 10K. 143. Marked by wooden stake; thence
"	Over Washington St. to S.E. Cor. of 144 " " "
"	To S.W. Cor. of 13 144 " " "
"	Across Dickson Avenue to S.E. Cor. of 146 " " "
"	To S.W. Cor. of 13K. 145 " " "
North	Thence North from S.E. Cor. of 10K. 143. East line of property
"	To N.E. Cor. of 10K. 143. Marked by a wooden stake
"	Over 15th St. to S.E. Cor. of 158 " " "

In Re: The Estate of (Continued) Patrick Hughes.

North 20'	1713	To N.E. Cor. of Bk. 158 marked by a wooden stake	States
"	"	80' across 19 th St. to S.E. Cor. of Bk. 163. Center of wagon road. no mark	no mark
"	"	To N.E. Cor. of Bk. 163 marked by a wooden stake	States
"	"	80' across 20 th St. to S.E. Cor. of Bk. 178	"
"	"	200' N.E. Cor. of Bk. 178	"
West		Thence West on N. bay of Hughes' property	" an iron bolt & wooden stake
"		From N.E. Cor. of Bk. 178. Iron bolt & wooden stake	States
"	300'	To NW. Cor. of Bk. 178, marked by wooden stake	States
"	80'	" " " 177	"
"	90'	" " " 177	"
"	120'	Across Dickson's claims to N.E. Cor. of Bk. 176 - Horseshoe	States
"	90'	To NW. Cor. of Bk. 176, marked by iron bolt & wooden stake	States

Curry County, Oregon, Oct. 15, 1895.
John Fitzhugh, County Surveyor

North 20'	1714	To S. R. 157 th N. Holton, Wilson & Clauson	23
"	"	To establish the West half of the line between Secs. 25 & 26	(A. J. Wilson's claim N. 1/4 of N. 1/4, S. E. 1/4 of N. 1/4 of Sec. 25)
"	"	Begin at the Cor. 5 dees. 23. 24. 25 & 26	
"	"	Thence East on a random. N. bay of Sec. 26 N. bay of Sec. 25	
"	"	South thence N.E.	
"	"	Set a temporary post	
"	"	" " " "	
"	"	" " " "	
"	"	To a point 63 th N. S. of the 1/4 Sec. Cor. 25	
"	"	Thence S 89° 6' W on a true line N. bay of Sec. 26	
"	"	Set a permanent iron post	
"	"	" " " "	
"	"	" " " "	
"	"	To the corner 5 Sections 23. 24. 25 & 26.	
"	"	As established the 1/4 Sec. Cor. by running N 32. 6 from a fir	
"	"	stump, and setting a post from which a chain 50 in. diam	
"	"	cross N 10° E 100 yds. Run out. For stump brass 182° W 260 yds. out	
"	"	Curry Co., Oregon. Oct. 14, 1895	<i>John Fitzhugh, Surveyor</i>

J. S. S. R. 15th N. 9th E. 1876

1876

Frank Taylor,

Reestablish the cor. to Sec. 34 & 35 - 20th } R 15th
 7 . 273 20th }

by setting a post 3x4 inches properly marked from where
 the post following witness trees agreeing with U.S. field notes

A fir 12 in. diam (now 20") bears S 37 1/2° E 267 lks dist

Chains

" " 40 " " " N. 75° E 273 "

The other witnesses are gone & no others handy to mark.

Thence East Va. 19° 17' E.

To W. bdy. of wagon road. Thence meaning County road

S 35° E. 2.95-chains; thence

South 3.39 " "

S 30° E. 3.03 " "

S 29° 1/2. 1.91 " "

S 14° N. 3.03 " "

S 48 1/2° W. 3.65 " "

S 4 1/2° E. .63 " To corner of lot

Curry County, Oregon. Oct. 12, 1896

John H. Hight, County Surveyor.

1876

J. S. S. R. 15th N. Mr. Stinson.

Restore the 1/4 Sec. cor. post on the line between Secs 37 & 38

by running reverse bearing from a fir 20 in. diam & iden-
 tified as a witness tree, and setting a post 4 in square
 marked post on N. face, and from which

same fir 20 in. diam. bears S 61° E 85 lks. according to

U.S. map of 8. " " S 60° N 22 lks. U.S. field notes

Thence N 89° 19' E Va. 19° 16' E.

Descending to foot of hill S 70° 1/4° N 47° 30'. Enter brushy bottom.

5-75 Crk. runs N.W.

10. 90 To Stinson's private road.

Thence following the road with a

transverse line.

T. S. R. P. 1874

No. 176

Continued

Mr. Linsam -

Francis Notes.

N. 65° E. 4.00 chains; thence

East 2.50 "

N. 64½ E. 2.00 "

N. 57° E. 3.40 "

N. 56° E. 1.70 "

N. 49½ E. 2.00 "

N. 85° E. 1.70 "

N. 53½ E. 1.50 "

N. 38° E. 1.00 "

N. 67° E. 1.50 "

S. 81° E. 4.00 "

N. 62° E. 3.00 "

N. 53½ E. 2.00 " To a point near Linsam's gate.

By calculating latitudes & departures find amount run

10.70 chs. South and 2.79 chs. East to reach the Section corner

Chs. 46 to Secs. 2, 3, 10 & 11. Thence to fence. The corner, run South

3 00 clear Salween brush bottom. Begin to ascend

5 00 Summit of Spruce, descend

8 00 Gulch runs N. 30° W. ascend

11 20 To a point on line between Secs. 3 & 10

Thence East

3 00 To corner to Secs. 2, 3, 10 & 11. Restored by running N 45° E 11 chs.

From a vine maple 6 in. diam & 11 chs. dist., and Stake post for

Cor. to Secs. 2, 3, 10 & 11 marked $\frac{1}{2}$ S. 33° E. N 157° W. Sec. 2, 3, 10 & 11

From the post thus restored the only witness remains

and from which the post was restored bears, true.

Vine maple 6 in. diam, bears S 40° W 11 chs. dist.

New Stake, Vine maple 3 in. diam " S 24° W. 4 "

No other trees in the vicinity available to mark.

Oct. 21st 1896

(Continued on page 170.)

Jan 30 S. R. 1874

Notes

Stinson Contirmed

To determine the area of Stinson's bottom land.

Began at a point 11.20 chs N. and 2.80 chs W. of the corner to Sec. 2. S. 10. 7. 11 - Hence

East 2.58 chains, thence

- N. 62 1/4 E. 1.82 "
- N. 56 E. 7.00 "
- N. 37 E. 11.00 "
- N. 25 E. 14.50 "
- N. 86 E. 7.50 "
- N. 86 E. 4.00 "
- S. 81 E. 3.00 "

End of Survey. From this point a bottom 50 Ws. wide bears S 86 E on N.E. Side.

Curry County, Oregon Oct. 22, 1896
John Fitzhugh, County Surveyor.

No. 178

Survey for Lib. Mearns & 40 acre lot in Sec. 34 T. 31 S. R. 127 N.

Begin at the 1/4 Sec. Cor. on the S. by.

Chs. 31 Thence

East on Runway across the section, first setting the corner by diting and making a mark and marking the Runway trees which are as follows:

A for 20 m. Runway bears S 85 E 11 chs. 1/2

M. for 20 " " N 32 W 12 "

and Runway Runway bears N 30 E

To Godfrey Creek 45 Ws. wide Runway Runway,

Fence N.E. 1/4 W.

Set Runway 1/4 Sec. post 12 chs W. of corner

Enter clearing West corner

Set Runway 1/4 Sec. Cor.

- 3 50
- 9 20
- 34 00
- 40 00
- 50 00
- 60 44

J. S. J.

Chs	Zhs	
		North Random Curvature
6 00		Same Crnk Course & M.
7 00		Foot of hill N.E. F.M.
15 00		Summit of Spar Slaves M.
40 00		Set a temporary 1/4 Sec. Cor.
81 76		Intersect - N. by. of Sec. 31 98 Mos E. of Sec. cor. True course of line 116 N. 0° 42' W.
		The temporary 1/4 Sec. cor. post - moves 29 1/2 ft. on W. of Crnk. 1/4 Sec. post on 0° 40' line and 25' 1/2 of 1/4 Sec. post (temp) on N 78° line. Set a temporary post at this point for Curvature corner to this 1/4 Sec. of Sec. 31 from which
		A white oak 14" cu. bears N 8° W 116 Mos.
		" " " " 6' " " N 16° E 118 "

Set a white oak post 50 ft. S. of the middle Cor. on the bay. of the E 1/4 of Sec. 31 which is in the middle of the Curvature post.

A cedar 20" cu. bears N 79° W 116 "

At same point dividing the Sec. 31

Down end of Crnk

To a point on N. bank of Crnk

Godfrey - Crnk 30 Mos. wide runs S 77°

Black Crnk 25 Mos. wide, runs west

Set a temporary 1/4 Sec. Cor.

Summit of ridge S. N. Co.

Intersect S. bay. of Sec. 31 20' S. of post and 17 Mos.

Sp of true corner. Set a permanent post 19 Mos.

Crnk. post 20 1/4 Sec. Cor. from which

A white oak 14" cu. bears N 16° E 116 "

A fir 24" " " S 74° W 116 "


(True bearing of line S 0° 14' E)

J. W. R. 12 M.

Chs.	26	Cost on a Random dividing S.E. 1/4 of Sec. 31
	20 50	From a point 24 chs. N. 87 1/2 chs. N. of temp. 1/4 1/4 Sec. 31
	2 50	Summit of prairie ridge N. of steep descent.
	9 00	Enter timber N.W.
	20 00	Goodly Oak runs S.
	40 36	Set a temp. 1/4 1/4 Sec. 31
		Enter at E. bay. of S.E. 1/4 of Sec. 31 214 chs. S. of temp. post.
		Prarie Camp post 102 chs. S. & 11 1/2 chs. E. for point from which
		A cross 16" di. bears S. 74° E. 46 chs.
		" " " " 46 1/2 chs. 42 "
		This bearing of line N. 88° 20' E.

The temporary 1/4 1/4 Sec. post at center of Sec. 31
of Sec. 31 bears 10 chs. N. 87 1/2 chs. E. a white post
Set a prairie camp from which
A white fir 24" in diam. N. 87° E. 16 chs.
" Cedar " " S. 86° 1/2 W. 38
" " " " S. 86° 1/2 W. 38
March 21 1898

Old Haines - W 1/2 of SE 1/4 & SE 1/4 of SE 1/4 of Sec. 31
T. 31 S. R. 12 W.

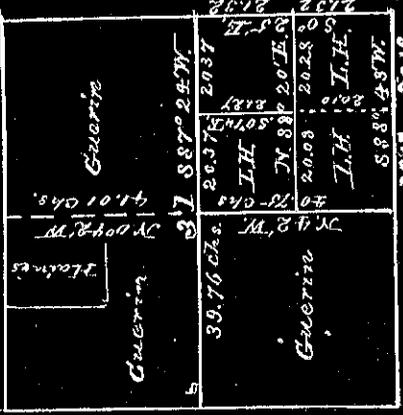

Recorded April 16, 1898
John Fitzhugh
County Surveyor

No. 198. 21 st. N. 10 E.

Chs. 176

Survey of a lot for Ed Thomas.

Begin at a point in the road 6.8 chs. West from
The S.E. Cor. of Sec. 35 marked by a stake and a round
stone 6' x 5' x 12'

Thence South near middle of road.

9.00 Horse bears West 100 lbs.

11.50 Small branch runs S.E.

12.50 To S.E. Cor. of the lot.

Place a stake and bury a rock 20" long and 6" diam.
for the monument to S.E. Cor. of lot.

Back to initial point and run West

15.00 Foot of hill N.W. ascend

16.50 Even branch west timber

16.00 To N.W. Cor. of lot on summit

Mark a meadow 9' di. c.H. - MRC for Cr. Thomas

Thence South on N. edge of lot.

20.00 Under small stream cross East

4.50 Summit, descend

12.50 To Cor. of lot set a post marked c.H. 100'

Thence East ascending

11.50 Foot of hill N.W.

15.00 To S.E. Cor. of lot containing the rock.

March 24, 1898 The survey

filed in Apr. 16, 1898 (County Surveyor)

531 A 74

NO 149

Chs. 115

Survey of S E 1/4 of NW 1/4 of Sec. 30
for J. A. Haines

Begin at the SW cor. of the lot.

at a new stake marked 14 1/4 S from which

(Old witness tree) an ash 12" dia. bears S 56° 24' E 44 ft.

new " " " 6" " " S 54° W 30 "

Thence North westerly very brushy } the corner No 28 M

2 50 Rocky Spur Slope west second

8 00 Open prairie

15 00 Same "

20 28 To a point 20 E. of 14 1/4 post by for corner, Surveyor
which I must accept and from which

(Old witness tree) Set 20" dia. bears S 57 1/2° W 30 W. S.

then " " Willow 6" " S 57° E 3' "

Thence East in N. bay of lot,

26 00 to N. E. cor. of lot. Set a post marked 'this firm' with

of cedar 20" dia. bears S 60° W 27 1/2 "

" " 30 " " S 20° W 27 "

Thence down E. bay of the lot

18 60 To a place near cor. of W. S. Wright's corner, witness tree, same,

March 20, 1893.

Witnessed April 16, 1893

John P. Hays

(Sole Surveyor)

37,20 W
 1830 W
 2145 S
 1245 W
 4130 E
 526 W

1.00

5.00

4.35

6.00

8.00

3.50

E

3,62 To lampyris State set on the 1st member
 line which I evaluate as the 1st.

Cor of Rice lower
 description

a Chumey Sloka 474 - 4 feet high
 Marked M.L. on N.W.S. side over
 J.L. cor. on W. 1 S. 31 S. 39. R 14 N. on
 west side from which
 a spine 14 in dia base S. 34° W.
 Mar. 51

a Boulder, 15 links N.W.S. 7.18
 E 7 W. l. mark + base N. 89° W.

Distance 49

Above described Rice lower contains
 43.17 acres

Curry County - State of Oregon
 Dec 22 1900

W. C. Smith
 County Surveyor

Survey for Ethna

1998 beginning a S. corner line 7-10 chains
 1999 U.S. Co. correction 1/4 1/4 stake
 1999 N.S. " " " "
 1999 W.S. " " " "
 1999 S.S. 1/4 center 1/4 stake
 40, 18. From Sec Com 3-4-9-10 S. on E. Boundary of
 Chain
 Co. S. E. Cor of Same Chain
 Stakes on Same chain are as follows:
 1/4 1/4 N. E. 1/4 Sec. 9 of Bannary is a
 post from which a fur tree 18. 1/8. 1/8. 1/8. 1/8.
 S. 60° 30' W. 1/8 in. 60'

A Ten oak, 14 ins diam N 72 E 18'
 135'
 W. boundary N. E. 1/4 S. 9. 70' in
 from which a fur tree 40 diam 13 1/2"
 diam 15'
 A fir 36 dia diam 8.0 1230' W
 diam 4 43

1/4 1/4 E Bannary S. 9 center post from
 which 6 dia diam 17.74 S. 10. 1/2 30
 A willow 8 dia diam 6.5 S. 10. 1/2
 122
 1/4 1/4 Center Sec. 9 center post on
 corner 12 dia diam 15.30 S. 10. 1/2
 1284
 An apple 10 dia diam 5 4.30 S.
 diam 111

Cherry corner Oregon
 Jan 12 1901
 D. C. ...
 ...

S. & Chiles June 14 1901

in T. 30 S. R. 14 W.

I begin at cor of Sec # 5-6-7-8 Thence
 15 00 W. and set a stake thence
 5 00 S. to Ocean bluff and set stake thence
 from base stake
 5 00 W. and set stake thence
 15 00 W. to Ocean bluff and set stake
 Community Co.

Survey for N. R. Smith, July 20. 1901
 in T. 30 R. 14 W.

I run S. from 1/4 1/4 stake at boundary
 N. W. 1/4 Sec 28. 15.
 20 00 Set temporary stake thence S. Center N. W.
 1/4 Sec 28 Thence S.
 40 00 Set temporary 1/4 1/4 between S. W. & N. W.
 1/4 Thence S.
 60 00 Set temporary 1/4 1/4 Center S. W. 1/4 Sec
 28 Thence S.
 80 82 Erect 1/4 1/4 Stake S. boundary of S. W.
 1/4 Sec 28. 82 N. 7. 10 W.
 I return and corner stakes as follows
 1/4 1/4 Center S. W. 1/4 Sec 28 is a corner
 from 4 x 4 feet long from which
 a pin, 12 78 S. 36° 15' E. 10. 28
 a pin, 9 78 N. 31° 15' E. 10. 29

1/4 1/4 Post-Cornering between N. W. & S. W.
 1/4 Sec 28 is an

alder 13 inches h. from which an al-
 der, 4 h. 12. N. h. 15
 An alder 7 78 N. 5° E. 10. 30
 1/4 1/4 S. 78 S. W. 1/4 Sec 28 is a chf.

run from 424 47 from

with

a. pin 6 to 13 at N. 30° W. 10, 20

a. pin 7 to 13 at N. 90° E. to 24-

to Cunningham Cr

Survey For Fred Blake
over

Silas Moore

I begin at 1/4 Post on E. 18, Sec

25 and run S to Cor. of Sec 25-36-

T. 40 N. 13 W. and Sec 36-31 T. 40 R. 2

W. I. resolution Cor. and proceed

S. at 20.00 Chrs I set line 1/4 1/4

Cor. I continue S. and enter 1/4

173 N. and 34 W. I. corner 1/4 1/4 Post

by setting it. S. 36 and E. 17

I go to Cor. of Sec 35-36, 24-25. and

run S. at 20.00 Chrs I set line 1/4 1/4

Post thence S. I enter 1/4 Post

W. 13, Sec 36 154 N. and 32 W. I. corner

1/4 1/4 Post by setting it. 174 S. and 16 E

I set line from 1/4 1/4 Post on W. 13.

of Sec 36 run E. 80.61 and enter

line 503 Chrs N. of Lemph Post

with line from Sec 10. and

a. N. 10 B. W. 30 S. 100

a. pin 3. 6 65 N. 11. 79

I now run ~~to~~ from E. 1/4 1/4

N. 6 1/4 Sec 36 to 1/4 1/4 Post N. W. 1/4

of Sec 21. 86° 01' W. on line line

between Cor.


20 15. Post 1/4 1/4 Post from which

a. Tan oak 13. 12 B. S. 256 100

22

Township 40 Range 13 T6 W M

	25		
		S. Moore Solar Line Dec. 1836	
		Quincy Oct 86 1876	
		F. Blake	



4030 a few S, 10.11.11 W. War 1/3
~~Chaco~~ on base Set 1/4/14 Poor-
 from which
 an older, 12 W. 13. W. 40 N. War, 21
 6045 Set 1/4/14 Poor- from which
 a myrtle, 10 B. N. 21.30 W War 14
 ample 8" S. 1545E " 31
 Reconrea Jan 4 1902
 D. C. Cunniff Jr

Survey for R. W. ...

Feb 26th 1902

To get bearings for initial corner & start. at 1/4 Post on CT line Townships R 14 and 15 W N 36th between

Secs 25 and 30 Thence

122.27^{ft} Chain link

104 feet

161

to the initial stake, so an iron stake

made of gas pipe 1 1/4 inch in diameter from which

a Rock point junction

ring the hole marked X being

N 21° 36' W, that 32 feet 8 inches

thence

102 feet

365.3 "

547.5 "

314 "

To an iron pin from which

a pitch pine 18 inches

in diameter marked B

CS Bemo of 44° 6' Apr 10 106.

feet 6 inches

146 ft 3 inches

926 10

369 6

281 3

96 7

To an iron stake from

which a pitch pine

18 inches diameter marked

S 00°

W 00°

W 01° 00' S

N 32° 00' W

N 29° 45' W

N 39° 30' W

N 31° 56'


W 30° 15'

S 54° 5' W

S 32° 45' E

S 34° 15' E

S 39° 45' E



~~28~~ C.S. Camps 18° 36' E. 1200-30

feet 6 inches
thence

29/5/8 394 feet 60 inches
28/30/8 317 " 56"


The place of beginning at
a more precise described initial
Stake.

All stakes in above described line,
except at all stations are in
inside of gas pipe 1/4 inch
in diameter

Magnetic variation in
July 18° 36'

Recorded this 27th
day of February 1890/1902

A. G. Smith
County Surveyor

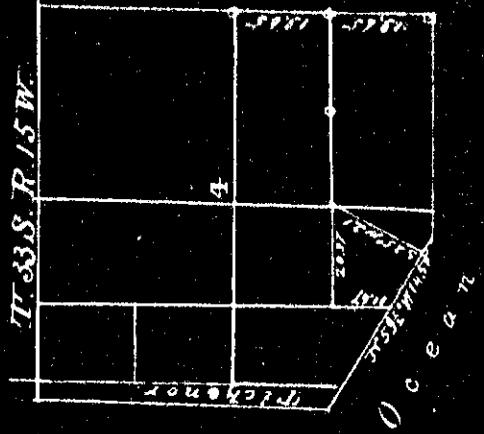

T. 33 S. R. 15 W.

OCEAN

PICKOVER

4

1000 1000

1000

1000

1000

1000

1000

1000

1000

1000

1000

1000

1000

1000

1000

1000

1000

1000

1000

1000


1000

1000

1000

1000

1000



then

11.67
S.S.
C.

11.67. Chms Co. N.W. Cor. of Grock. Spruyn
20.94. " " N.E. " "
and place of beginning
May 3, 1902

W. D. Dummerffgn C, S.
By John Fildyburgh
Deputy

Survey for B1

T 38 R 13 W. W. W.

I start at $\frac{1}{4}$ Cor. G Boundary of Sec. 18 and run W 80.00 Chs and set temporary stakes & pins on line of $\frac{1}{4}$ Post. or within them

I go to Sec. Cor. S 18-19. 13 W. area 13-24. 14 W area run NW 80.00 Chs and enter the Cor 9-18. 13 W T 12-13 14. W. 2.11 W. area .51

I run line line S $1^{\circ}31'6''$ to $\frac{1}{4}$ Post. and restore Cor 25 S. T 1.06 W of Center on Stake I had set temporary stakes along center of Sec. which I now return and correct one station as

$\frac{1}{4}$ Center $\frac{1}{4}$ Center and $\frac{1}{4}$ Boundary is a Basser Stone from within a few 60 m 73 6 3° NW Mar. 36

$\frac{1}{4}$ Cor Center Sec is a just 4 feet long 4 x 4 from which a pin, 30 Bars S. 59° W. Apr. 183

a pin 30 R. E. 3° N. Apr. 189

$\frac{1}{4}$ Cor Center $\frac{1}{4}$ area W. Boundary is a Stake 4 feet long 4 x 4 inches from

On Jan 1842, 24 78 N. 179 8' C. Apr. 26

I then go to $\frac{1}{4}$ Cor. Cor of Sec 18 and run 90 S. to $\frac{1}{4}$ Cor. on S. Boundary. Some Sec. being temporary stakes 20.00 Chs open and adjacent.

1/4 Center 18 G T, 50 S.

2- Centering corner S 80 Sec - long

from

80,00 interior - 1/4 Cor S Boundary Sec 18

36 G T, 86 S.

2 return area corner - 1/4 1/4 return 1/4 Center

area S 1/4 boundary

area set

A. base - stone 18 x 16 x 4 inches marked

1/4 from return

A line oak 30 R S 9° 45' E Dist. 54

a fir 36 " N 66° 30 E " 97

W

2 go to 1/4 1/4 Cor return Gen 1/4 area & boundary

1/4 area run off 45° W 20.12 Chis area set

1/4 1/4 Cor

A just 4 long 4 x 4 from return

A line oak 24 R N 19° 45' E Dist. 25

Thence E 12° S 20.12 Chis Sec. 1/4 1/4

from No trees

Thence E 12° S 20.12 Chis Sec

1/4 1/4 from ~~from~~ which corner stone

Cor from return

A fir 60 R, N. 12° 36' W, Dist. 48


Thence S. 45° E to 1/4 1/4 Cor return


1/4 Center area 1/4 E Boundary

Return Sept 20, 1902

W. T. Smith C.S.

738 R 13W

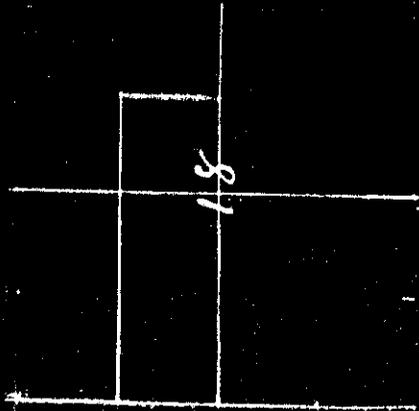



Sr. J Heiberger
R 14 W NW

Course Con to Sec 32-38 N 34' over

Sec 4-5 T 35 R 14 W Thence

Set 1/4 1/4 temporary Con

Markers 1/4 Con 123 Chms 7 41 8

I Change Course Marker to Run

N 44' S and ^{above} process W

Set 1/4 1/4 Con 200 feet above beam

bench

I was unable to find any trace of

Marker Con W. or of witness tree

I return to 1/4 Con. on a return line

6 on line Course 6 44' N. over course

temporary Stake and establish Con

by setting Post 4 feet long 4 x 4 and

marking witness lines as follows

A pin, 34 B N 30° S, Dist. 49

The following description is a line agreed

upon by J. Heiberger and J. DeLugger

beginning at the 1/4 1/4 Post. N. boundary

N. 6 1/4 Sec 5 and running thence

S. bar 1915'

S 10.60 Chms to a stake from which

a pin 48 inch BS 456 Dist. 6

and marked X CS

N 230° N 170

N 35 00 W 140

N 8 00 E 213

N 21 15 W 219

S 65 15 W 372

N 72 00 W 73

N 43 15 W 522

N 41 15 W 275

To a final Set on the Sec line 723 Chms

E of the 1/4 Cor Sec 5 from which a fur
line runs E. 3 1/2 feet - D.D.

Revised Aug 10, 1902
to Amniffy C.S.

Survey for T 35-1 R 14 W
Woodruff Coy T Heiliger

2 run from 1/4 Cor N 1/2 Boney Sec 5
40.00 Chis. Sec line 1/4 Center

80.00 " " 1/4 S 1/2 Boney Sec 2 Cor
line in trees of Cor 1/2 sections
trees

20.00 2 gal. Cor Sec 4-5-8-9 over run
Sec temporary stake

41.59 entrance temporary stake 1/2 Chis
2 restore cor as per improvement
over ~~to~~ ~~run~~ over return line

on line Course 6 55'S over
Course 1/4 1/4 foot - one section

Dist. a fur line. 444m. 7 feet run
from which

Alaker, 14 1/2 N. 28 E. Dist. 44

Three return courses from S. Boney

1/4 Cor E. N 1/4 on line line N. 34 E

one Course Center 1/4 temporary stake

a setting post proper - marked with
an iron pin from which

on 24 1/2 N. 55.30 W Dist. 152

Revised Aug 10, 1902
to Amniffy C.S.

W. W. M.
For

M-s of about 7

I begin at the $\frac{1}{4}$ Cor see line 29-30
22, 52 Chino incision. $\frac{1}{4}$ / $\frac{1}{4}$ Cor solution

~~22~~
by John Fitzhugh C.S.

I retraced line run by W 55° S
on a line line between the
con

I run from S side $\frac{1}{4}$ Cor W

13.11 to the beam bench over set

M $\frac{1}{4}$ Cor. 14 feet above the bench
on the bank which is a

ceder just 6 x 6 new. 4 feet long from which

at Rock the center one of three situated on the

bench 5 feet high $3\frac{1}{2} \times 4$ nearly square

W 01° 56' 45" N. Dist. 64.

Reconven Aug 10 1902

Survey for R. R. Hooper

to find E & W line through
 Sec 6 T, 40 R 14 W. NW
 The 1/4 Post on NW 1/4 of Sec 6
 being gone & stake at S. W. cor.
 of Sec 6 see and run to NW
 Cor and establish 1/4 Cor by
 making necessary corrections
 thence from 1/4 corner of
 run East.

E 26.00

E 40.00

E 60.00

E 81.51

Sec. lineary 1/4 1/4 Post

" " 1/4 "

" " 1/4 "

Entirety 1/4 E, 73, 70 S

Thence 2 run N, 89° 42' W on true line

between the corners and establish

the Post on correct line

Center 1/4 Post - E 1/2 of Sec to a

4x4 Post 4x4 inches from center

a 1/8 inches 73, S 15° 45' W Post

" " 46 " " N 22.15 E "

1/2

191

Center 1/4 Post to 4x4
 inches from center

a 1/8 inches 73 N, 11° 45' W Post

" " 5 " " S, 23 45 E "


Center 1/4 Post NW 1/4 to a 4x4

Post 4x4 inches from center

1/2

191

F.S. 6 Sec 6 T. 36 R. 1434



T39R14

36

T40R14

1

62

31





3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40

Survey For

Mrs H G Blake T Co
 T 36 R 15 W. N. M.
 Var. 20' 2' E.

Commencing at the N. W. of the lot
 Subd of R W Heame by the Frank
 Leaning Company Thence corner
 Reed South 39' west 8.99 chains
 from a certain rock which is a
 witness to the meander corner to
 Township 36 Range 14 T 15 W. 1
 N. W. on the South bank of
 Rogue River. Measurements from
 a certain letter R. which is
 marked on the North East
 face of said Rock thence
 South 51° 30' East 1 mile to
 point of beginning of survey being
 the South ~~corner~~ corner of the
 said lot

Thence South 44° 17' West 162.11
 feet to rock to the County Road
 thence 51° 30' West 62 feet to
 the edge to edge of Cahoy Road
 thence North 44° 17' East 162.11
 feet following the line of County
 Road thence South 51° 30' East
 62 feet to place of beginning con-
 taining 10,000 square feet.

Recorded Oct 13, 1902
 A G Smith
 C. S.

Musicians

of a lot in Cooper
 of fine lead. The base line of the line
 which for iron pin came in the ground by
 being below main line 14' 30' and the
 base a repetition of 30' W.

I commence on N. side of Jackson in center
 of 6th thence N. 30' W. 29.99 to N. Block
 102 when I find witness as examination in
 files notes thence I run S 55 feet to cor
 of lot and set iron pin for cor thence
 S, 50 feet thence W. 90 feet thence N 50
 thence E. 90 feet to place of beginning
 Iron pins on each cor

Remain July 20, 1903
 Darnoff Jr C.S.

Survey for E Jensen Mrs Aida Jackson
 and her Sec 5. T 33 R 15 W W.
 determine the center line E & W. and a line
 from center S. to M.L.

I run from no. 100 to 1/4 cor on
 E. 78' of side so I go to E. cor of 6.8 on
 of line a run

S, 40 Six temporary foot-

59.00 beam level is run at 58.00

I set line just over first bearing let
 W of 73 all the rock when it strikes the
 on the corner

I run from line 19 W. to 1/4 Post
 on west side setting line 1/4 center

Cor a 70.00

Block 1/4 Post 126 S

CIRCUIT COURT
 DEFENDANTS
 2
 EX.
 RAY HIRST, Reporter

I then run a line
 5-8. Co of Sec 5-6-7-8. 2750 are in
 cor, 173 S making a collection of 129
 I run from cor of 5-6-7-8 S. to M
 cor 12,86; are in line cor, 34 S
 collection 1,31

I return to cor of 5-4 are in -
 base line run S. 130' E on 5-8, 90
 over beach

I take bearing on 10000 Rock
 are fine cleavage slings of 120
 I take to be one described in field
 notes

I take bearing on about 2000 ft.

Cor I return to line 1/4 are left in
 N, 30 7 E 103

I go to Cent. line 1/4 are in
 E, 80 1/2 of slings are 83 S 1/2 N
 line line from E to W 89° 06'

I have pins from center 1/4 are
 Run S 130' to M 2 are left cor 26
 W of line from person M. F.

Regorance July 20 1903

D. Carney J. C. S.

for E W Jensen

See R 1574

Begin on Center M cor on M L cor - catch Jensen

Slide lower than

420 Rocky Irregular

S 1500 W 150

S 5600 E 1050

S 6530 S 710

N 6736 E 95

N 7334 W 447

to line of Tichenor this lower

S 2156 W 225

N 2034 W 688

to M L to a pin down in line
from Jensen which seems

Survey of Missouri

F 35 R 11 T 12

I begin on sec cor. 7-16-12-13

Thence N. 12 po West edge

To return to sec cor on rim

S. 15,50 Dis. 7800 ft of river distance
given in U.S. field notes

Thence

N 69° 00' W 4,44 Chms

N 36° 00' W 10,40 "

N 21 15' W 5,50 "

To Sta N, W, cor of Lot
which join by computation to section

11,54 acres

I run E from sec cor 7-16-12-13

5,00 chms thence S, 17,50 to River bank

Thence N 65° 09' W to SW Cor any by
computation & join the parcel of land
of Charles S. Jeff-eres which cover

1154

82519,79 acres amount contained in
said claim

Recorred Aug 12 1908

D C. Coniff
C.S.

claim for 8 1/2 88 runs

insure 5 R 12 W. W. M

I show from Cor Sec 12-13-14-15

Thence W. 1/2 M. Cor on river bank

I return to Sec on river N. 1500

Chs corner Sec 12 Cor Thence to 2000 Sec cor

Thence S. 450 Co river bank

Survey for George Sumner jr

Begin at M. Cor on N. bank of Fossil
River between Sec 20-21 T38 R14M.

W. M. Thence

Survey for Joe

Lamar - John Co
in Sec 28 T38R14W. 28. 28
- 9 on Aug 20, 1966

Begin at Cor. to Sec 28-29-20-
21 thence

E 964 20.00 Chs 307 Rem. 1/4 1/4 Post
S 964 intersect 1/4 post 29 T. 28
Return on line course S 87° 35' 34"
area at 1982 Chs 3 establish corner
1/4 1/4 post 444° 3' long from which

2. Maple 10" Dia R. N 89° W bear .79

To Subdivide the Sec 28 & 29

at Cor. to Sec 28-29-20-21 thence

S 20.00 to Timber 1/2 on N boundary
20.00 per Ch 307
40.00 Cor from to base of corner

or 20.00 trees, 2 provide for
S 82.40 interest - Cor to Sec 28-
29-32-33 42.40 E

Return to temporary Cor and con-
rect 00 per instructions
Elms cor

thence
Commence at 1/4 between Sec 28-29

E 10.00 Sec. Rem. 1/4 1/4 Cor on sumit. of
back bore, timber over clear
clear brush

25.00 Summits of ridge
Decena

40.00 Sec. Rem. 1/4 center of Sec

50.00 a creek 4 wide, good timber
area clear summit

curran at

60.00 Set-ten 1/4 1/4
 65.00 Summit of ridge descend
 80.00 Set-ten 1/4 between see 29-
 28

US piece notes contain me
 a witness cor has been set
 for cor on a rock precipice
 7.00 S of the proper position
 of the cor

I send flag man to top
 of precipice, and have him set
 flag on cor, one by triangle
 being I find ten cor is 8740
 chain off, and by bearing 2,43
 Chth of proper position for 1/4
 cor

I establish 1/4 in proper place
 by set 2,40 & one 1,33 S by ten
 cor

I return on line course 895874
 correction
 2060 establish 1/4 1/4 cor between 6 1/4
 of see 28 from which

a fir 60" dia 13 N 26 15 E 10 at 78
 4120 center cor from which 94
 a fir 48" 13 N 51 45 W 10 at 40
 on level 5" dia 10. N 8.30 E 10 at
 6180 1/4 1/4 between N 10 at
 a 44yd 8 10 S 8 0 W 10 at 19
 N through N, W, 1/4

N from 1/4 1/4 post. & line W
 line N 1/2 of see 28,
 2000 cho set-ten 1/4 1/4

5895874

4220 increase 14/14 20

2120 14 70 70

return on line course S 89° 0' W

64-21.10 set corner 14/14 from which
in above 10" BS 3916 W 102-

4

" " 6 " S 6430 E "

38

Revised Aug 30 1964

W. P. Summitt
Survey Surveyor

Deed of R W Jucker
in T 35 S R 14 W M.

Commence at Cor Co Sec 32. 33 - 4-5-

Jan 19 45 6

Thence

2000

Set line 1/4 1/4

4000

increase 1/4 Cor Sec 32-33, 19 S and
.26 W.

Return on line S 2 6 and 80 acres

1/4 1/4 S. area 13 3/4 of Corp Cor Sec

Stake 4x4, 4' long property marker

from which

A. Macrone 6" dia B. N 8300 W Hor

0

.29

Revised Jan 17 1907

D E Ginniff Jr

- - C. S. - -

Survey for Debot woodruff in Sec

9 T 35 S R 14 W

Commence at 1/4 Center Cor formerly

Established by John Fitzhugh

C. S. Thence 19 45 6

\$ 10.00

Set Tam stake

I now go to a corner post - set

on line 20,00 W of 1/4 Center post

area 10,00 S. of same center

Thence

\$ 20.00

increase 7 Cor Cor, 2 S. area

Set corner post 4x4" 4' long for

Sec S. E. to N 1/2 of NW 1/4 of S. 24 1/4

See 9 T 35 R 14 W from which

a yellow fir 8" dia S 4 1/2 6 bar

.03

Revised Jan 17 07

D E Ginniff Jr C. S.

Survey of

for

E. A. Bailey & Co. Surveyors
in Sec 36 T 36 R 15 N 36 W

The initial point of this
Survey bears N 52° 45' W
bear 19° 40' from T Cor 36-
37 R 14 & 15 W. W.M.
Thence

Course
S 40° E
W
N 72° W
S 88° 39' E

bear
4 25
12 50
4 56
12 89

along fence line to place of beginning
Containing acres 5.39
Less Contents of Gold
Beverly Cemetery 7.5
Contains acres 4.64

Revised Jan 23, 1907
D. C. Smith
County Surveyor

Surveyed Jan 21 07.
See employees at beginning
of former town
20° 50' 32"

107 1/2
11 8 7/8
12

27.30

8 17 45 2 42 25 N
D. C. Smith
C. S.

S 1/2, S 6, 1/4 S 36 T 36 R 15 W

71° 52' 45" 71' 29" 23,74
34° 8' 10" 425

58.306
to Base
Cavalry
11.58

71.1250

71.67



M/G 1/4 Sec 36 T36 R15

S 82° 31' W 11.83

S 76° 30' W 100'


S 75° 30' E 30'

S 22° 30' W 50'

S 22° 30' E 2'

S 74° 30' E 70'

S 22° 30' E 50'

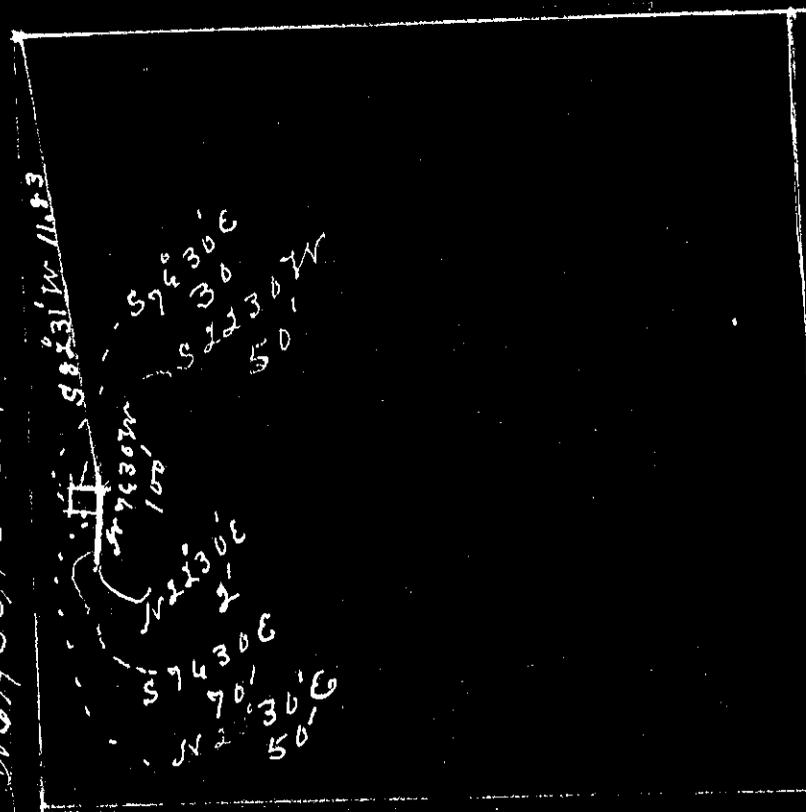



Survey of Ft

Correct location

See 26 T 36 - R 19

Constance Survey being a
H & L Co Gravel's Company with Bush
Solar attachment and 50 line chain
C Howland and J Howland
Chairman

Begin at center $\frac{1}{4}$ Sec 21

Thence

38,93 Incessant $\frac{1}{4}$ Cor 21-22 03

S

S 63° 26' 89.88 to find Cor to Sec. 22-23-24

- 27 Set. 1/2 in Cor

Make slight mark
but confine in extreme
of the corner on any mark
or tiege on any line of
in line or line

The marker changing
to storm I am compelled
to perform work and it
not being convenient to
get assistant, in 1907
- at

March 7 1907

Learned work with
and chain C Howland and
J McGeehan Chairman

1900 to 1907 belong to
H A Bates and run as
follows

Survey for 74 Slides


36 S. R. 14 W. T. M.

216 39.93 Cho.
In line

Line

23

S 63° 26' 6" West 89.48 Cho.



26



500	8,00
8,00	15,00
<hr/>	
48,00	23,33
	33

Showing the house, ^{belong to Mrs. Liles} is located 48,00 E, and
 23,33 Chas S, of Cor. to Sec 22-23-26-27
 T 36 R 14 W, N 711 as shown by accompanying
 plat

Peoria, March 9, 1909
 R. T. Smith Jr
 County Surveyor

Summary of ...

1377 ...

1378 ...

1379 ...

1380 ...

1381 ...

1382 ...

1383 ...

1384 ...

1385 ...

1386 ...

1387 ...

1388 ...

1389 ...

1390 ...

1391 ...

1392 ...

1393 ...

1394 ...

1395 ...

1396 ...

1397 ...

1398 ...

1399 ...

1400 ...

27-125 ...

Sec 5-32 T 40-41 R 13

China Sintered and weathered

No	China	Weight
26	S25 W	100
27	S2415 W	100
28	S2730 W	200
29	S39 W	100
30	S40 45 W	100
31	S4115 W	100
32	S4430 W	200
33	S56 W	100
34	S65 W	100
35	N88 W	33
36	N6130 E	200
37	N59 E	100
38	N46 E	100
39	N46 45 E	100
40	N44 E	100
41	N6230 E	100
42	N5630 E	100
43	N61 E	100

Do a pair which runs S 59° E the area 03 ch 6
 from the M G cor on the right bank of ch 6
 L Co line between Sec 5-32 T 40-41 R 13

Return to mine from first described China
 Westerly and Southerly

1	S82 W	100
2	S87 W	100
3	N8815 W	100
4	N8436 W	239
5	S7915 W	910

N° 33-34-35 is a Y or switch back - return N 32
 China Westerly and southerly

No	Course / Dept		01/26/24
6	\$270074	891	
7	\$124574	563	
8	\$31 74	495	
9	\$571574	231	
0	\$411574	200	
1	\$411574	330	
	\$544574	396	
	\$544574	396	
	\$511574	506	
	\$511574	231	

20138

In line 15 TR Co's line in col 5
see 6

Please see also page 212

Itemized from 12/19/07
D. G. Smith
Community Support

Field Co in Lots 4+5

W.M.
Cont. cont sec con date 5-6-7-8 etene

ON 75

Set Cedar Sloke

15 00

Set Cedar Sloke

6 66

Set Cedar Sloke

5 00

Set Chitim Sloke with 3 rocks

1 07

Leaving 1/3 area S of Lot 55
Set Red wood Sloke 4x4

20 00

Set 6 Con S 1/2 area Cor 4, set Chitim
Sloke 4x4

7 32

1773 bluff on shore of Lake Beau, set
Oak Sloke Marked S 1/2 A L 4 on Side T.M.C
A L 4 on N Side

20 00

Plot on page 212

Area from 12/907

D. Tenniff Jr
County Surveyor

Survey of 1871

T 41 N 137 W 1/4

Commence at T/C on E edge of Chiloé river between Sec 5-32 T 41 N 137 W 1/4

thence

- 9 00 S 89° 00' W 100 yds to corner post - 4 1/2 x 3/2 long 1/2 - 1 1/2 in
- 10 00 S 100° 00' W 100 yds to corner post - 4 1/2 x 3/2 long 1/2 - 1 1/2 in
- 11 00 S 100° 00' W 100 yds to corner post - 4 1/2 x 3/2 long 1/2 - 1 1/2 in
- 12 00 S 100° 00' W 100 yds to corner post - 4 1/2 x 3/2 long 1/2 - 1 1/2 in
- 13 00 S 100° 00' W 100 yds to corner post - 4 1/2 x 3/2 long 1/2 - 1 1/2 in
- 14 00 S 100° 00' W 100 yds to corner post - 4 1/2 x 3/2 long 1/2 - 1 1/2 in
- 15 00 S 100° 00' W 100 yds to corner post - 4 1/2 x 3/2 long 1/2 - 1 1/2 in
- 16 00 S 100° 00' W 100 yds to corner post - 4 1/2 x 3/2 long 1/2 - 1 1/2 in
- 17 00 S 100° 00' W 100 yds to corner post - 4 1/2 x 3/2 long 1/2 - 1 1/2 in
- 18 00 S 100° 00' W 100 yds to corner post - 4 1/2 x 3/2 long 1/2 - 1 1/2 in
- 19 00 S 100° 00' W 100 yds to corner post - 4 1/2 x 3/2 long 1/2 - 1 1/2 in
- 20 00 S 100° 00' W 100 yds to corner post - 4 1/2 x 3/2 long 1/2 - 1 1/2 in
- 21 00 S 100° 00' W 100 yds to corner post - 4 1/2 x 3/2 long 1/2 - 1 1/2 in
- 22 00 S 100° 00' W 100 yds to corner post - 4 1/2 x 3/2 long 1/2 - 1 1/2 in
- 23 00 S 100° 00' W 100 yds to corner post - 4 1/2 x 3/2 long 1/2 - 1 1/2 in
- 24 00 S 100° 00' W 100 yds to corner post - 4 1/2 x 3/2 long 1/2 - 1 1/2 in
- 25 00 S 100° 00' W 100 yds to corner post - 4 1/2 x 3/2 long 1/2 - 1 1/2 in
- 26 00 S 100° 00' W 100 yds to corner post - 4 1/2 x 3/2 long 1/2 - 1 1/2 in
- 27 00 S 100° 00' W 100 yds to corner post - 4 1/2 x 3/2 long 1/2 - 1 1/2 in
- 28 00 S 100° 00' W 100 yds to corner post - 4 1/2 x 3/2 long 1/2 - 1 1/2 in

Recommence June 12 1907

D. C. Cunningham
County Surveyor

Survey for B. T. Co of bank of Chiloé river in Sec 5 T 41 N 137 W 1/4

Commence at point 1070 S, and 900 ft of T/C containing 8 1/2 acres 1070 acre lot

S	1450
6	600
N 115	375
N 230	200
N 115 W	325
N 22 45 E	325
N 22 45 G	150
N 15 15 W	350
N 15 15 E	87

along the bank of Chiloé river on mile - from highest water

is a point 20 feet E of a sea wall etc. 6 1/2 x 7 1/2 long. Sp. for S. E. cor of a 1/4 acre lot containing 1263 acres

Recommence June 12 1907
D. C. Cunningham
County Surveyor

in sec 5 T 41 R 13W

which bears S 1000 and
MC on right bank of Chaco river

between sec 5-32 T 40-41 R 13 W W 1/4 being
S W cor of a ten acre lot - House

499

527

732

at 4.31 center a spruce tree 40" dia. - set a Chillum Stake

4" for corner

to piece of logging containing 131. acres

Loc as a June 2 1907

D. Cunniff Jr
Chainy Surveyor

Survey for M B Gilson in

T 40 R 13

begin at ~~cor~~ sec 13-14-23-24

corner

3920 minusec - witness

Survey for M B Gilson in T 40 R 13

commence at 1/4 cor. sec 23-24 then

4000 chains set - lamp. cor. which

N 25° E Dist 12.5' from a

Red wood tree, with service mark

523 on it.

Two poles are also marked successively

They are all witness but I

have no fence notes of them

Reverend Aug 24 07

D. Cunniff Jr

County of Lincoln

Review in the
Review in the

Commence on a joint which
leaves!

N	12,04
E	430
E	10,40
"	10,40
N	12,04
E	430
N	14,95
W	15,90
E	10,14

from the M.C. Cor Sec 8-9
T 41 R 13 W Thence
~~to the corner of Cor~~

Set stake for S E Cor of Lot
Set stake for NE " "
To NW

Thence along NW lot against
W of the initial point
From here or less to the place
of beginning containing 20 acres

Review Dec 5, 1907

D. Crummett Jr
C. S. 1

Stein over Block
ch cor lo - Sec 36-36

25-26 T 4D R 13 1/4 in the
as per US files notes
intention N face of Chelci
River

589307

39.60

I confirm no line 1/4 cor
no boundary in field notes
I confirm in
I take bearing on Rock
House & top of mountain and
find position Cor lot Sec
34-35-26-27 is 3.60 S.
I return on the line
between the lot Cor

79.20

W 84.566 39.60

I find a line as describe
in US field notes between
mine and farm in the
stream, it is also connect
by several old residents with
the the witness tree
I take bearings and find
the Cor will be in the
River

I set witness cor on the
line on the bank 1/4 C

" 19.80

from 1/4 Cor Sec 14 1/4 Cor from
addition 8" 13 N 1/4 E. 1/4 25-

" " 6 " N 33 3/4 E " 16

recovered Dec 9 1909

D. F. Munniff
C. S.

Barney for the
SHEET 40 R. 13 74

poss. exp.

at 20,000 set $1/4$ from 25-36 C to $1/4$
Cox and Currier Lewis and her

$1/4$ $1/4$ plug on river bar

2 go to $1/4$ $1/4$ Cox & Currier
of 74 (Catalpa) there

20,000 set in jump Cox

40,000 " " "

80,000

Entire plug S boundary 20 $1/2$
50 S & 36 &

~~4346~~

4326 40,000

4 set $1/4$ $1/4$ between $1/4$ of 20 $1/2$
on river bar;

~~At bottom of 74~~

On creek 12" lens N 74.458888, 33

Set $1/4$ $1/4$ center N 74 $1/4$ line

25- from

on line 8" 73 74 bar

" " 60,000

240

Barney Dec 9 1907

D. D. Sniff

Survey made to locate

the side of Rogue River at what is

the ferry landing at the center of

said ferry landing on the South side of Rogue River in Sec.

Township No. 36 S. of R. 14 West of Willamette Meridian.

Commencing at 1/4 corner between sections 9 and 16, Township

36 E of R 14 West of Willamette Meridian, thence variation 19° 39' E.

Distance

9° 30' W. 7.08 chains

To center of County Road at Ferry Landing
on North side of Rogue River

1° 30' E.

Course from North Landing to the Landing
on South side of Rogue River.

Latitude employed 42° 27' N.

Declination Greenwich

apparent noon 18° 13' 20" S.

Difference of time West of Greenwich

8 h. 17 min. 45 sec.

Local time by solar 10 A. M.

Date of Survey Jan. 29th 1908.

*Recessed This day of Jan
1908*

*D. C. ...
Rivers ...*



away! Admin -
estate of Fred R
reaper and son

Wife

Commence on the S & Cor of - Lot -
& Sec 217 35 R 14 W there

W	450
W 1736 W	5 00
W 1330 E	4 00
W 130 E	2 00
W 930 W	3 50
W 36 W	3 00
W 215 E	1 00
W 6415 E	4 50
W 3315 W	2 50
W 5510 W	3 50
W 2115 W	3 00
W 3636 W	4 00
W 5415 W	3 00
W	3 41
W 1716 W	3 60
W	1 33

to the Sec line between
Sec 9-16 containing
121.83 acres

Revised March 1908
D. B. Smith
County Surveyor

Survey

Y terms
Locate N corner of
S.E. 1/4 Sec 4

Commence at 1/4 Cor Sec 4-8-

thence by 19° 45'

2000' Set 1/4 1/4 stake

40,000 " " Center 1/4 "

60000 " " 1/4 1/4 "

80000 " " 1/4 Sec 3-4

After diligent search I can not find the corner or witness trees or evidence sufficiently reliable to resubmit the

corner
I find ^{remains} of a consuming description in field notes that this apparently been taken by fire and to now so decayed that I can find no trace

of scribe marks on it. I found a piece of wood that appeared to have been part of a stake with one visible mark on it, but it had been charred by fire, so the evidence was not sufficiently reliable to warrant resubmitting the corner.

This piece of wood was 120 S and 60 W of the tin corner.

Resurveyed April 4, 1888
D. C. ...
County Oregon

Black Bl
420 80'
4 20
12 45
21 45

Age of Survey
Location near a gum
stump of pine

7 Years

From stone to see
R 14 W

Commence a temporary 1/4 cor see
3-4 which I am certain is very
close to the original cor there
bar 19° 45' E

4000 marker on 6" dia T.C. 14 S or
line center 1/4 over N W cor
of home stone

6000 Set for line stake 4x4" marked
T 1/4 1/4 S for line N E cor

4000 Set line stake 3x3" marked T 1/4 1/4 S
on line see 3-10
thence in see 10

2000 Set line oak stake 3x3" marked
T 1/4 1/4 S for line S E cor of
corner stone

8000 top of ridge left flag stony
on corner line

N edge of a strip of timber
classifying into prairies or
galispud tree trees & about
two miles distant

varian 19° 45'

Lat N 42 30 48" N

Dec Greenwich 4 29 48"

High lime 8 17 45"

Doc

April 2, 08

Rezonaca April 4, 08

Site must be
County boundary

Map

and Walter
 Time set for burial of
 being stormy, postponed until 21

I commence at witness Cor (The
 Cor being in a lagoon 150 ft

chs

Of set - E to avoid lagoon thus
 on

150

1800

150

off set IV to line

N witness 1/4 Cor 19-20

167

Subst reference between witness Cor

and line Cor, 50 line close - and

117

40 E bearing correct on between

Cor N 34' E

CE continue N on correct course

N 34' E witness a fence reported

to be S + N line between see 20-17

3862

I set a line July at

3900

I confirm a reliable line of Cor

See 19-20-17-18, now testimony by

firmly positive to establish the
 Cor.

I go to Cor 16-17-20-21 there

IV enter 1/4 Cor, 30 S at

4027

IV witness - NTS, 140 E at

4000

and 131 S of a line line from

Cor from which 2 lines to Ch 1/4

Cor

I clear shrubs and set

the see Cor 66 N and 79 N

of the point. The station was

corrected line and witness

given course to 25 1/4 Cor

39,30

center line to 1/4 Cor Sec

19-20 of 316 Ast- 39,44

I go to 1/4 Cor Sec 19-20 then

20 00 Set line Cor 1/4 1/4 Cor

40 00 " " Center 1/4 " "

60 00 " " 1/4 1/4 " "

80 47 Center set 1/4 20-21, 89 S
giving corner from 1/4 Cor
on C line to 1/4 on NW 1/4
89 23'

I return and establish Cor
on true line and equal
Cholone to list

1/4 1/4 1/2 is a saw corner just- 3x5- 4 1/2

long from which a
white 2 1/2 Dia B N 53 456 Ast-
a 1/4 1/2 " " 8 9 056 "

31
27

1/4 Center Cor

a cedar post- 4x4 4' long with gas pipe
1" dia 3' feet long from which
a white fir 30" dia B N 43307 Ast- 134
an alder 18 " " 8 15306 " 146

1/4 1/4 Center NW 1/2 Sec 20
a cedar post- 4x4 4' long with 1/2
iron pin from which
an ash 12" dia B N 30656 Ast-
a spruce 40 " " 8 15157 " "

206
335

of run N 30' W from 1/4 1/4

W 1/4 Sec 20

N30' W

20' 00

Set-Down 19/4

CE

1/4' 00' line

3954

measures - Correll

1/4' 00' line

1/4' 00' line

of NW 1/4

24

guts

line

N 51' W

1/4' 00' Cor NW line NW 1/4 is a chert post

4" x 4" 4' long, fore 3/4' 00' line

a chert 5" dia 70 S 74 30 E. Set - 20

on near 50 " " S 77 60 W " 89

Center 1/4' 00' NW 1/4 Sec 20

a. near lower part 4" x 5" 4' long with

1" iron pin from chert

a. Spore 11' dia 73. S 52' 00' W. Set -

bury finisher June 23, 08

Lat 42 14 N

Long 23 24 28 W

4

Lat 42 14 N

Long 23 24 28 W

4

Keokuk June 28 08

D. C. Smith

Shanty Energy

run-out-

R/4W

Commence at a point which
bears N 74° 38' W from the center
1/4" 1/4 Cor N 74' 1/4 Sec 20 12,700 dist
- stone

N 78° 00' W 2,61
S 78° 00' E 2,00
S 78° 00' E 2,61
N 2,00

Containing 5,11 Chs a little more than
1/2 acre

Date of running June 23 08

Lot
see oppr. given
set in line
Local him

42 14
23 26 28
8 17-46
4 30

Return June 28, 06

J. R. Smith
Carroll County



Survey No. 1. T. 36 S. R. 13 W.

For J. r. Schlimann & Calvin Woodruff

March 1st 1905.

Begin at S. E. corner of sec. 9.

This corner stands in a dense growth of timber and I was therefore unable to take the same with the usual theodolite. The ground immediately west of here is too steep to run over. It therefore offers North 3.04 m.

There is a random line

variation of the north 19° 30' E.

20.00 ch. offset south 3.04 m. and set temporary

the corner.

40.00 m. north by the south of 40 sec. cor.

At this 388° 52' E on a true line on south end of sec. 9.

20.17 m. set by a true line to north

of random 36.00 m. true line. S 71° W. 36 m. true line.

marked C.S. 1474 S. 141.

At this corner take 75 m. and lead to range of

woods 145° 30' E, at 2 equal 1. 111.

At this corner set 25.5 m. distance of same

25.5 m. and arrived for reparation 1.

Distance north on a random line.

20.00 m. set Camp. 1474 cor.

At this corner take 75 m. and lead to

range of woods 145° 30' E, at 2 equal 1. 111.

At this corner set 25.5 m. distance of same

25.5 m. and arrived for reparation 1.

At this corner set 25.5 m. and lead to

range of woods 145° 30' E, at 2 equal 1. 111.

At this corner set 25.5 m. and arrived for reparation 1.

At 19° 30' E.

20.17 m. come 69 lbs. south of N. E. cor. of sec. 9.

Dec. 9 UG. 19° 30' E.

19.75 ch. to true 14/14 cor. This cor. comes south
12 lbs. and west 82 lbs. of Camp. Slats set at end of
random line N 9 S.

Now go to 14 sec. cor. on east edge of area.
Shore from N 89° 36' W UG. 19° 30' E
12.91 sp. went to true N 8 S. This at true cor. on
left. will be necessary to measuring the center 14 sec.
C. This must be from center it would have been in
corrected line N 6 S. through the center.

Begin at true 14/14 cor. on N. edge, of area.
Shore 329' E on a true line.

12.17 Set 14/14 cor. at N.E. cor. of area. Distance
from center which

Change with true 18 in. in diam. years 33 or 8

to the left. Marked U.S. 1414 S. E. I.

2.25 the true. Shlimans house diam 14.50.

34.24 = true 14/14 cor. from which

11.75 ch. 7 in. in diam. diam. A. 36.54 ch.

Shore 341' E on a true line.

UG. 19° 30' E.

11.75 ch. Set 14/14 cor. at S.E. cor. of Dr. 1 ch.
diam. diam. from which

11.75 ch. 5 feet in diam. diam. N 10° 30' S

14.8 lbs. set. marked U.S. 1414 S. B. I.

This survey was made & installed. The
true diam. 14.50. Shlimans and center of true

Recorded March 1906

Kalla - Carefield

C. Sturgeson.



Survey No. 2 T. 35 S. R. 14 W.

For Major Overton, to establish the line between him and Frank Bailey heirs.

March 4th 1905

Begin at S.W. cor. of sec. 33, thence N 89° 38' E Va. 19° 30' E

Rebracing township line

40.31 chs. Set temp. 1/4 Sec. cor.

42.88 " Come to Bailey's fence N 9 S.

48.79 " " " barn, and offset 53 chs.

40.47 " Set temp. witness cor.

42.50 " bears Bailey's field.

49.22 " Offset 53 chs. south to line.

40.63 " find no corner.

Now go to N.E. cor. of sec. 33 thence

S 15° 14' thence to old line.

80.77 Emlersent what to identify as S.E. cor

of sec. 33 and reestablish the cor.

Then I take the sun, and find the Va. 19° 30' E.

Latitude of place 42° 30'; declination of sun

March 4 12 o'clock 6° 25' S. Refraction

measured 1'

1170m S.E. cor. of sec. 33 to run S 59° 38' W

Va. 19° 30' E

19.52 chs. Set witness 1/4 1/4 cor, which is a piece of steel

pin, long driven in the ground from which

the older 8 ins. pin bears S 68° E 1 1/2 chs. dist

marked U S N C 1/4 1/4 S B I.

On older 12 ins. in diam. bears S 21° W 72 chs. dist

marked C S N C 1/4 1/4 S B I.

Said true 1/4 1/4 cor. comes under the building. to line

Bailey's barn and the road, 20.16 chs. from S.E. cor. of sec.

4970m. This 1/4 1/4 cor. 8 m. N. on random line

between the Bailey's heirs and Overton's land.

Va. 19° 30' E

78.69 chs. come to N. body of sec. and set temp. stake

To mark the place.

Now go to 1/4 Sec. cor. on N. bdy of Sec. 33

Thence S 89° 4' E on a random line bet. Secs. 28833 Va. 19° 30' E.

41.24 chs. come 79 lbs. south of N.E. cor. of sec. 33.

Thence, S 89° 48' W on a true line bet. Sec. 28833

20.62 chs. but temp 14/14 cor. said temp. cor. corner

38 lbs. west of N end of random line bet. Sec. 33

and Bailey line

Thence above 14/14 cor. to true S 16° E corner

line between Overton and Bailey lines

via 19° 30' E

13.69 chs. to 1/4 Sec. cor. on S bdy of Sec.

Recorded March 11 1903

Rolla Canfield

Geo. Dunnington

T 35 S R 14 W

3287 48 W 4124 ch

Sec 33

Heirs


Frank Bailey

Mayor Overton

✓

3287 48 W 4124 ch

316 W



For Coast Trading Co. Gold Beach Ore.

to begin at N.W. cor. of Court house in Gold Beach. Here to take the sun and find the variation of the needle to be $19^{\circ}30' E$.

about of place $42^{\circ}26' N$, declination of sun at 10 o'clock March 9, $4^{\circ}32' S$. Airt allowed for refraction 2' it being somewhat foggy.

Offset W. 71 lks; there

$N 23^{\circ}30' E$ 7.10 chs. Here to offset 26 lks. E. to line of road

$N 39^{\circ} E$ 3.24 "

$N 8^{\circ} 45' E$ 1.75 "

$N 1^{\circ} W$ 6.42 " Here to offset 50 lks. W. to ward Coast Trading Co's. stone.

$N 3^{\circ} E$ 4.85 "

$N 45^{\circ} E$ 10.99 "

$S 76^{\circ} E$.48.

$N 6^{\circ} W$ 1.23 " to west end of rock described in field notes.

to run the above survey to locate the following corners and distances for a true survey of the same road. (There is undoubtedly a mistake made in the original survey of the above road, as I cannot locate the stone lines at the proper place.)

Requencing 30 feet W. of N.W. cor. of Court house.

$N 23^{\circ} 39' E$ 7.28 chs.

$N 37^{\circ} 1' E$ 3.31 "

$N 6^{\circ} 54' E$ 1.78 "

$N 25^{\circ} 51' W$ 6.57 "

$N 10^{\circ} 9' E$ 4.99 "

$N 43^{\circ} 1' E$ 11.28 "

$S 77^{\circ} 51' E$ 48" to west end of rock described in

field notes of survey.

There is no sure way of making this survey in a correct manner. The Court house has been

measured E. something like 15 feet, but no record has been kept of the distance. The terminal point is a large rock, but the field notes do not state at what part of the rock the survey ends.

To add to the difficulties of this survey, it was very cloudy on March 9th & 10th when this survey was made, so that the solar apparatus could not be used. There was more or less iron scattered along the line between the least trading Company store and the terminal point, and at the terminal point there was a quantity of machinery which made it almost impossible to use the steel tape at that place.

Surveyed for Anton Walker & W. A. Rambley
March 29th 1905.

Place the cen. of the needle about 20.00 obs. west of
the Mon. Cen. to Sec. 20929 and find it to be 19° 36' E.
Lat. 42' 31" N; decl. of sun at 10 o'clock N 3° 19';
refraction allowed 2' the air being saturated with moisture.

This survey was for the purpose of determining
the proper place for the 1414 cen. lat. The Mon. cen.
and the 14 Soc. cen. on north boundary of sec. 28, and
the remaining of an E. & W. line through Lot No. 1 and
to corner 26.67 acres north of said line in Lot No. 1,
and also corner 26.67 acres in the remaining portion of
Lot 1 included to Lot No. 2.

The calculations for said division were made by
agreement of the two parties included, from the field
notes of the government survey. Said agreement is on
record as a part of these field notes.

Beginning at the Mon. cen. to Sec. 20929. Run
east and south in line between Sec. 20929 to 19° 36' E
16.6000 51 Comp. 6414 cen.

16.677 Come 93 lbs south of 14 Soc. cen.

14.1000 555° 32' N on a true line. Lat. 500. 20929
to 19° 36' E.

22.1000 51° 44' E. (a corner stake in mound of stone).

Thence south to 19° 36' E.

16.6000 51.4000 stake in mound of stone. Corn. as born
terminus of dividing line through Lot No. 1.

Thence east on dividing line, and set stakes to
mark the line.

The agreement between Anton Walker and W. A.
Rambley pertaining to the above survey is as follows:

This agreement entered into between W. A. Rambley

of Clatsop County Oregon, and Charles Walker
of the same place, witnesseseth:

That each of said
parties own a one half undivided interest in the
following described land, to-wit: Lots 142 & 143
T. 35 S. R. 11 W., and the said parties being desirous
of dividing said land into two equal parts, and
concurring entirely on part therefore both parties hereby
agree to have said land divided in the following manner:

Beginning at the N.W. corner of the N.E. 1/4 of the N.E. 1/4
of Sec 27 T. 35 S. R. 11 W., thence south 16 35' E. to
thence west to the Illinois river, dividing said land into
two equal parts containing 26.67 acres each, and N.E. 1/4
Runway agrees to take as his share of said land the
northern 26.67 acres, and Charles Walker agrees to
take the southern 26.67 acres as his share of said land.

As witness our hands and the stem parties have
affixed his signatures.

Witness my hand and seal of the County of Clatsop
this 30th day of March 1905.

Supreme Court of Clatsop County
(Charles Walker) | Signed (Charles Walker)
(Charles Walker) | (William H. Campbell)

Recorded March 31 6 1905
Clatsop County Oregon

T 35 S. R. 11 W





No. Council District

30	S. 244578	S. 2.50
31	S. 13074	2.50
32	S. 574	2.50
33	S. 95074	2.50
34	S. 1874	2.50
35	S. 3571	1.70
36	S. 4874	2.50
37	S. 32374	2. "
38	S. 26574	2.57
39	N 650	5.50

Recorded Jan. 20th 1907
 Geo. B. Wilson
 County Surveyor

Survey No. 2 T. 22 S. R. 15 W.

For John H. Currey Dec. 10th 1908

This survey was for the purpose of establishing the north and south boundaries to Currey claim

No. 2020 E

A. Drew and Callen Ellis were runners in a line.

I begin at corners of Sec. 20, 21, 28, 29, 1st find two pieces of iron for corner with a cedar 12 in dia. at or by bearing tree standing, bears N. 55° W. 1st k. and agreed with U. S. field notes. Then I run S. 89° 30' W. 80.42 Ch. to 3rd Ch. Wagon Road from Post. Orford N. S. S. 1st corner N. 42° 35'

24 Chs. begin descent in ravine

11 " " Abraham sills, wide

N. 40.21 which is average distance do not find any trace of $\frac{1}{4}$ Cor. post nor bearing trees

40.21 met bet 14 Dec. post at average distance from which an Alder 6 in dia. bears S. 10° E 7 1/2 ft. dist.

" " 8 " " " N 65° 0' 15 1/2 "

51 Chs. Enter marshy bottom S. 1.30' E. S. 80' W.

61.50 " Leave Swabish

68.00 " Bond's wagon road and begin to ascend bluffs

71.00 " Top of bluffs and enter open ground

80.42 " Set post for temp. Sec. corner.

From 90 to S. W. Cor. of Sec. 29 and run north to establish N. W. Cor.

of Sec. 29 of which I found no trace by Cor. or bearing trees to said Cor.

32 1/2 Chs. Wagon Road

46 " Old Skid road

58.75 " Log fence

79.77 " Intersect line running near from

T. 32 S. R. 15 W.





Survey No. 3 T 41 S. R. 13 N.

For Thos. Moore, Oct. 16th 1901

This survey was made to establish
the line around Thos. Moore's

Tract 2028th C.

Fletcher Land was shown

as shown.

3 1/2 acres at 4 Cor. bet. Sec. 3 & 4

from which a lake will be dug.

Quarry located N. 51st. 80 ft. N. of

that sec. - Boundary stake for Thos. Moore

Tract 2028th C.

Gen. Oak near S. 61st & 7th N.

10.00 " Branch 3/4 the way down

2000 " Subsidy road on edge

1/4 N. Cor. - 1/4 N. 1/4 Sec. 3 & 4

which is 176 ft. from the

an older survey.

Subst. 500 ft. S. 1/4 Sec. 3 & 4

2000 " Subsidy road on edge

1/4 N. Cor. - 1/4 N. 1/4 Sec. 3 & 4

which is 176 ft. from the

730 E. 1/4 Sec. 3 & 4

1/4 N. Cor. - 1/4 N. 1/4 Sec. 3 & 4

1/4 N. Cor. - 1/4 N. 1/4 Sec. 3 & 4

1/4 N. Cor. - 1/4 N. 1/4 Sec. 3 & 4

1/4 N. Cor. - 1/4 N. 1/4 Sec. 3 & 4

1/4 N. Cor. - 1/4 N. 1/4 Sec. 3 & 4

1/4 N. Cor. - 1/4 N. 1/4 Sec. 3 & 4

1/4 N. Cor. - 1/4 N. 1/4 Sec. 3 & 4

1/4 N. Cor. - 1/4 N. 1/4 Sec. 3 & 4

1/4 N. Cor. - 1/4 N. 1/4 Sec. 3 & 4

1/4 N. Cor. - 1/4 N. 1/4 Sec. 3 & 4

Thos. Moore

No. 8 (Continued) Chas. Moore

500 lbs. Saps of under

1000000. Soft red wood picked for upper
S. E. Cor. from which a Jack oak
C. W. drash bears S. 100 lb. 36. 1 hundred.

Thence North.

No. 11, 440 lbs. Intersect point of log running

Geo. S. 11, 440 lbs.

County of Boone, W. Va.

No. 4. (Continued) Al. Marsh.
\$0.00 Chs. To place of beginning
Geo. S. Wilson
Co. Surveyor.

Surrey No. 5 T. 37 S. R. 15. W.

For John Mendell.

Nov. 3rd 1909

Commenced at 4th Cor. 4th St. S. W. 33rd
Chicago South

Jan. 20th 1910 E.

South 52.50 ch. Steam 4th St. and cross St.

50.00 " found Cor. 7th St. 12.50 33rd

Chicago 10th St. 4.8 Cor.

East 1/2 and 1/4 at 1st

West 8.25 ch. 30th St. 5th St.

24.00 " 7th St. 1st St.

60.00 "

30th St. 1st St.

26th St. 1st St.

Journey No. 4 T. 30 S. R. 15 W.

19

Journey for Ed Cheever and Van Marpall

May 20th 1910

Locality J. P. Olsen and Sylvester Somers
as claimmen and John Furber as Patman
Standing at the corner to Sections
26, 27, 34 and 35 in Township 30 South
Range 15 West, which is a 1/4 Sec. 34
30. 29 square, from which a 1/4 Sec. 34
30. 29. bears N. 72° W. 110 ft. dist.

Other witnesses are

Clad near south

1420000. near bearing EP 11 and into timber
2350000. Opening EP 11 and into N. 7 S.
2450000. Thick to the wide of ground
and center much and timber
2540000. Co. 2 1/2 to. West.

found the witnesses to be both
down but recognizable. At a
1/4 Sec. in center of line N. 7 S.
and 1/4 Sec. Co. 2 1/2. from which
11. 30 in. in dia. bears S. 71° West
from thence an offset 200 ft. South
from East.

Along line at Iron pipe at terminus

Geo. Fitchbaugh
Deputy Co. Surveyor.

Survey No 7 for Curry County

Journey to Change County from
of To Cal Gwin
Commence at J. Crook's Place
Here

N 2330	6	2.25
" 4330	6	2.00
N 51	6	5.50
N 72	6	2.00
N 81	6	1.91
N 88	6	1.76
N 96	6	7.63

at 240 Cross in Belton Station
20-21 190 N & W Cor

N 74	6	7.00
N 7	21	1.50
N 23	21	7.00
N 30	21	7.50
N 61	21	15.00
N 81	21	4.60
N 85	21	

West-Union Train

Recommence this 19 survey on
March 25 1911

at ~~Union~~
Camp and beyond

Survey No 8 for Chauncey Fry to find corners of

Claim in Sect 2 - T 33 R 10 W M began April 8, 11
Began Survey on 2nd of April 1911 using a Koch
trussit with Sany meter Solar attachment as-
cor to Sec 1-2. 35-36 T^s 32-33 R 10 W M M.

John Hall }
Burt Baker } Chauncey
Peter Fry } Flagman

Commence at cor described above thence on 20° E
57⁰⁰ across hill insect cor set by foresters 04
N and 10 E

8⁰⁰ on this course the following is description
6,00 enter brush

20,00 set temporary 1/4" 1/4 cor

21,00 Make trail to West-Strake

22,00 Grain patch 1,50 wide

33,00 a stream .02 wide

70⁰⁰ set temporary 1/4 marker T. 17 S, C, S.

A 2 in Oak 10" dia marker T 1/4 S, C, S.

4 from the gramma Bemo

N 38° E dist 10

a rock oak marker the same

S 32° 36 E dist 121

The last described line has scribe

marks 1' above the gramma, and that

is a peg driven in the gramma .07

S. on .02 E of the post-ditch

a creek .02 wide course S 70° W T 17° 06

intersect a rock 8" x 10" 8" high set

in the gramma marker N 24

thence N 20° 00

1,00 a creek .02 wide course S 90° W T N 9° 06

3,00 trail from hole at Bldings

April 4 storm

April 6

4,50 cross SW corner ¹⁶⁰ of grain field about

9 acres

- 15,000 50% of range Owens
- 18,000 a stream at Haine 73-118 W 8/106
- 19,000 fma rock bet by forests 815
Thence N, 0,00
- 20,000 a stream at iras Cross at 7, 877 8100 G
- 21,000 fence at 74 cor of grain field
- 22,000 culture in rock broken 7 on 8 side one
H on 17 side
- 23,000 det rock block 777 mountain 14 50 C.S.
- 24,000 fence which on rock 6 det 8 market
- 25,000 77 N 73 S 96 W west 28
Thence N, 2,000
- 26,000 Cor 2 rain field
- 27,000 creek 03 7000
- 28,000 This trail at 777 - 77 on 78, 118 8100
- 29,000 same track at 6 cor of grain field
- 30,000 interest from Haine 118 on 116 side
118 6 ma, 12 S det pine mountain 118
Thence N 10,00
- 31,000 Cross primary interest from Haine 118 on
- 116 side, 118 6 ma, 12 S
det pine mountain 118 6 C.S.
- 32,000 Thence at 750 G 72, 30
- 33,000 det 750 dia
- 34,000 det 06 "
- 35,000 a rock marker 77 10 6
- 36,000 det pine marker, 8, 14 8, 28
Thence 8, 10, 00
- 37,000 across primary culture. cor to 118
118-035-04, 18 74 ma-17 8
- 38,000 Accorara April 18, 1911
D. L. Lanning Jr
C. S.

St. Louis, Mo. John B. Bilsing, Army Reserve

with Sangre de Toros
C.H. Bilsing (Common)
O.S. Bilsing

April 6 1911

Began work on the Sec 1-2-35-36 T^s 31-33 R¹⁰ W¹⁰
M.M.

Thence via 20° C.

1⁰⁰ enter grain field about 1500 long 800 wide
2000 set T 7/17 in edge of grain field
3000 a wire fence line 175

4000 corner line in trace of Government Con
line oak brush ^{legion on top of the} believe to be within
line. None got no fence notes in Con
set oak post 4x7 4 long
T 148 C.S.

6000 set oak post 7x7 4 long far marker
T 7/14 S.C.S. for temporary Con from which
a fir snag 36 dia S 42.30° E set 17
Thence N 20° W

8000 across into prairie enter brush
2000 set oak post 4x7 7 long marker C 7/17
CS from which a white oak 12 dia
T 31 30° E set 21
Return to 19/14 Con S boundary S 74 7 sec
36 mark within line a fir 30 dia 18 N 83° E set 207 set
Thence N 20° W

5000 Come grain field

1500 enter brush

2000 set cedar post 6x6 "Marked T 13 4 S.C.S
from which a fir 10" dia 18 S 18° E set 206

April 7

2 go to temporary 1/4 Con S boundary
Sec 34

Thence S 45° W 28.28.

~~1600 a creek on the east~~ ~~1600 a creek on the east~~
200 Decina enter brush Sec 34 10 W 10 W
first oak

Survey No 12 F 32 R 15 W 9W

for Cornudas + Louche to find E 1/2 of
Lot 8 Sec 32

N
Commence at S Cor Sec 32-33 then
69.29 set 1 1/4" gas pipe with stake for T Cor
to Sec Lot 8 Thence

W
1.50 County corner

16.00 1 1/4" gas pipe with stake from wire

N
a fir 18" dia Marked RT 73 N 39 E br 24
9.73 set gas pipe with stake for T from
with a corner of RT 73 N 85 30 E br 177

E
107.00 set 1 1/4" with stake from which
an area 6 dia 73 S 86 W br 07

S
to place of being 9.73 containing 9.73
acres

Revised July 12 11

to insert

C.S.

Survey for E Dwellers and N 7 1/2
in T Lot R 14

Commence at Cor Lot Sec 2-13 Thence

S 15.00 set pole at center of N 16 S 40 N
to Sec 13

70.00 corner at Cor 73 S area 35 E

to return to center of N 16 S 40 N
Sec Corners Stake 18 S of Ten area 8 E

to run T at right angle to corner
line S 89 30 7W

8.00 Six Run bar

19.50 Run with stake corner pole in

Ch. Run

Lot 42 46

Revised Aug 10, 11
to Cummings

Summary for Ralph Edwards in
in T-30's & 12 75, 76, 77, 78.

Commence at Con Co See Co. Sec. 1-5
12-13 75, 11-12 76
T-30's

1-17 77 The entrance from Con bet
to T of Cardiac 053, 77-6
1-18 77 Confine in trace of 12 77
Business letter

1-19 77 Continue from on 12 77
and app. 77
1-20 77 Return to - & T. Con over

Course and resolve Con during Term
158 77 177 of Con course during
1-21 77 T of 12 77

1-22 77 Course 7, 7, 7 & size 86.4 by
diting 64 77 T 8121 set inside
1-23 77 from 12 77 18 77 18 77 18 77
1-24 77

Revised Dec 11
to Cummings

Jan 4 21 33
Dec 4 16 g.a. 11

Survey for Lease ~~Thy~~ and others

Commence at 1/4 Cor 18-19 T 35-R 11 NW, NW 1/4
Thence var 20°

S 40° 00' 00" West 1/4 1/4 NW 1/4
40,00 " " " " " " NW 1/4
60,00 " " " " " " S 1/4
80,00 " " " " " " 1/4 Cor 19-30. 190 7R T
23 5 Thence

6 Thence Sec 19-30
at 450 distance MC on left bank of stream
side Thence 64 N
return to Center 1/4 Cor Sec 19
and cross and establish cor by
det at 95 7R and 1 S.

Lat 72° 32'
Sec 6' 13" 9, A.M.
RTO ~~and~~ you
C. 1850

Survey of Mining Claim for Mrs. Helen
Seaman Lot 7 S 13 T 35 R 12 NW NW 1/4
Commence at Cor Sec 12-13-7R 8 bet 14 & 11

Thence

S 300 Cross Mining ditch Course S 40° E
" 300 " Branch Mining ditch Course W
700 " " " " " " S 20° W
1000 " " " " " " S 20° E

1200 Mining Cuts

1700 Cross Mining Cut

1000 Right Bank of Hogan River

~~Lat 72° 32'~~

Sec 7-04, A.M.

• E. Cor Sec 12-13-7R 8 bet 14 & 11
180

Summary of Mining Claim Controversies

of return to Co. Dec. 7-12-13-18
Tanner

5893877

1200 intersect ~~at~~ ^{by} Bank of Pogo
77

589386

900 Sand and gravel, intersect
Mining Cut washer grave on
out side of line

600 ~~gravel~~ and boulders with
Soil on top boulders on
700 Mining cut which contains 8
in it

800

Same cut

900

and of course

539306

000 Sand and boulders in it

Gravel on lot 1100

1000

Mining cut

1100

of Car Right Bank N.R.
Dec 13-18

Dec 72-03

Dec 104 E.A. St.

Acres Dec 11 1861 Mining for C.S.

Survey for disastry and others

T35 R11 N. 7. W. Oct 12-13, 1911
bar 28° 6'

Commence at 1/4 Cor Sec 18-19 Thence

- 20.00 Set Twp 1/4 1/4 Cor
- 40.00 " " Center 1/4 Cor
- 60.00 " " 1/4 1/4 " "
- 41.00 Fox Creek 50' wide
- 80.00 Intersect 1/4 Cor Sec 19-30 329 N. 7
23 N

E Section Sec 19-30 bar 22°

245: Intersect M.C. E of bank of Illinois
River 64 N
of ... return to Twp Center

1/4 Cor Sec 19 and corner and
establish the Cor by set it 11
24 167 N of line plus and build-
ing rock mound and marking
Illinois River
Recurse Dec 20th 1911

Lat 72° 39'
Dec 6° 10' S. G. R. 11

To ...
C.V.

Survey for Lawrence Cadaga
 Summit T 38 R 14 7W
 3/19 11 C R Survey done by Burton
 Walker
 Commence at 1/4 Sec 16 -
 21 Thence

S

Bar, 10° 45' 6"

2670 Set T 1/4 1/4 Cor

2524 Right bank of White River

4000 Set T 1/4 Center of Sec

6070 Set T 1/4 1/4 Cor

8070 Entrance 1/4 Sec 21-28 T 5 S

T. 50 N.

a^o return on line Course at 1' 04' 6"

Over equally similar other forms?

11070 20.11 Set 1/4 1/4 a fir post with iron pin 1" dia from which

a line oak 8" dia 25.5' 6" Cor 22

6622 establish 1/4 1/4 Cor which a fir limb 3x3 from which

a fir 66" dia 28' 1" 72° 7' 20" 21/4

a now return to S, Center 1/4 1/4 Cor
Thence

3950 Entrance 1/4 1/4 between Sec 21-

21 76 S. making line course at 89° 20' 6"

S 1/4 1/4 Cor Sec 20-21 no mark by

a fir post - 6" dia 4 1/2 long from
Whitely tree

21 End of N pier of bridge 2524 W sec 1, 65

Set 42 1/7

Sec 21 1/4 N

Reconsec Dec 4 1911

D. Sturminoff
C. S. P. H.

60,00 Set T 1/4/14 Center NE 1/4
7985 Center Set 1/4/14 on C Sec of
N 1/2, 10 S

2 return over station
on 1/4/14 NE 1/4 by clearing clo
and setting a fire line from
Wich

a low oak 6' dia 18 1/2 5' diam 9

Winter June 10 1912

Station 41° 42' N
Station 22° 57' 10" N

Station

Recent June 25 1912

26 mm of p c s

Survey for L. Carlson
to station on of 1/4 of 1/4
and 1/4 of 1/4 of 1/4 of 1/4
76 T 31 R 15 TR containing 60 acres

2 corners of Carl - see 8-4-9-10
Shene

5 2600 Set-T 1/4/14
4014 Entires 1/4 9-10 03 TR
2 return to T 1/4 1/4 Con
one establish con by clearing
difference one selling

a fence from 8" dia from where
a spruce 12" 18" N 43° 30' W diam - 1, 37

2 90 N 2W Cor Sec 10. There
40.11 Center Sect Cor. 0.6 S
at 3000 feet T. Cor of tract
return to T and establish N 6 Cor
& start by connecting and setting
crossing post markers 1/8, 1/4 S with gas
pipe No. Recs for witness

2 90 E 00N Center 1/4 1/4 plens
NW 10000 Sect T 1/8 1/4 from S. E Cor of tract
2500 " " 1/8 1/4
4000 Center 1/4 1/4, 08 NW 570 8

return to T 1/8 1/4 area establish
to setting convenient post - a cedar
marker 1/8 1/4 S from S E Cor of tract
from which
from older 6" dia 78 S 13° 30' 78 diam - 1, 3

1/8 1/4 Cor N Center Sec 10, a cedar
from witness
a-pitch pine 5" dia 78 N 52° 45' 53

From June 16
at 48° 52'
Dec at 3° 14' 50
witness 20 1/2 6
The same June 7 1912
to witness July 7 1912

Sagway for Cape 7822

Nov 26-1912

Commence at 1/4 Co. S corner

see 3 T 31 R 15 N Chene

N 30° 51' 11" parallel with GTR base of sec
1760 left bank of Filinas Creek

to right bank

down to T 19 1/4 cor

Chene & continue W through sec 300

Chene Co. 1760 Cor 7 1/2 sec 300

to cor of Bromery sec 300

300 G T 21 S. base of Chene

Cor 175-200 on bank

Commence 38' 10" by 78' 10"

Chene 41' 11" by 15' 6"

Chene

78' down creek flows to 6 T 31 R

280' creek

along

38' 10" left bank in bend

34' 11" " " " " " "

20' 0" " " " " " "

Chene 05-08-023

Commence from 10.8.11 78' 10"

Chene

78' down left bank

N 2000 entrance to 78' 10" by 78' 10"

det. same det. from base
of Chene

Chene 24' 10" N 66' 30" West-02

T 1700 well

T 1700 entrance

T 1700 42' 51"

Survey for R Cape over Star
March the line S89-27 31 P 15-

Commence at cor 2-3-10-11 thru

N 30.50 74

2000 feet 7/17/17

3000 Lena

2950 Lena creek SHT 2/11/14

3600 Lena

4000 Lena furia no base

Cor 2

7991 Entrance cor 2-3-34-35

600

Entrance to creek area SHT

Entrance to creek area

S. side Coralling in the woods

Entrance to 1st 2nd 3rd 4th 5th

Lena 2000

Lena 2000

Lena 2000

Do 2000 Lena

Do 2000 Lena

Do 2000 Lena 2 19 18



Sec 15 T32S R15 W11M

81-8-13



Uxeraca. No 1 Trip 32 Traps 10015

10022-30

For McPherson, Ferguson, Morrison,
Clemens and Matherney.

July 25, 1913

Law of Needle 2150F

McPherson & Thomas
Chas. Harey Chairman
East Fork

I begin at the E. side corner on the
East boundary of Dec 13 1875 2150 F
and run north on a standard line
meeting the N.E. cor. of Dec. 13
at 2003.5 feet 1002250 F.
Then run west on a true line
about 100.

at 2000 feet alt to hill top which mark the
N.E. corner of McPherson's property
1002250 F. Come to north corner where line
1002250 F. Cross line to about 1000 feet
on grade here.

Run on line 1002250 F. See
3000.5 ft alt to hill top which mark S.E.
corner of McPherson's property.

Beginning at the N.W. cor. of Dec
13 1875 2150 F
1002250 F
1002250 F
1002250 F

line 1002250 F intersecting the North boundary
of Dec 13 at 1875.0 feet 3 feet to last of
quarter between Dec 13 & 18 found the
first to N.W. corner standard but the
evidence shows ~~that~~ true. Set new
post and marked it properly from
which a 25 inch red fir tree bears
N 64 25 E 333.5 feet marked 1002250 F
513 7 38 78 15 20



I was led to believe that the
 amount of \$370.55 is the total amount
 of money in the account.

When I get back to the bank I
 will find out the amount of the
 money in the account.

I will also find out the amount
 of money in the account.

I will also find out the amount
 of money in the account.

I will also find out the amount
 of money in the account.

I will also find out the amount
 of money in the account.

I will also find out the amount
 of money in the account.

I will also find out the amount
 of money in the account.

322 feet intersected the corner
of the old mine. (Limestone was the following
Limestone was the same as the one at the
corner of the mine.)

The boundary and the limestone
is a fault. The limestone is
the same as the one at the
corner of the mine.

The limestone is the same as the one
at the corner of the mine. (The limestone
is the same as the one at the
corner of the mine.)

The limestone is the same as the one
at the corner of the mine. (The limestone
is the same as the one at the
corner of the mine.)

The limestone is the same as the one
at the corner of the mine. (The limestone
is the same as the one at the
corner of the mine.)


The limestone is the same as the one
at the corner of the mine. (The limestone
is the same as the one at the
corner of the mine.)

The limestone is the same as the one
at the corner of the mine. (The limestone
is the same as the one at the
corner of the mine.)

rough and brushy country. In order to save time and a great deal of difficult work, it was, ^{mutually} agreed between Clemmiff Jr and Jesse Turner the two interested parties, owners of the I begin at a point 7.00 A east of the Standard corner and run South I then began at the above described point and run a line south till I came to the edge of the bluff to the Pacific Ocean ^{west of} Hunter Creek. The survey was concluded

Records May - 1914
McCarthy
C. Harvey

Fractional Sec. 12
Tp 37 S R 15 W 1/4 M.

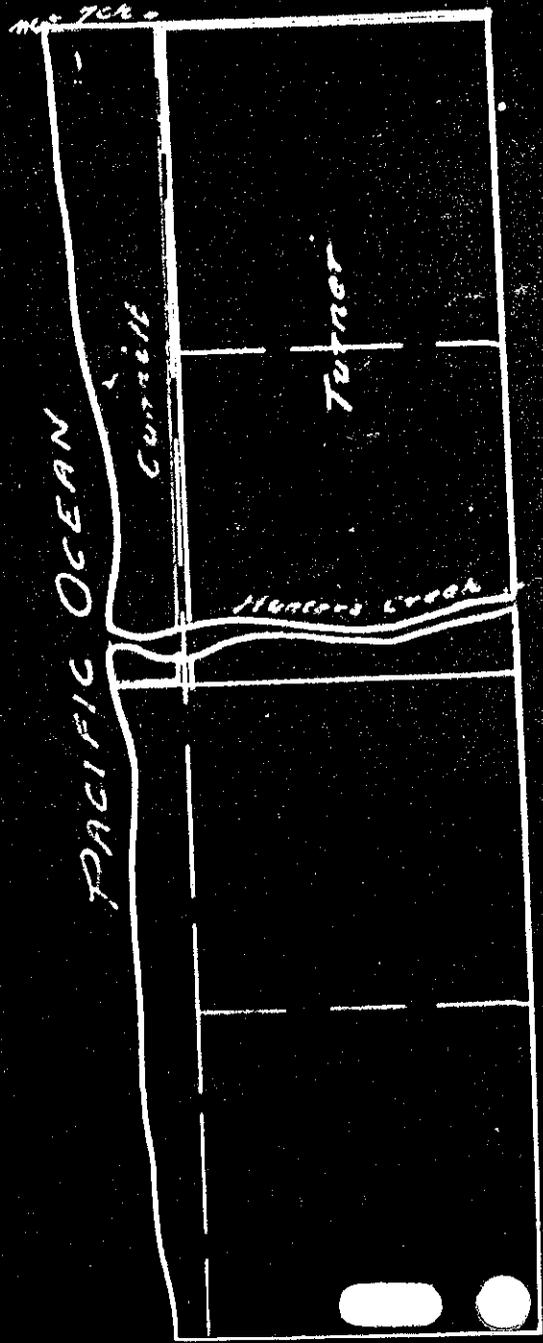

Gravey # 2

Trp 27 - 63 SE 6

To separate the grey sand from limber
land for slane. Fitzpatrick's
beginning at the SW corner of the
6 T 39 R 13 which is marked by
a rock which has been in contact
from which a
the 10 Indian bears. Sept 77 at 100

1874 May 20 1914 Jack Selzer
and found see of rock like

60' to 5'

CA head rock

60' to 5'

beginning north as follows

1. 100' to 150' N. 50' W. 100' to 150'

2. 100' to 150' N. 50' W. 100' to 150'

3. 100' to 150' N. 50' W. 100' to 150'

4. 100' to 150' N. 50' W. 100' to 150'

5. 100' to 150' N. 50' W. 100' to 150'

6. 100' to 150' N. 50' W. 100' to 150'

7. 100' to 150' N. 50' W. 100' to 150'

8. 100' to 150' N. 50' W. 100' to 150'

9. 100' to 150' N. 50' W. 100' to 150'

10. 100' to 150' N. 50' W. 100' to 150'

11. 100' to 150' N. 50' W. 100' to 150'

12. 100' to 150' N. 50' W. 100' to 150'

13. 100' to 150' N. 50' W. 100' to 150'

14. 100' to 150' N. 50' W. 100' to 150'

15. 100' to 150' N. 50' W. 100' to 150'

16. 100' to 150' N. 50' W. 100' to 150'

17. 100' to 150' N. 50' W. 100' to 150'

18. 100' to 150' N. 50' W. 100' to 150'

19. 100' to 150' N. 50' W. 100' to 150'

20. 100' to 150' N. 50' W. 100' to 150'

Sec 6
T 39-R 13





SURVEY # 4
TO 38 S R 14 W SEC 20

Joe M St Hamilton

Object: to obtain the amount of land South of Hamilton Store tract and track of the county road

Date June 8 1914 Last observation and

found variation to S 0 E

Henry James of Amman
McCayles

Beginning at the NW corner between Sec 20 & 21 R 14 W running South to the SE corner of Sec 20 to in deed to contain the NE corner of the S E 1/4 of Sec 20

Depositing at the Sec corner one small iron stake

1370

1370

1370

1370

1370

100 feet to east of corner.

then west to the 1370 and run 100 feet and west 20 feet and set corner at the NE corner of S E 1/4 of Sec 20
thence running North 1370 feet to the SE corner of Sec 20

SE 1/4 of Sec 20 also the NE corner of Hamilton's property since I see no wellows traced track of road

West 300 feet to NE corner of tract

" 240° " " 1/2 M "

South 444.6 " " 1/2 M " " village line

N 77 45 E 228.6 " " SE

" 2° 23 E 346.5 " " A.E. " " and way "

and place of beginning. Contains 222 Acres

Recorded June 12 1914

Survey #6 TO 40 55 P 13 W 14 N

SEC 30

For Drawings of the 5000' Co.

Object to subdivide the 35

Knowing that all corners are west

boundary of the 35 are destroyed or missing,

excepting the 20th corner, I recalculate

the 45 corner & 71st corner in following

manner.

By running it 20th corner of section

2. back to section in same and found

variance 20 25 5 July 1911

From North 816 Standard line on July 24 1911

found one

8160 Eddie Young corner

3123 Dent Lee's corner, no mark

3413 Jack's Creek

19465 William Weaver's corner

27480 " "

18450 " " " "

26720 " " " "

45427 " " " "

52400 " " " "

57415 " " " "

61416 " " " "

68465 " " " "

77435 " " " "

79420 " " " "

81400 " " " "

11138 " " " "

102418 " " " "

To A. Kearney of Sec 26

12 feet to West

Then run 50' off on true line

on west boundary Sec 26 + 35

At the 79+20 set for the corner for

corner between sections 26 & 27

by running south 26/2 feet and bearing

From which

to 30" the number 527 The N13GS. Area

d 13 30 W 17.3 feet

to 30" the number 176 The N13GS. Area

3300 E 1100 feet

to 30" the number 527 The N13GS. Area
to 30" the number 176 The N13GS. Area
to 3300 E 1100 feet

A 20' E 2400 feet

to 30" the number 527 The N13GS. Area

to 30" the number 176 The N13GS. Area

to 3300 E 1100 feet

to 30" the number 527 The N13GS. Area

to 30" the number 176 The N13GS. Area

to 30" the number 527 The N13GS. Area

to 30" the number 176 The N13GS. Area

to 3300 E 1100 feet

to 30" the number 527 The N13GS. Area

to 30" the number 176 The N13GS. Area

to 3300 E 1100 feet

to 30" the number 527 The N13GS. Area

to 30" the number 176 The N13GS. Area

to 3300 E 1100 feet

to 30" the number 527 The N13GS. Area

to 30" the number 176 The N13GS. Area


to 3300 E 1100 feet

to 30" the number 527 The N13GS. Area

to 30" the number 176 The N13GS. Area


11-15


to 30" the number 527 The N13GS. Area



11/11/11

500

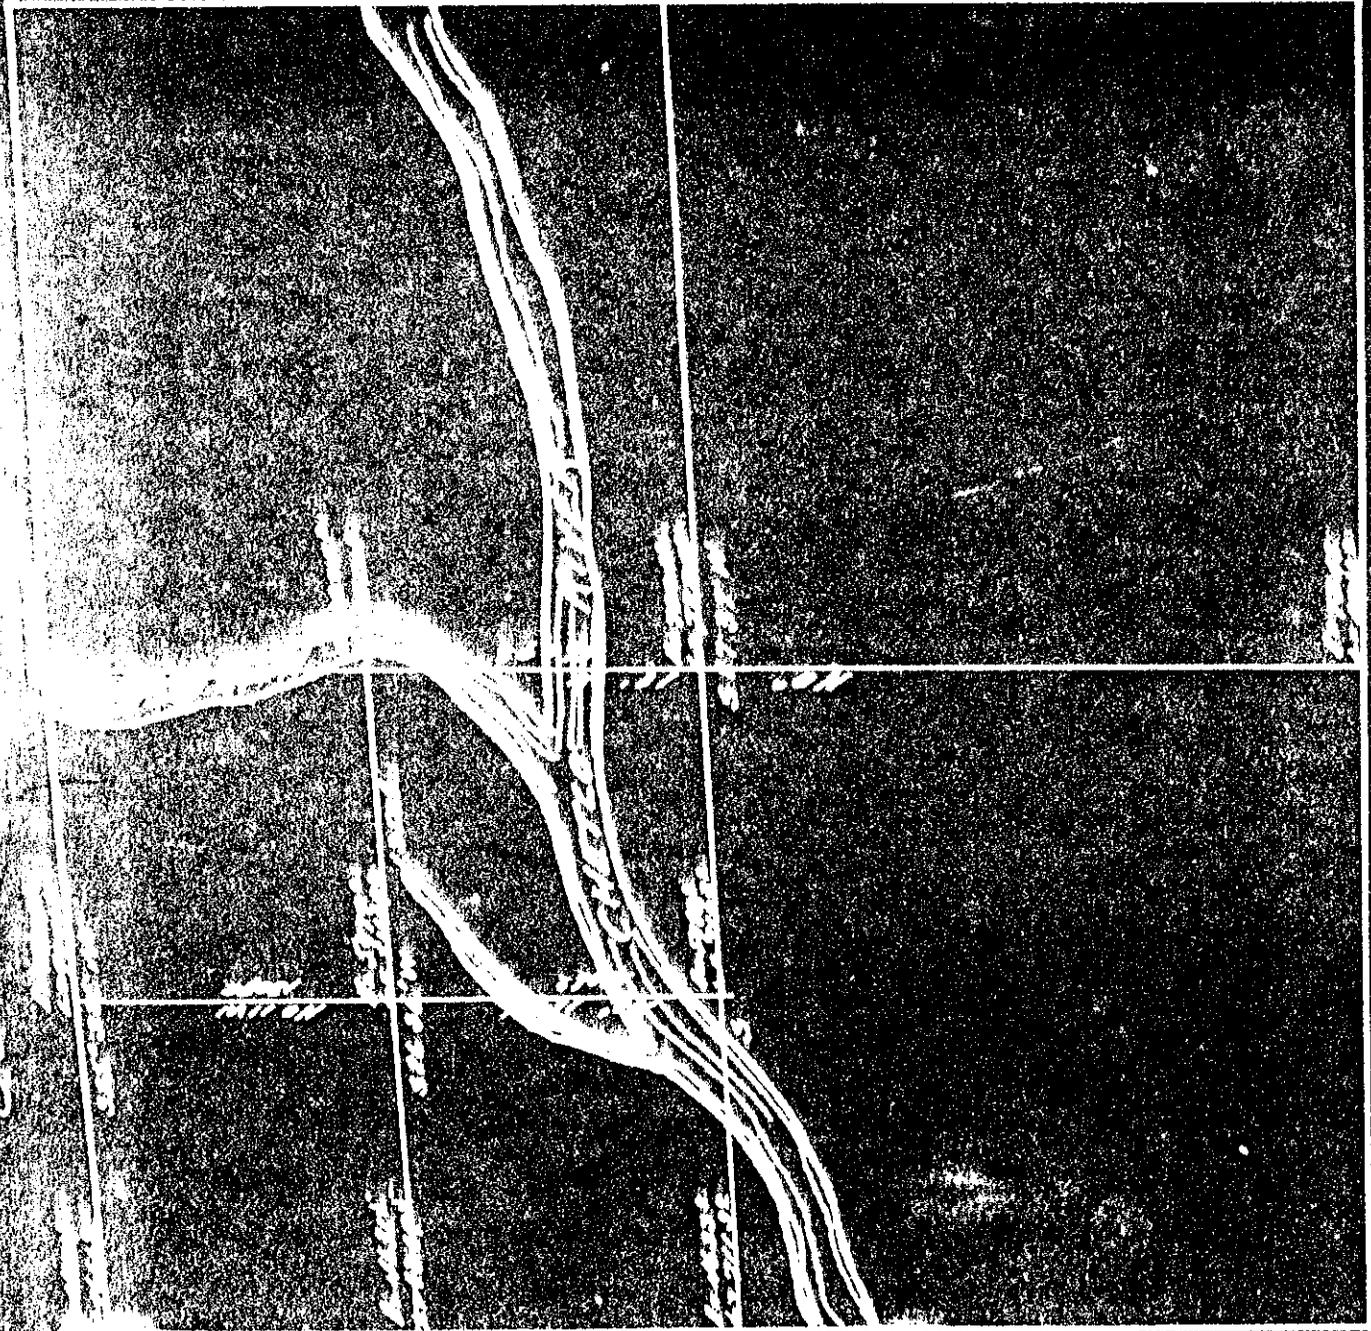



0-73 278
L- 6508



0-73 278
L- 6508



SURVEY 18

7345 R 114 Sec 15

For Row Mearns

Object To witness the exact boundary
of the D.P. # of 1620 18 T34 R 11

Var 20 30' E

Date July 11, 1914

Chas. Clark

R. H. Tracy

Beginning at the N.E. corner of Sec 15
following old witness trees West along
D. run creek, or regulating from
the corner to the opposite side
Cogue River I found the distance of
West 160

" 1750

" 1810

" 2200

" 2340

" 2647

I had corner return 35

I then run 1573.25 on line
line establishing west line

Recorded July 9.

Chas. Clark

R. H. Tracy

Survey # 9

Tp 35 SR 11 W Sec 19

For John & Elsie Fry
Great S. Survey with Lot #6 Dec 19

Var 21°

Date. Sep 18 1914
Charlotte J. Hammon
Geo. W. Hammon J. Hammon

Commencing at T. 1/4 Sec corner

bet. Secs 18 & 19 2 runs. South

1000 South 1/4 Sec cor

3000 Dec end

3000 " " 1/4 mile from

Creek bottom

Creek

Intersect center of Sec

18 is re-established by D. Camp & Hammon

then back to Sta 13 & 20 and established

at 1st corner of lot by running

with 1000 and west 83° 15' 30" N. 100 feet

to S. 1/4 S. 18. 1/4 Sec corner

then to 1/4 Sec corner 33° 15' 30" N.

then to 1/4 Sec corner 1000

then to 1/4 Sec corner

then to 1/4 Sec corner

then to 1/4 Sec corner

Recorded Sep 30 1914

W. W. Cargill
Co. Surveyor

Between Sec 24 & 25. Also Sec 25
marked as 1/4 S corner. No trees near
any bearing trees.

South thru center of Section 25
Begin at the 1/4 Sec corner between
24 & 25 as re-established by monument
and run south thru the Sec as follows

2000 South
2300 North 1/4 mile corner
2400 " " " 1/2 " "
2500 " " " 3/4 " "
3000 " " " Intersect South boundary of

Sec. 25 50 feet east of corner between
Sec 25 & 36. Placed iron witness tree
standing with 4 iron marks in and
other tree corner. Set trees witness
mark, remeasured old tree below original
marks. The tree bears about 70° feet
marked as witness tree. bears about 30°

then went to Sta 131.20. Set a post
at the corner of a 21 1/2 ft. E by morning. It
bore 23° feet and west 28° feet

the Sta 16.50. Set a mark for center
of Sec 25 by measuring in North 87° feet
and west 41° feet

Sta 201.60. Set a post for 1/4
corner of Sta 201.60. Sec 25 by
measuring in North 130° 34' and west 61° 5' feet

Survey # 12

TP 35 R 11 Sec 20

For Track Log, C.H. Simpson & Hiller
Object to Subdivide Sec 20

J.M. Cuyler	}	Lanman
Marking Log		
J.M. Cuyler	}	Lanman
C.H. Simpson		
Frank Gray	}	Lanman
Hiller		
Walter R. Ransom		

Date May 15 1915

Location 20° 45' E

Found by Loggins & Saker

Co. In, rock 47° 27'

Loc. Greenwood 18 40 34

Change 26"

Site " 0'

Refraction 42

Obs used 18444

Commencing at 1/4 Sec corner between
20 & 24 Station Sec witness trees standing
cut also dead. Set new witness

from frame which 20" cedar bears

↓ 54° 0' W 31° ft old C.H. dead.

also 24" Pine bears N 20° 00' E 43.5 ft

cut old B.T. Marks indistinct on bark

Unmarked same in wood

4" oak bears S 14 15 W 53° ft. used for

20' 10" witness tree marked, S 89. B.T.

U.S. Station run north. three sections

! Section as follows

North 4

0700

1/4 Sec on bottom 2079

5730

Remainder of 1/4 Sec ^{above}

9730

across

13720

Set Twp 14 Mer

17738

Cross Mark show best

20742

across slightly

Household tree but didn't agree with
 original field notes. I took
 bearings of each and re-established
 said corner by setting a fence
 properly marked from which

1st fire range bears $N 72^{\circ} E 33^{\circ}$ feet

original B. I.

3rd fire bears $N 86^{\circ} E 18^{\circ}$ or 18° feet

2nd fire D. I.

4th fire bears $N 87^{\circ} 20' E 33^{\circ}$ feet

1st fire 17

2nd fire 1800 $N 41^{\circ} 10' E 21^{\circ}$ feet

1100 34

10th fire bears $S 31^{\circ} 30' E 49^{\circ}$ feet

1100 D. I.

I then went back and set
 temporary 14 M fence to N° feet and
 a 2nd fire fence.

1100 to 1st fire range Dec 20

beginning at $1/4$ Sec corner between 17 & 20
 line West as follows

$0^{\circ} 59' + 37^{\circ}$ $0^{\circ} 00'$ $1/4$ Sec cor between 17 & 20

received sleep stop

12 & 20 set temp $1/4$ M Post

23 & 55 Cross Creek flow of $1/4$

26 & 58 \pm 18° feet bank of $1/4$ M

corner of Dec 20.

found 2 original ironstone trees
 and from there I established
 corner from notes and set fast

Properly marked from which
 10" Madras bears N 59 30 E 320 ft
 dist Original B.S.
 2 ft Madras bears N 22 30 W
 Original B.S.
 2 ft Myrtle bears N 25 30 E 682
 ft dist New B.S.
 40 in Fire bears S 29 57 W 710 feet
 dist New B.S.
 24" Fire bears S 39 30 E 320 feet
 dist New B.S.

South on West boundary. Also
 I think they are at 1000
 A.M. corner. The run south on
 boundary at section 100 feet.

Dist 8700 NW corner of sec 20
 6705 Spgs. small at
 5782 Spgs. small at
 13720 dist. temp 14 M feet
 located abruptly

19752 Crossed Oregon trail
 20+112 " Old
 20+56 " Train
 24+30 Bluff of Illinois
 River. There were
 7091 feet to
 To avoid
 54+06 3221 feet east of
 A.M. cor of sec 20

Survey # 17

N 89° 0' 10" E 0+00 Sta 2178 feet west

N 89° 10' E of True N. Sec Corner

Sta 262 Center of Sec 20

as established previously

Records

May 29 1915

D. H. Langley

Co. Surveyor

Survey # 13

69

TP # 355 E # 11 W NW 1/4

For Frank Fry and C. H. Dunne
subject to subdwy and certain
third party tract of land, in the
1st 20 of Dec 20

Beginning at a point 217.8
feet S 89° 10' E of 1/4 sec cor an
west boundary of sec 20 Survey
T. 54 N E 1157.0 feet following
the N boundary line of 20 x of Sec
20 thence running S 50° 07' W
1258.7 feet following general direction
of a certain street thence
N 13° 35' W 813 feet back to place of
beginning. Containing 10.5 acres

Surveyed May 21 - 1915

Witnessed by

Martin Fry & Harry
Frank Fry & Harry
C. H. Dunne

Witnessed by

May 27 - 1915
C. Dunne

Away # 14
I 55808 117077 Dec 29

Reestablishment of 1/4 Sec
corners on Hand E boundary
of Sec 29

The 1/4 Sec corner on East boundary
Sec 29
Set corner by East field mark
found on old Pine survey
Pine stump which Hank & J
indicated as original Nelson
Crew

Set first properly - marked from
which

30" Pine stump bears N 40° W 112° feet
dist original B. J.

20" Pine survey bears S 80° W 140
feet dist original B. J.

48" Fir bears N 32° E 110 feet
dist Hank & J.

30" Pine bears N 15° 10' W 116° feet
dist Hank & J.

1/4 Sec corner on West boundary
Sec 29

found original witness tree
and hole holes witness for
originally stand. Set new
posts properly marked from
which

3 ft Fir bears S 42° E 40 feet
dist B. J.

4" oak bears N 71° 00' W

137 feet dist original B. J. which
was in bad condition

So took a new air
10" oak bears West 332 feet
dist - few B.S.

Note There was a mistake
in old field notes as witness
trees were supposed to be
both oak trees, but one I
found to be a 2 ft fir.

Surveyed May 22-1910

Recorded May 24 1910

John Hughes

to Surveyor

to establish of above corner

done in presence of

Frank Fry, Martin Fry, C. W.

McGregor, Foster and Rainey

J. M. D.

Survey # 15
 Twp 20 N R 18. Range 13 W 14 N

Secs 1-2-35036

For Brinkley J & L Co
 (Agent) To Reestablish the Corner

to Secs 1-2-35036 of T 40 N

R 18 W 13 N 14 N

Found in 20" White Oak which

is identified with the ~~corner~~

original C.S. from ~~corner~~ corner shown

on ~~corner~~ new corner by

running S 77° 45' W 22 feet in

then took bearing and distance

to new corner as follows:

10" White Oak bears S 57° 30' E 20.0 feet
 West New C.S.

24" Fir bears N 59° 0' E 84.0 feet
 East New C.S.

20" White Oak bears N 78° 30' E 20.0 feet
 West with original C.S.

Surveyed June 1st 1910

Recorded June 3rd 1910

John Partridge

Co Surveyor

Certificate of recording
 Same in presence of
 Norman Taylor, Clerk of
 District, Harold Kelly and
 Trust.

JMS.

Survey #16

Secs 5 & 6 T4 N18 R13 W11 N11

by B & L Co & Out Note Co
Object) To establish the boundary
lines between two above said
Companies.

Date June 16 1915 J M Cayless &
Witness are taken Norman Tyler }
in tree - by Salor H. M. Swantz }
in presence of Am. Lumber Co
determined by a Magnetometer Salor in
in N. 1/4 Sec 5, Township 30 N
June 16 1915
Co. of 6 bearings 470 57'
Sec. 5, Township 30 N 23 - 14 - 58
47 47
Sec. 5, Township 30 N 23 20 27
in section corner + 36

Witness are taken at 23 21
The corner to Sec 5 - 6 - 7 &
by the same, established same
by the same, West 5280 feet that
to the corner to Sec 4 - 5 - 8

This corner, call not be set
by intermediate as there are
no trace of the meander corner
to the south of said corner
to the corner (5-6-7-8) & the
194" beam (type with a post 4" diam
marked as a witness to
the corner from this pipe a
3" Spruce tree bears 9033 N 942 feet

74
I then proceeded to establish
the boundaries by said property
by running 990[±] feet west and
563[±] feet north of the corner to
section 5-6-7[±] 8. This point I
marked by a 2" galvanized pipe and
set a fast 1/2" square marked M6.
on one side and B.T.C. on opposite
side for a witness to said pipe.

I then run East 2640[±] feet on line
between said Companies ⁱⁿ pipe and
set another galvanized iron pipe
with a redwood post marked same
as the other for witness. Then I then
drew pipe a nail in a 36" spruce
tree bears N 11° 17' W 266[±] feet and
I then run North 1872[±] feet and

run a line between said Companies
property and set another witness
iron pipe 134" in diameter with
a 2x4" fir post for witness. Then
this iron pipe a nail in a 4"
apple tree bears S 48° 05' E 144[±]
feet distance.

I then run N 48° 54¹/₂' E 1711[±] feet
and set a line between
said Companies property and
set a 2" galvanized iron pipe
with a post 4x4 for witness.
I then run East 360[±] feet to
bank of the Chetco River.

These ~~are~~ described lines marks
the boundaries of said property

Surveyed June 16 & 17 1915

Dr. Cayler

Recorded June 30 1915

J. W. Crayford

1/4 S. 13 W. 1/4 NW

Deed 576

For B. T. Co.

To establish the true line between sections 576.

June 18-1915

Same crew as in Survey # 16

" Meridian as in " " 16.

I first determined true bearing of line in following manner. There being a certain place between the N.E. & D.E. corners of Sec 6 from which I could see the both the above corners at the same time I set my instrument on true line between said corners by E. H. until fore and back sight hit these corners at same time. By this I found the true bearing of this line to be

$N 00^{\circ} 32' W$

I then began at the corner to section 576-778 as reestablished in Survey # 16 and run $N 00^{\circ} 32' W$ as follows

$N 00^{\circ} 32' W$ 0+00 Corner to Sec 5-6-7+8

" 9+74 $\frac{1}{2}$ of Road

" 10+35 Fence

" 10+64 "

" 11+86 $\frac{25}{5}$ Approximate $\frac{1}{2}$ B.F.R.

" 18+69 $\frac{0}{2}$ " $\frac{1}{2}$ Whites Ave

" 22+05 " $\frac{1}{2}$ Gales "

" 25+84 Fence

" 29+17 Approx $\frac{1}{2}$ Jackson Ave

" 32+20 True Fence Jay

to 32 W 44+44 Small stream

" " 47+88 Old Road

" " 54+85² Corner to Sec 5-6-31032

work is a feet properly marked beside
a ^{new} fence just 1 ft square.

I have found the true location
of the $\frac{1}{4}$ section corner between
Sections 5+6 to be at Station

26+658 (Figuring by proportional
distance) I need checked iron

corner by setting an iron pipe
2' in diameter at Sta 26+658 on
true line between section corner
and set a level and set beside
iron pipe for witness to corner.

The south corner of the corner
found at corner of the road corner
bears N 190° 15' W 87.52 feet distance
from the iron pipe

Recorded June 30 1915

J. W. Langhans

Co. Surveyors

I.H. 41 S.R. # 103 W.W.M.

Section 5

For B. J. & S. Co

Object) To establish the N.W. corner of Hamilton Land Claim # 37, also a point on the east boundary of said claim directly west of $\frac{1}{4}$ Sec corner between Sec 5 & 6, and the intersection of said D.A.C. with the section line between Section 5 & 6

Begin at the $\frac{1}{4}$ Sec corner between Section 5 & 6 as established in Survey # 17 and run due north 500.00 feet to the west boundary of said D.A.C. # 37, then to the $\frac{1}{4}$ Sec corner above a yellowed iron pipe which is in contact to mark said point. From same point set 21 feet to station A.P. 1. Then run due north 397.00 feet to station wire striking said line at station # 30731. This verified by wire to be correct. At this point I drew another line to mark intersection of said D.A.C. # 37 with section line

Surveyed June 19 - 1910
 James Brown and same
 Surveyor as in Survey # 16

Records June 30 1910
 J. P. Coughlin
 County Surveyor

Survey # 19
Twp # 38 S R # 14 W N.M.

Section 18717
For Wm Walker, Arthur Walker, Geo Emery
and Geo Henry
Subject to establish the section
line between sections 17 & 18, and
to establish the E & W line betw
the center of the 1/2 of section
18

Date June 23 1915
J. H. Sullivan }
Geo Emery }
Geo Henry }
W Walker }
Geo Emery }
Geo Henry }

#1 Establishment of section line
between sections 17 & 18.

Beginning at the corner to
sections 7-8-17-18 from which
a 30" iron nail is 77° W 105' bet line
of the original bearing line
The witness Jack being born
a sub a new fence was run
its place which was a slight
part 4" square. It has run
in a south course as follows

- South 0+00 Corner to sec 18
- 0+60 Int. angle corner
- 2+07 West corner
- 6+20 Level
- 7+70 Descend
- 13+20 Net temp 1/4 mile from
- 13+45 Creek at Geo Emery's corner
- 14+91 Descend

South 25710 Summit of Kears Road
 31748 County Road
 " 35733 " "
 " 37764 Trench
 51798 18 feet west of corner

to sections 17-18-19-20

I then went back and established the 1/4 Δ 3/4 mile facts as follows:

The 1/4 mile fact (which is the S.E. corner of h E E of sec 18 of Dec 18) I set by moving the temporary fact North 20.5 feet and east 42 feet and set a fir post 4' x 4' from which a 5th spruce tree bears S 61° W 61° feet dist.

I next established the 3/4 mile fact, which is the S E corner of the NE Δ of the S E Δ of sec 18, by moving the temporary fact North 61.5 feet and east 132.5 feet ~~from the same position as this fact~~

came in the center of the County road I set it 10° feet farther north making it 388.5 feet and an a true line from the h E cor of sec 18 a 3ft spruce tree bears N 59° 00' E 56° feet with frame post. (This post being 16° North of true corner)

2 Establishments of E and N line

True center of A Δ of section 18.

Beginning at the S E corner of the NE Δ of Dec 18 as established by me in first part of this survey, I ran a right angle to section line which is S 89° 45' W. I run west on this

course for a distance of 26 19° feet which took me on the sand beach of the Ocean. I then ran on a true North course to the 1/4 Sec corner

between Sections 7 & 18. I found
this distance to be 13123 feet.

As the ^W corner to 7-18 was rotten
and decayed I reestablished same
by setting driving a gum barrel for
corner and setting a Redwood ^{post} ^{marked} properly
marked beside it as a witness. Here
were no trees near for witness

I figured by latitude and by true
that the line between Sections 17 & 18
ran N 89° 55' W and the distance was
being 26143 feet. As there was no
marked corner between Sec 18 & 17
no means of determining
the true bearing of that line. I
took the bearing and distance of
the N boundary of Section 18 as
described above as a true bearing
and approximately distance to
reestablish my E & N line from
the N of Sec 18. I therefore
began anew at the SE corner of
the NE 1/4 of Sec 18 and ran
N 89° 55' W on a true line as follows

N 89° 55' W 0+00

" " 0+60

Rt 25

57045

6+528

" "

13+096

(SE corner of NE 1/4 of Sec 18)
Established in July 29 Aug 2 1918
Cross Creek and began recording

Top of hill run slightly down

Approximate E of Camp, Cal

Set and true line with witness
post for 1/8 mile just

Drave 3/4" drift both

with witness post for 1/4 mile
post from which an 8" well
Gum tree bears S 25° 10' E

130 feet dist.

23725! Bone in Saw cut
in bank of Pacific Ocean from which
the extreme west face of a rock
28 feet in circumference in the
south bank of the second small
stream) bears S 1/3 20' W 137 \pm feet
distance

Recorded
July, 1910
J. H. Carver
S. Burbage

Survey # 20
Op 385 08 14 11 PM

Dec 17 & 20
For Tom Walker & Ed Lawrence
(Chick) To establish the line between
Sections 17 & 20 from the 1/4 sec
corner between sections 17 & 20, east
to the section corner common to
secs. 16-17-20 & 21.

McCaughy Tanner
Ed Sutton
McCaughy Tanner
Ed Lawrence
Tom Walker

Date June 26-1915

Beginning at the 1/4 sec
and run east as follows

- 0+00 1/4 sec corner between sec 17 & 20
second hill
 - 10+44 Summit of hill. second tile from
 - 13+20 set ^{10 1/2} 1/4 mile from
 - 26+118 Archite, section corner.
- The witness fast to the corner is a
chittum post and is in good condition
and is witnessed by a 2" dia iron
which bears to 50° or W 66° feet less.

I then went back a distance the
1/4 mile fast by measuring the 13+20
fast ~~total~~ 52' feet and West 14' feet.
I drove an iron rod at this point and
witnessed it by a red wood stake (for the
1/4 1/4 corner) to 36" fished in tree near
N 19° 20' W. 1794' feet dist from corner
Recorded July 1 1915
J. H. Hughes

Survey # 21
Twp 38 S R 14 W N M

Dec 16, 17, 809
For Am Walker, Geo Lawrence and
Banking Timber & L Co.
Sheet 1 To establish the section
line between 16 & 17 and 809

Date Aug 6-7-8-9 & 10 J M Hughes Transit
Geo Jack Star }
J M Hughes }
Am Walker }
Kidney " }
Elyas Ruyton }
Amur }

Took an observation on sun to find
the true meridian on Aug 6, using the
following declination and latitude

Co Lat of Place 47° 43'
Dec at Greenwich zone 16° 56' 25"
Diff for 1 hr 40.75" 7
Diff " " " 7
Reduction 7
Dec used 16° 50' - 35'

Beginning at corner to section 16-17-
20 & 21 and run north as follows

- 1000 North
- 8154 Summit of ridge ascended
- 13120 Set township 1/2 mile from
- 23700 Cross Creek ascended
- 26140 Set township 1/2 mile from
- 31770 Summit of ridge and follow same
- 41400 Descend
- 47725 Cross main Creek ascended
- 52780 Set township 1 mile from

58+60 North Cross Cut flaws rocky
79+20 South side located
81+50 Ash trap 1/4 mile from
84+20 Cross ridge descend
100+45 On rocky point
100+80² Cross Creek - branch of Myer's
115² feet to east of corner
to sections 4-5-809.

I found 2 waterless trees to the
corner but fast gone. I re-established
them by setting a few feet from which
a 3 ft maple tree bears N 63° W 100 feet (west)
" 4" Fir " " " 67° W 30 ft (east)
" 4 in Jun oak " " " 60° 30' 172 ft NW-NE

I then went back and set new
corners as follows.
at Sta 13+20 I measured in both
82 feet and west 146 feet and drove in
iron nail for corner from which
a 4 1/2 in fir bears N 90° 15' E 122 3/4 ft
a 2 1/2 in fir bears S 34° E 20'.

I next moved station 26+40 5 feet
north and 295 feet west and drove a
chickens foot brakerley marked
for the sec corner. Below station
No 17 I ran which a
chick station bears N 85° E 90 feet
12" Jun oak " " N 78° W 145

I then moved station 52+50
10 feet north and 571 feet west
for corner to sections 8-9-16 & 17

and trace an oak post with a
 mound of stones for corner from
 which a

2 ft Oak bears N 31°-E 48° feet dist
 9 inch. tangent " 5 27°-E 17° " "
 8 " " " 5 81°-W 13° " "
 5 foot Fir " N 84°-W 115° " "

When went to sta 79+20 and
 measured it 153 feet north and
 802 feet west and arose a post
 probably marked for 1/4 section corner
 between sections 8 & 9 from which
 a 7 inch tan oak bears N 35°-W 39°
 " 8 " " " " N 54°-E 104° "

Recorded Aug 30 - 1915

John C. Anderson
 Co. Surveyor

Survey #22

T. 26 S. R. 15 N. W. 11

For F. H. Blyke,

See 36

which I so established $\frac{1}{4}$ Sec
corner between Sec 31 & 36

Beginning at the Surf corner
to S. 36 & 37 S Range $\frac{1}{4}$ & 15 W
from which a cherry tree 8" in diam
bears S 61° - W 63° ft. dist. Thence
running north to the meander
corner on South bank of Rogue
River. I found this line to
bear N 6° $1\frac{1}{2}'$ E 45.285 feet.

Then came back and set $\frac{1}{4}$ Sec

corner on true line 2599 $\frac{1}{2}$ feet
from Township corner. To the

$\frac{1}{4}$ Sec corner I set an iron

bar 3" square 2 feet in ground

from which a myrtle 6" diam bears

N 12° W 42.8 feet dist and a spruce

tree 38" diam bears N 13° - E 114
feet dist.

Barrence Caughey
Barrence Caughey

April 1st 1916

J. McLaughlin
Co. Surveyor

Survey Map T. 38 S. R. 14 W.

Surveyed for Neil & Arthur Walker
May 10th 1917.

This is a meander of the country
road, which is the line between between
the above said parties, to determine the
amount of land owned by each.

By being cloudy the entire time of
the survey, no solar observation was
possible!

It begins at the S.W. Cor. of sec. 17,
thence as follows:

Var. of needle $20^{\circ}34'8''$
to E. road.
following Co. road.

No. 1	E		5.93 chs.
2	N 44°	0' W	2.68 "
3	N 20	8 W	1.16 "
4	N 48	30 W	2.21 "
5	N 84	15 W	1.43 "
6	N 25	55 W	2.58 "
7	N 18	56 W	1.72 "
8	N 54	0 W	2.38 "
9	N 10	28 W	1.16 "
10	N 24	0 E	2.13 "
11	N 19	30 E	3.57 "
12	N 14	30 E	3.42 "
13	N 13	15 E	1.42 "
14	N 19	0 W	2.55 "
15	N 0	20 E	1.24 "
16	N 19	48 E	2.00 "
17	N 16	0 W	1.95 "
18	N 42	0 E	2.04 "
19	N 34	0 W	.67 "
20	N 89	30 W	1.53 "
21	N 57	40 W	3.12 "



89

22 N20	55 W	7.78"
23 N 4	5 W	4.76"
24 N15	55 E	2.04"
25 N55	35 E	2.12"
26 N20	30 E	2.10"
27 N20	56 W	2.46"
28 N40	50 W	2.22"
29 N23	30 W	3.17"

30 N31 10 W 2.87". This last number comes
12,000 obs. E. of N.W. cor. to the S.E. 1/4 of the N.E. 1/4
of Sec. 18 T. 38 S. R. 14 W.

Recorded Jan. 4th 1918.

R. J. Garfield
Co. Surveyor.

Survey No. 2 T. 35 S. R. 12 W.

Surveyed for Ralph Edgerton
and his father, Sept. 12th 1917.

To establish center line E. & W.
through Sec. 12.

Weather cloudy and no possible show
for an observation of the sun.

Began at 114 con. on E. ldy. of Sec. 12
thence as follows: Run of the north 25° 30' E.

West on random line, 100
20.00 chs. Set temp 114 1/4 con.
40.00 " " " 114 " "
82.12 " (cont 47 lbs S of 114 con. on
W. ldy.)

From run S 89° 40' E on true line,
41.06 chs. Set Con. to 12th section
from 4th. 19th 4 ft. long. Minimum in ground
marked 114 S. from which,
A Madrone 16 ins. in diam. bears S 86 E 39
dist. Marked 114 S B.T. A madrone
bears S 5 1/2° W 45 lbs dist. marked 114 S B.T.
61.59 lbs. Set 114 1/4 con. A post 4 ft. long
4 ft. long. Minimum in the ground, marked
114 1/4 con. from which,
A madrone 24 ins. in diam. bears
N. 10° W 38 lbs dist. marked 114 1/4 S
B.T.

Recorded Jan. 4th 1918

R. J. Canfield
Co. Surveyor

9

Sec. 12 T. 55 S. R. 12 W.

1/4 Cor.

58° 40' E 82.12 chs. Cen. of Section.

1/4 Cor.

1/4 Cor.

20.53 chs.

41.06 chs.

Scale, 8 ins. = 1 mile.

Survey No. 3. T. 36 S. R. 15 W.

Surveyed for State of Oregon
Oct. 3d. 1917.

This is to establish a dead line to control fishing, near the mouth of Hayes' Run at Doyle's Rock, said line to be parallel to the township line on the west boundary of T. 36 S. R. 14 N.

Having previously determined the direction of said township line, which is found to be S. 1° E. with the variation of the north at 20' 30" East the bearing in line with summit of Doyle's Rock, and at a long distance by the spirit level, for a number of feet on the hill on the west side of Hayes' Run, when also set a flag in the summit of the south side of Hayes' Run, 1/2 E. of flag on north side. The line of passage through the summit of Doyle's Rock.

Recorded Jan. 24 1918.
R. J. Conquest
Co. Surveyor.

Survey No. 4 T. 35 S. R. 11 W.

Surveyed for Ed. Miller Dec. 30th
1917.

This is to survey out 2 acres, and more
the same on the ground, and get a des-
cription for a deed. Said 2 acres
Henry where his house stands.

Beginning at the N. E. cor. of said
lot, which is an iron pin driven in
the ground, and from which a Sargent
Oak tree 24 ins. in diam. bears N. 52° E
5 links dist., marked N. E. Cor.

Thence S 54° 30' W 6.68 chs. to the N. W.
Cor., from which a Myrtle tree 20 ins.
in diam. bears N. 65° 50' E. 27 lks. dist.
marked N. W. Cor. Thence S 35° E 3.00
chains, to the S. W. Cor.; Thence N 54° 30' E
6.68 chs. to S E Cor.; Thence N 35° W
3.00 chs. to place of beginning containing
2 acres. All in lot Sec. 18, T 35
S R 11 W.

Recorded Jan. 4th 1918
R. J. Canfield.
Co. Surveyor.

V. R. Stannard.

Geo. D. Wood.

W. A. Wood.

West boundary of SW^{1/4} of SW^{1/4} of Sec. 31.

West boundary of SW^{1/4} of SW^{1/4} of Sec. 31.

3.00 chs.

2.92 chs.

Fence,



F. J. Schliemann.

SW^{1/4} of SW^{1/4} Sec. 31 T. 36 S. R. 14 W.

Scale, 1 inch = 50 feet.



WN 8.00 chs. beaver swamp.

" 10.89 " come to Stannard's S. fence.

" 13.58 " come to fence between Stannard and Geo. D. Wood.

" 16.58 " come to fence between Geo. D. and W. A. Wood.

" 19.50 " come to fence at W. A. Wood's N line.

" 19.77 " 1/4 1/4 cor.

" 39.54 " Do 1/4 cor. on W. bdy. of sec. 31.

East end of J. R. Stannard's south fence is 8 feet east of true line.

East end of Stannard's north fence is 11 feet east of true line.

East end of Geo. D. Wood's south fence is 9 feet east of true line.

East end of Geo. D. Wood's north fence, and W. A. Wood's south fence is 15 feet and 8 inches east of true line.

East end of W. A. Wood's north fence is 20 1/2 feet east of true line.

Preliminary to making this survey
p. on the 31 day of July 1918 took an
observation of the sun, at a point 15 feet N.W.
of the S.W. cor. of T 36 S. R. 14 W. and found
the variation of the needle to be 20° 30' E.

Sun's Declination 22° 58' North. at 3 p.m.

Co. latitude 41° 29'

Refraction 24"

8.3 hours west.

Sun's altitude 65° 15'

Recorded October 5th 1918.

R. J. Canfield.

Co. Surveyor.

Survey No. 6 T. 31 S. R. 15 W.

Surveyed for Cumy County
July 17th-21st 1918.

The N.W. cor. of Sec. 15 not being legally established, and the $\frac{1}{4}$ cor. on the W. bdy. of Sec. 10 being in the same condition, it is necessary for me to establish those two corners in order to locate the terminal point of the survey and also to determine the divisional lines on said survey, that is the Denmark Road survey.

Begin at $\frac{1}{4}$ Cor. on N. bdy. of Sec. 15 which is a concrete monument 5 ins. square placed in the ground, Thence West

Var of the needle $21^{\circ} 30' E$
20.00 chs. set Temp $\frac{1}{4}$ Cor.

40.00 " " " Stake for Sec. Cor.

80.00 " Pretenseet $\frac{1}{4}$ line 35 lks. S. of $\frac{1}{4}$ Cor. on S bdy. of Sec. 9. Therefore the true line bet. the $\frac{1}{4}$ Sec. corners on the

S boundaries of Secs. 9 & 10, bears $N 89^{\circ} 45' 24''$.
I now go back and remove Temp stake for Sec. cor. $N 17\frac{1}{2} lks.$ on true E & W line.

I now go to N.W. Cor. of Sec. 10 Thence S

Var $21^{\circ} 30' E$

40.00 chs. set Temp. $\frac{1}{4}$ cor.

80.12 " Coms 80 lks E of my Temp. stake for Sec. cor.

I now go to S.W. Cor. of Sec. 15 Thence N
Var $20^{\circ} 30' E$

80.00 chs. coms 70 lks. E of my Temp. der. cor. Therefore if I had continued S with a Var. of $21^{\circ} 30' E$ I would have come 150 lks. E of SW cor. of Sec. 15.
The true line bet. the NW cor. of Sec. 10

and the SW cor. of Sec. 15 is therefore S 32° W.
I now remove the Temp. sec. cor. 5 1/2' E to
its true position, which makes the distance
bet. the 1/4 cor. on N. bdy. of Sec. 15 and
the N.W. cor. of 15 to be 39.95 chs.

I establish the N.W. cor. of Sec. 15 by
placing a piece of sand stone containing
about 2000 cubic inches, 2 ft. in the
ground with 6 ins. above ground, marked
with a cross on top and "N.W. Cor." on the
S.E. face, from which,
A spruce 4 ft. in diam. bears N 59°
40' W 1.78 chs. dist. marked CS S9731S
R. 15 W.

Also a spruce tree 3 ft. in diam. formerly
marked by Dennis Cunniff, Co. Surveyor,
bears N 29° 40' W 1.25 chs.

From N.W. cor. Sec. 15 I now run N 32° E
40.06 chs. and establish the 1/4 cor. on N. bdy.
of Sec. 10, by driving an iron pipe 30 ins.
long and 1 inch in diam. into the ground.
This is a difficult country to survey in
on account of local attraction.

At N.W. cor. of Sec. 15 I find van. of
the needle to be 20° 50' E. Affected by local
attraction.

N 20° 32' Dec. at 3 o'clock p.m. July 21st 1918

Refraction 36"

8.3 hours W. of Green.

Co. beat. 49° 1'

Suns alt. 48°

Recorded Oct. 8th 1918.

R. J. Caulfield
Co. Surveyor

100

T 36 R 14 W

Survey from Highway to line lines of NW 1/4
of SE 1/4 Sec 4 T 36 R 14 W. W.M.
I begin at 1/4 cor Sec 4-5 marked by
a post - properly measured, with stone monument
thence

E

4000 Resurvey to Sec 10 1/4

4100 Section 10 New survey closing line

6000 Set T 1/4 1/4 line bottom

8000 Accented lines can line no trace of 1/4 cor Sec 3-4

I run S to cor Sec 3-4-9-10

4000 Can find no trace of cor
D Thence

S

2400 Creek 10 W.M.

W

4000 can find no trace of 1/4 cor

8000 Entrance cor Sec 4-5-8-9 2.20 S

I run to T 1/4 Sec 3-4 stone

N

4000 Entrance cor Sec 3-4-33-34 173 S

I ~~run~~ calculate connection and

find T 1/4 1.15 N T 056

I return to T 1/4 1/4 center 1/4 1/4 6 1/2 Sec 3

and establish by setting S, 89 T W, 03 curve

Set for limb stake property 74 marked from where
an alder 8" B N 65 W, 31

I establish center 1/4 Sec 4 by setting, 44
S T, 02 W, setting self angle of 24" 3" long
from which

an oak 9" N 30 W Dist - 28

a fir 8" N 20 E " 28

I run S, from 1/4 1/4 N center 56 1/4 S 200

Set exact point center 3' long No. 10

I run S from 1/4 cor 2000 set corner stake
from which

a fir 24" B S 42 E '09

" " 36" N 80 W '48-

Transition employment 2100

T 36 R 14 W

Revised March 26 1920
D. O. Summitt

Survey for Macley Estate Co + School
Lot No 4 Curry Co

Survey of tract for School House and
and School grounds

Lot is situated on the right bank
of what is known as School Creek, on the
Right Bank of Rogue River in the N.E.
1/4 of S.E. 1/4 of Sec 36 T 35 S. R. 14 W. N. M.

more particularly described as follows to wit
Beginning at an iron pin found with
a fir 11" dia 73 N 21° 0' E 100'

thence

S 33' 00" E	716' 00"
N 57' 00" E	208' 00"
N 33' 00" W on "	200' 00"

thence along S.E. side of Co. Road to place of beginning

containing 175 acres more or less

Recorded Dec 15 1920

D. O. Summitt
C. S.

T 33 R 15 W

Survey for Woodys of Gullings
Began Survey Aug 31 1920 using lines
with Salgo, J Wilcox and J Lane
Chairman

Begin at N.E. Cor. Sec 5 T 33 R 15 W
W.M.

Thence

33.42 Set T cor for lot

38.89 Intersect MC 2.5 N 11 W

I return to T cor of lot and connect by setting
proportional distance N T W

I begin at corner N E cor of lot Thence

S 40.00 Set T S E cor of lot Thence

W 6.56 Set T cor 1/4. I fine T pins on three sides

" 46.58 Set T 1/4 cor Sec 5-6, I fine position of
this corner

I take bearing as W 8 pins with one
fine remains of line which I identify
as one of the original witness trees

I fine line coming to intersect
line cor. 25 N T 0.6 E

I connect 1/4 cor Sec 5 setting proportional
distance N T E

I now go to S W cor Sec 5 Thence

N 20.00

" 36.00

39.90

Set T 1/4 1/4

Set T 1/2 1/4 1/4

Intersect 1/4 Cor 5-6 34 E

I return to 1/2 1/4 1/4 dividing E T W the
N 20 1/4 S W 1/4 Sec 5 and connect by setting
proportional distance S T E

I ~~connect~~ now go to corner 1/4 Cor Sec
5 Thence

S 9.99

Set Cor E side being N W 1/4 S W 1/4 Sec
5 from which a pin 4" dia is S 54 1/2 E
12

Recon on Aug 30 1920

W. C. Smith

Jan

42 44

Mar

17 25

Apr

20 21

NW 78th Sington and others in Sec 34 T 39 R 14 W 2 N

After finding the original position of the Government Corners I first at 1/4 cor Sec 27-34 thence

S 1° 30' W	2000	Set T 1/4 1/4	Cor
" "	4000	" Center 1/4	"
" "	6000	" " 1/4 1/4	"
" "	7420	Intersect 1/4	Cor 34-3 T S

39-40, 65th W with makes short - ag in Sec 5, 80 and line course through Sec 18 1° 59' W bearing each but 18,55 in lat

I return to T Cor and correct setting equal distance and on line line between the 1/4 Cor on NTS line

1/4 Cor Cen of Sec established and removed to for Cor as by law provided

1/4 1/4 cor. Cen N 1/2 of Sec Clear post - 4x4x4 long from which an elder 2 1/2 18 N 33° 30' 90'

I run go to 1/4 1/4 Cor SW 1/2 of 34 T 39 R 14 W 2 N which is a stone 12" long from which a Spruce 1 1/2" dia 18 578 & 226

I have found by means of new the 1/4 1/4 of sec as 1/2. Wire

N 1° 59' E	18,55	Set 1/4 1/4 Cen SW 1/4 from	107
" "	18	Spruce 1 1/2" dia N 83° E NW	

S 88° 30' E	2005	Intersect 1/4 Center Cor, 50 S	
-------------	------	--------------------------------	--

Then I did not see sufficient evidence from a line line cross that

The N & S lines were parallel emergence
distance from the S line of the sea
I make no correction

Survey finished March 29 1921
Instrument used W T & Gurley
Compass with T. Burt Solar attach
-Index-

4209
31649
2033

Let employee
Due Greenwich line March 29
May bar
Chains

Colgrove
Colgrove

Reconnaissance April 4 1921

D. F. Smith
D.F.S.

5/12/21
15/2/21

T 40 R 14 DE

Survey for J Rea & Mr Warrick
 began survey April 1921 at Cor Sec
 6-7-1-12 T^{SD} 40 13-14 W RSM Thence

or 2000 set T 1/4 1/4 Cor
 " 4000 " " 1/4 1/4 Cor
 " 6000 " " 1/4 1/4 " "
 " 7801 Intersect Cor 39-40 13 W 167 or
 2018' C

2 return to T 1/4 and establish
 Cor on line line between T Cor
 39-40 13 W T Cor 6-7-1-12
 T 40-13 W and 4000 N of the
 initial point. See C-7-1-12
 as per instruction from U S

Survey on ground
 Instructions see H. T. & G. G. G. G.
 Composed with Herb Solar

Laborer employees 42,071
 426
 2030

Here
 from
 S Jordan D Bennett's
 Chas D Warrick
 Recorder G. G. G. 8, 1921

Survey for James Hughes

T 32 S R 15 W T 11 M

I begin survey at Cor to Sec 7-18-12-13 T 15 S 15

T 16 20 24

E 2600 set T 1/4 1/4 Cor

4000 " " 1/4 Con fine re trace Cor or Bony tree

6000 " " 1/4 1/4 "

8000 Con fine 16 lines of con position has been sup. by fire

I return to 1/4 1/4 6 1/2 Sec. 12-13 Thence

N 2600 set T 1/4 1/4 Thence

W 4000 " T 1/4 1/4 Center of SW 1/4 Thence

S 1905 intersect 1/4 1/4 Cor 7 1/2 Sec 7-12 do W

I am satisfied my Chainmen work and

like of 1000 ch with Chainy N or S but it was

Cor Lot to return over corner

Roy Davis } Chainmen

Rellock }

J. G. Griffiths

Survey of ...

Line between N 1/4 14 and S 1/4 14 ...

Sec 28 T 35 R 14 W 1/4

Having bearings that the 1/4 cor Sec 27-28 is actually 90° ...

The survey of 90° (in accordance with instructions of U.S. Surveyor General) to corner 27-28-33-34 which is on by stakes and stone measure ...

Princ. Line

4000 Set T 1/4 Cor from bearing of Cor

80.00 " " " " " "

2000 Set T 1/4 Cor intersect 1/4 Cor 1.00

Return on ...

2900 Set 1/4 Cor 28-33 - Line

4000 Set T Center 1/4

3971 1/4 Cor Sec 21-28 2.25 E

3 Corner Center by Set Line Cor, 14 Rk and 112 Cho of T Cor

2900 Set 1/4 Cor 27-28 - Line

3971 3972 Cho entrance Correction Cor 1/2 N

2900 Set T 1/4 1/4 Cor Belong Center 1/4

and 1/4 27-28 and establish Seting T 1/4 Cho E ...

Seting Cedar post 4' x 4" 3' long ...

marked for 40° Dia 78 N 60° E 84

2900 Set T 1/4 1/4 Cor set approx cho of 1/4 Cor 21-28 ...



S of T cor

Ct Beary }
W Miller } Chamun

Instruments used for the survey
Compass with Burt. Great altch

Lat-

19th May 11

20th May

42° 33' "

8 13 6 2

20 07

Survey finished April 18 1921

Revised April 21 1921

W E. Jennings

T 35-14-17-14

Survey for Lawrence Miller and Thos

T 35-14-17-14

Began Survey Aug 6 at morning 78 +
L. G. Guley Compeas with Bert Soler
attaches. Hills Miller + Miller
Moore Chairman

Commenced at Cor 8-9-16-17 Thone



- E 2000 bet T 1/4 1/4
- S 4095 entrance 1/4 Cor 9-16 26 S
- E 2000 bet T 1/4 1/4 on N 1/2 Sec
- S 2000 " " " NE 1/4 "
- W 2000 " " " E 1/2 "
- W 2000 " " 1/4 " of Sec

By request of owners of premises Lawrence
Miller + William Moore & return to
1/4 1/4 Cor on line of W 1/2 Sec 9-10 first
course and from T 1/4 1/4, 12 1/2 Chs S on line
line between Cor Sec 8-9-16-17 and 1/4 Cor
Sec 9-16 T 35-14-17

Lat 42° 33"

Lawrence Aug 17-21

L. G. Guley

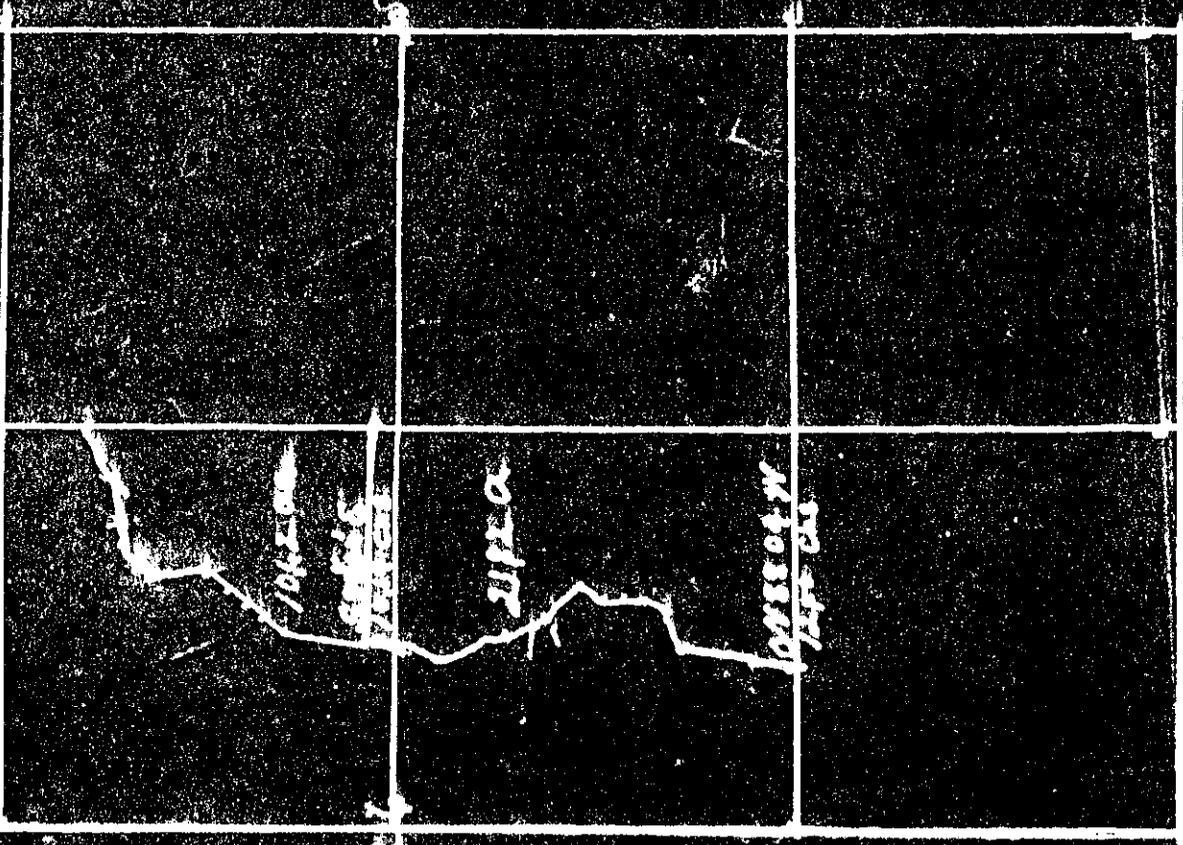



NY

R157W 111

Gravel for the thickness of 8' 0" above

Begin Survey Station 1909
with early compass with 180° open circuit

Begin at 1/4 1/4 Cor Center of C 1/8 of Sec 26 T 20 R 15 or see line 26-35 of St. 1909
Set T 1/4 1/4, 36.00 Set value at center of old road 40.00 Set T 1/4 1/4 center of C 1/4 Cor Center of T 1/4 1/4 Center of N 6 1/4 79.73 in line 1/4 1/4 center of S 1/2 Sec 26-23
1/4 1/4 Center C 1/4 Sec 26-26 in a corner from which

A corner 15" 18 N 53° E Dist- 67
A corner 4" 5 7 E
Corner 1/4 1/4 Center of N 6 1/4 of Sec 26 falling in the present corner of Road & set
Station Cor, 25.75 is corner stake with
iron pin 1" dia. from which
a pin 60" dia. 78 S 29.80 E Dist- 48

1/4 1/4 Cor Center of S 1/2 1/4 in corner stake from N corner
corner 16" dia. 18 N 30° E Dist- 27
No. 1909 Measure at 1/4 1/4 Cor Center S 1/2 1/4
No. Sec 26 T 20 R 15 N 1/4

No. Corner	Dist	Angle	Measure	at 1/4 1/4 Cor Center S 1/2 1/4
1	1200			Center of Wagon Road 1909
2	N 8° E	200		
3	N 16° E	300		
4	N 15 00 E	100		
5	N 8 30 E	200		
6	N 76 45 W	100		
7	N 24 15 W	300		
8	N 21 00 W	100		
9	N 3 30 W	200		
10	N 8 30 W	200		
11	S 2 30 E	150		
12	N 30 E	400		
13	N 31 30 E	100		
14	N 48 45 E	100		
15	N 30 30 E	100		
16	N 38 30 E	100		
17	N 1 45 W	250		
18	N 2 40 E	100		

- 19 14430 C
- 20 1476 C
- 21 15550 C
- 22 16645 C 200
- 23 16237 C 100
- 24 15030 C 100
- 25 1508 C 150
- 26 1556 C 124
- 27 5 36.66

23, 44 acres of logging Company
 2

No. 11 Corner of 21.82 acres of gas Co. Station
 No. 11 Corner S 98 04 8 E - 1019 6'

A Joint - 1.88 N of Corner to 1/4 1/4 Cor. Cen
 of each 1/2 of Sec 26 which is a Cor.
 Stake found which
 on clear 1/2 965 W

on clear 1/2 130 W

Reconnaissance 10 21
 No 2 7 30 R 15 Survey

Survey for the Colli. Measure line
 Set 1/4 S 70 1/2 E 70 78 15-78-78 W

Begin at Cor. Sec 26 - 27 - 38 - 39 then
 N 89 30 E 2000 Set T 1/4 1/4

39 68 Entrance - 1/4 Cor 26 - 35, 20 N
 of relative to T 1/4 1/4 on a solid line set
 on foundation corner equal distance in
 Set by stake with gas pipe from which
 or Measure 9" 18 N 21 15-78

29 gas Co - Cor 26 - 27 - 34 - 35 - 36
 N 2000 Set T 1/4 1/4

37 Entrance 1/4 Cor 14 78
 29 relative to T 1/4 1/4 corner corner
 First Cor on line line corner 14 78

members Saxon Stake with gas tap from Lubbock
a member 9" 18 S 14 7/8 Set 19
Dinner

Edison Mark a center 4" size for con from
which

Center 7" 18 S 5 9/32 W Set 18
Recon 10.11
D. Ginniff

Summary for Harney Smith cross alle
ers in Dec 27 T 30 SR 14 7/8 W M
After turning retrocess the see lines

and reestablished the four corners &
a 90 ft 1/4 cor Sec 22 - 29 then
S 20 000 Set T 1/4 11/4
40 00 " " Cor 1/4

60 00 " " 1/4 1/4
79 50 Eastern 1/4 Cor 27-34 of W
a return on line area equal - all com
proportional area calculation

20 41.80 Center 1/4 Cor 26 - 27
From Cor 1/4
20 20 00 Set T 1/4 1/4 4

40 20 1/4 Cor 27 - 28 48 S
a return to 1/4 Cor 20-1/8 area ex-
cess area calculation
7 From which

1/2 of 7 8" 18 S 4" 6 1/8
a 1/2 of more gas to line & side of
S 1/2 excess - course area calculation
Set 5 1/2 inch side water which a
for 14 18 W 33 6 1/8 Set 10
then W through center of S 1/2

See

2400 Set T 1/4 1/14

4000 174/14 Center of S 1/4, 80 S

6000 Set T 1/4 1/14

8000 1/4 1/14 NW Side of S 1/2

of section to 1/4 1/4 SW 1/4 corner corner
was chiselled set slots for corner from John
A. Van Oak 10' dia 73 S 40 E set
of section to T 1/4 1/14 Cor Sec. S 6 1/4
Corner-Compensation distance set slots for
which.

At 73 10 18 N 36 W Set

of 2 gable T 1/4 1/14 NW Side of NW 1/4

Corner-Section Lines

6200 Set T 1/4 1/14

3980 1/4 1/14 SW 1/2 S 80 S

of section to T 1/4 1/14 SW 1/4 corner
Corner area chiselled area set corner
mark

Corner Alder 8 73 S 80 E Set 13

Corner Alder 10 15 S 60 W 17

Lat- 42 56 N

D. O. Christian Oct-21 1836 S

Return Dec-10

St. George E S

10 14 7 30 W 14 W

Survey for Shreve & Truemy

Set 22 T 30 W 14 W

Having run the W side of Sec

and turning from it to the S 22 63

area from 1/4 cor 15-22 to 1/4 cor 22-27
84 49 area having extension Cor 1/4 area 1/4

Cor 21-22 area having previously established
line between 1/4 1/4 S end of 1/4 1/4 & 1/4 cor - Cen

1/4 corner in

2008 set T 11/14

39.89 1/4 Cor 21-22 48 S

29 section to T 1/4 1/4 area corner corner set - Min
from which

24 78 S 30 6 bear 55

From Cor center 1/4 2008

19

520.00 set stake on line

2008 From This point junction of S 49 1/4
is seen plainly since 1/4 1/4 - Cor area

since 2008 set stake Cor 1/4 1/4

29 corner 1/4 1/4 2008 line of S 46 1/4 corner

set corner point from which

22 16 18 N 15 75 bear 17

2008 set stake

2008 set stake 11395

2008 set stake 1021

2008 set stake

170 18 24

170 18 24

170 18 24

170 18 24

170 18 24



I now return to 1/4 1/4 of Sec 23

and establish by setting it S. 16 chs and, 85- on

W and setting corner stake 47 4/8 of long from

which 1/4 1/4 Cor NW 1/4 Sec 21-22

As for 36" dia 78. S 69 W Dist

a Spruce 38" " NW 1/4 Sec 21-22

23 feet
17'

I go to Cor 14-15-21-23 E. corner

2000 Set T 1/4 1/4 Cor between Sec 21-23

4000 " " 1/4 " " Confirm the line of Cor or continue
Cress

82 43

intersect Cor 21-23-26-27, 83 W.

I return to T 1/4 Cor and establish
it by proportion as per instructions, setting
it 121 chs S and 41 W

I return to T 1/4 1/4 Cor NW 1/4 Sec 21-23
and establish by setting it, 60 S and
20 W set limb post properly marked
from which

a white 18" IS N 23° W Dist 29.5 feet

From 1/4 1/4 Cor N 1/2 Sec 22-23

through rear of N 1/2 Sec 22

Set T 1/4 1/4 Cor of NW 1/4 Sec 22

off set 9.20 to plane of front "

" " " " NW 1/4 "

intersect 1/4 1/4 Cor NW 1/4 of Sec 21-22

55 NW 21 1/4 Sec 24 + 36 feet N

giving true course through Center of

N 1/2 of Sec 22 from 1/4 1/4 on W

side of Sec 21 1/4 on E side

to be S 89° 37' E

11'


2000

4000

6000

8000

I return to T 1/4 1/4 Cor NW 1/4 and
correct by setting 36.9 feet W and
27 ft N. and setting pin limb stake
marked 1/4 1/4 S with rock mound
from which

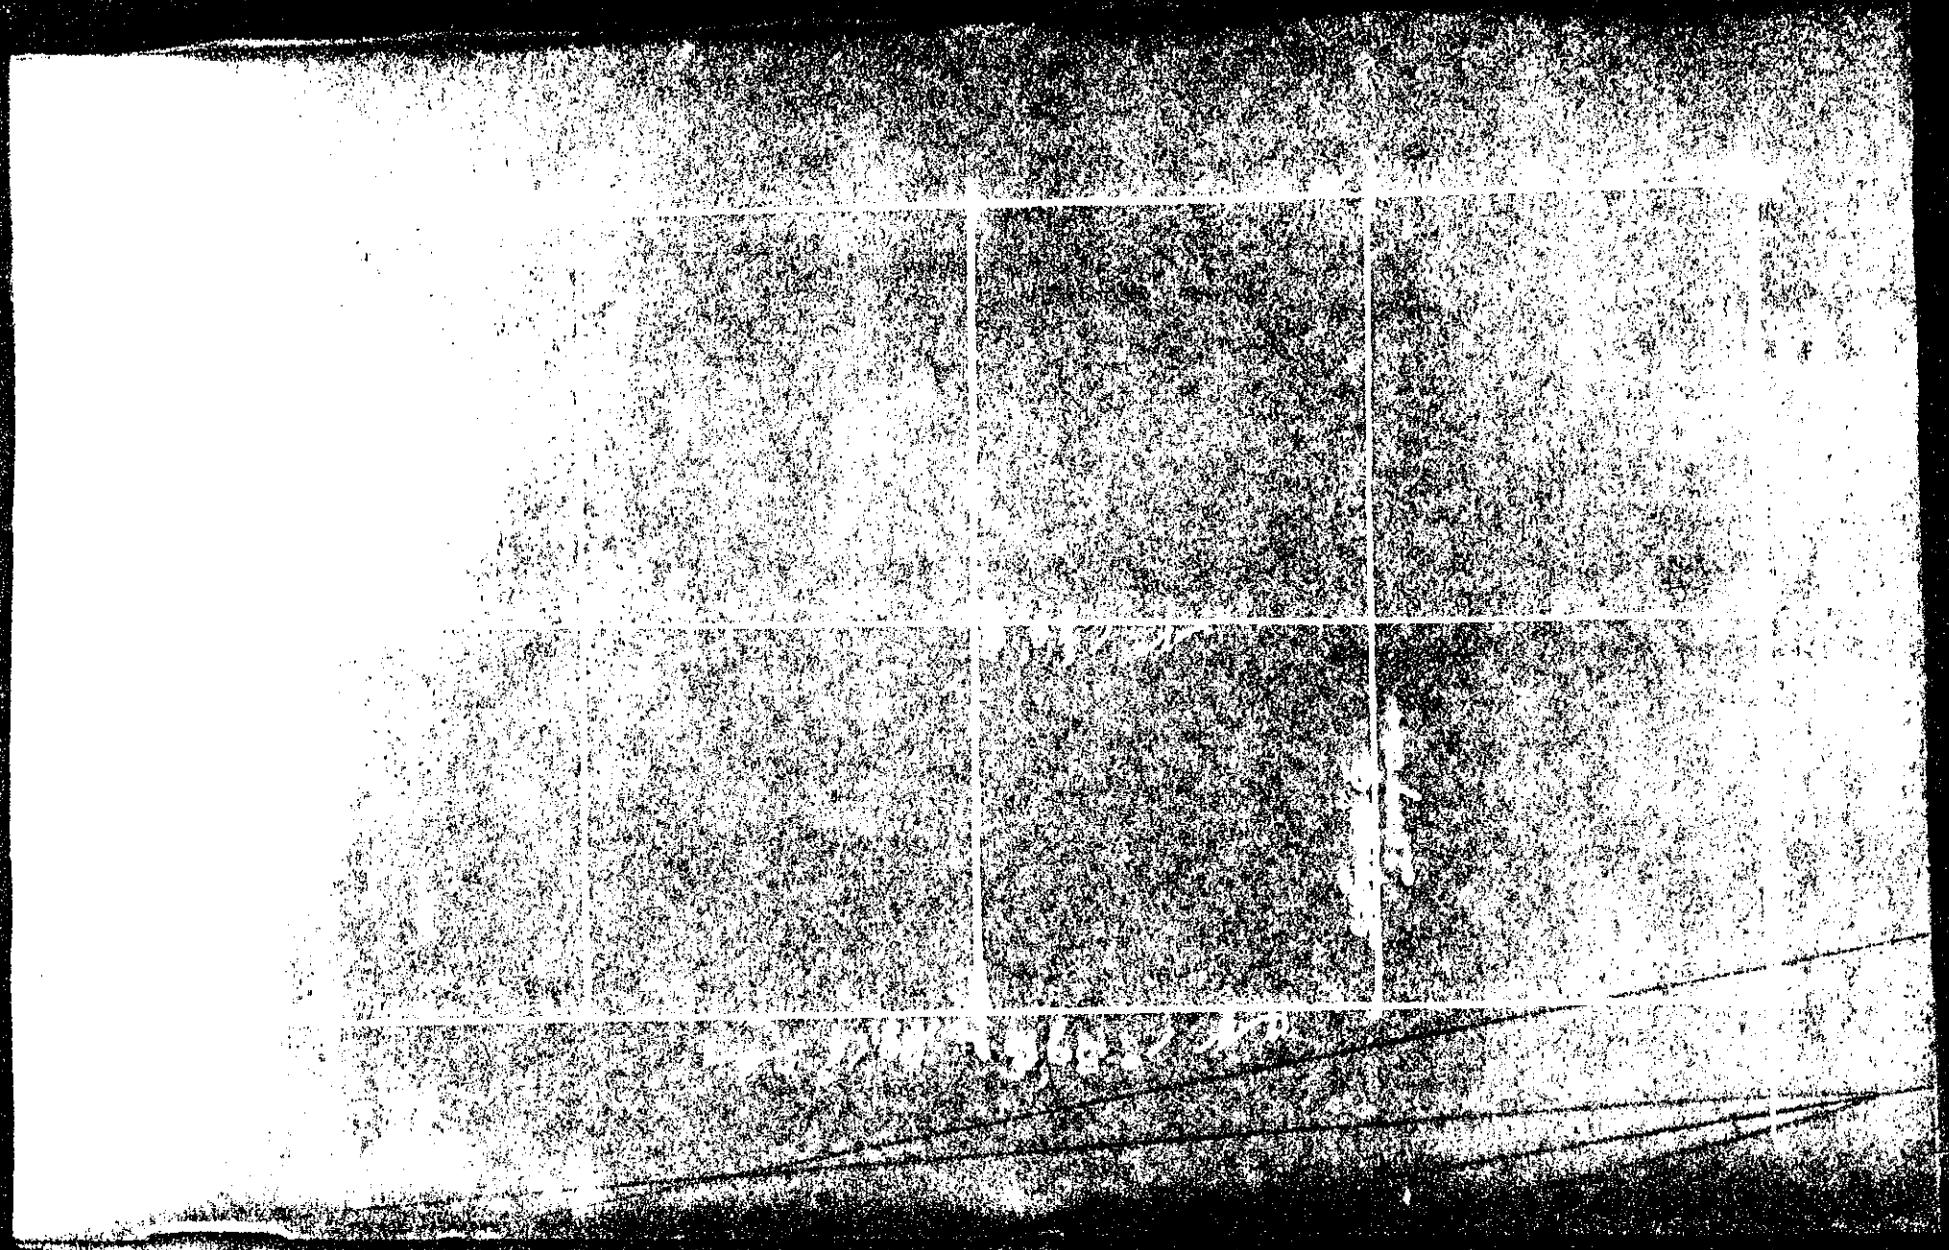



1893

Survey for A. Thorpe

Sec 26 T 36 R 15 W 1/4 M Survey began
March 17th 1922, using H. H. & G. Carley
Company with Burdett Solar Altimeter

I begin at 1/4 Cor 26-35 thence

2000 Set T 1/4 1/4 Cor

4000 " " Center 1/4 "

6000 " " 1/4 1/4 "

9910 Interser 1/4 1/4 "

" 2 J-26 2,322 6

I return to T Cor 1/4 and correct

by setting S 145° and 6 1/16 and 20-

Establish cor as per instructions

I return to T Cor 1/4 1/4 Cor of S 1/2

and correct by setting 158° and 22 S

and set cedar limb post 4x4" dia 3'

long properly marked

No trees within reach

I go to 1/4 1/4 Center of S. E. 1/4 of Sec

China

2007 Interser 1/4 1/4 Cor Cor S 1/2 172 N

True course S 87.53 E

True course through center of Sec

N 1° 39' E

Last employed

Dec " Alfa Gunnish

May 1922

42° 58'

20° 06'

Recorded April 6, 1922

A. Gunnish,

Survey Jan 14 1922

T 31 S R 14 W 21 N

To establish 1/4 1/4 cor S 1/4 Sec 21 - 22

Having been run this sec line for
1/4 sec Lockwood and Wm. Eganston
Set T 1/4 1/4 cor and finding mile to be

42' long and sec cor 8' W, & go to T
1/4 1/4 cor and correct by setting it 36' 8" S
and 6' W set for kind stake properly
marked from which

a 7' mark to 10 in 18 S 1530 E 1922

" " " " " 18 S 1530 E 1922

" " " " " 18 S 1530 E 1922

Chas. J. Eganston

Set - 1/4 1/4 cor

W. Eganston

bar

W. Eganston

42' 53"

200

123
Survey for L Knapp ST 32 S R 15-14 W M

Began Survey Jan 31 1922 L Knapp & Anne O. Knapp Chaimment

Begin at Cor Sec 29-30-31-32 Corner

N 2000 E to Set T 14/14 Cor

" 4000 " " 1/4 Secs 29-30

" 8000 " " Cor " 19-20-29-30

Can find no traces of Cor or witness trees between Secs 19-20

4000 Can find no traces of Cor or witness trees
6000 Set T 14/14

Knowing the Cor at Secs 17-18-19-20 is

entirely gone & go to S. E. Cor of Section
Concl claim N 1/4 Bq marked with a

concrete monument with one B.
tree dead but standing, a vine

maybe 6" dia being S 79° W

Art. 28 and agree with U.S.
finder notes there

The per. U.S. find notes, and in
cases - T 14/14 and N 1/4 Secs 17-

18 of W and 40 N

I now return to T Cor 19-20-29

-30 and just establish as per
and establish Cor, 24 S of T Cor

I now go to Cor 20-21-28-29

I find one bearing tree standing
I reestablish the Cor there

2000 as per his first notes Set T 14/14

4000 Set T 14 Cor Secs 20-29

7930 witness Cor 19-20-29-30 107 N

at return on low line between Secs 20-29

588446 3965 Cor establish 14 Cor

" 5947 " 14/14 E 1/2 Secs 20-29 witness

a cedar tree - 4 x 4 x 3' long from 20-29


a cedar 12" B N 77° E 107 N 35

a pine 22" S 4030 W " 141

Revised June 18 1921 L Knapp

I, John A. Jurga, being duly sworn, deposes and says that I am the owner and publisher of the Evening Beacon, a weekly newspaper, for general circulation, published weekly and regularly at Gold Beach, Curry County, Oregon; that such newspaper is made up of about four pages of five columns of text; that such newspaper was established and published as a general newspaper; published weekly and once each week for and during at least one year immediately preceding the date of the first publication of the attached notice; and has 200 bona fide subscribers living within the county in which it is published; that the notice of which the one hereto attached is a true and correct copy was published in the said GOLD BEACH REPOSER once each week for

three weeks, being published four times; the first on the Monday of Sept. 1922, and the last on the 12th day of October 1922.

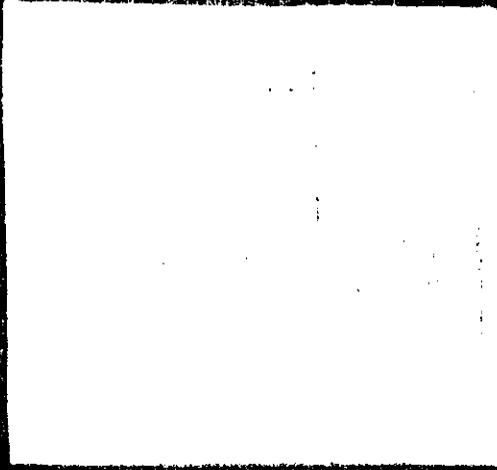

That the said notice was published in the regular and entire issue of every number of the said paper during the said period and times of publication, and that the said notice was published in the newspaper proper and not in a supplement.

That the price charged for said notice is

\$ 4.75 John A. Jurga
 Subscribed and sworn to before me this 27th
 day of Sept 1922

W. G. [Signature]
 My commission expires Dec 27-1924



Cost of Survey from the Oregon Railway and Electric Co. to 37 R 14 RT 15 K W M

B Miller	Chasman	1/2	3/4	26.00
D Miller	Chasman	2 1/2	3/4	7.00
U Turner	Chasman	4 1/2	3/4	15.75
C Miller	Chasman	7 1/2	3/4	13.25
Texas	" "	3 1/2	3/4	12.25
Buses	" "	3 1/2	3/4	12.25
Hill	" "	6	3/4	21.00
Bogardus	Chasman	5 1/2	4/4	87.00
Melville	" "	10 1/2	4/4	42.00
Woodruff	Chasman	3	3/4	10.50
Graber	" "	2	3/4	7.50
Kelley	Chasman	2	3/4	8.80
W. Schmitt	Surveyor	8.00		18.00
	Field notes			3.50
	Check on			2.50
				1.50





Oct 20th

as it is necessary to leave cor see 18-19-18
-24 to subdivide the sec 19 in accordance
with map & continue
Between sec 13-18

4000 Set T. 1/4 This 1/2 mile has been old burn wind falls
with dense brush and briars Can find no
traces of corn or witness trees
5500 Left 1/2 mile of Hunter's Creek course N 75° W 50'
6000 Right Bank of Hunter's Creek 70 wide course
7000 set plug for right
7500 set 2 1/2 cor

8000 set T cor sec 7-18-12-13, cor area

witness trees are gone

Return sec 7-12

4000 enter sec 1/4 cor 7-12 81' 4 ST 55' 7 W

Oct 22 Hairs

" 23

Return to T set 18-19-18-24 and cor-

- rec'd by Selvig 32, 4 ST 22' W
Thru

5000 Between Sec 18-19

Set T 1/4 1/4 cor

4500 enter 1/4 cor 18-19 25' W. T 144.28'

Oct 24

Return to T 14 1/4 W 1/2 sec 18-19 and cor

by set of on line line and equal dot set
fir line stake from which

a fir 36" dia B. N 68° 30' E dot 11'

This line has been very rough, with
heavy timber and dense growth of
underbrush

Through W 1/2 sec 19

S 2000 Set T 14/14 cen NW 1/4 Sec 19

4000 " " " NW 1/4 " "

6000 " " " SW 1/4 " "

Set-pling for night

Oct 25 storm

" 2000 receive notice to appear as witness in Marsfield

Nov 13 weather cleared resumed work

Set-pling T 14/14 cen SW 1/4 Sec 19

8000 - 32' Set T 14/14 NW 1/4 Sec 19-20 Thence

W 2000 Cont's set cor Sec 19-30-24-25. 14' S Y ~~8'~~

E Return 65-14/14 cor W 1/2 Sec 19-30 Thence
Thence

E 2000 Can find no broes of cor Sec 19-30

Nov 14

S 2000 2 go to cor Sec 19-30-24-25 Nov 14

400 Set T 14/14 cor on T line

6000 " " 14 " 25-30 no cor or bro

Nov 15

6000 " " 14/14

8000 " " cor Sec 30-31-25-36

Nov 16

make diligent search can find no bro
of cor or witness lines 12 cym storm bro
to quis.

Nov 20 Short-Crew

2 go cor Sec 19-30-24-25 Thence

W 2000 Set T 14/14 Sec 24-25

2900 show of Pacific Ocean
Nov 21

Can find no trace of Cor or witness trees
shore has been swept by fire & reestablished
M.C. Cor on shore of Pacific Ocean 8900 W
of Cor to see 19-30-24-15. Course and
distances as per U.S. Field notes
Nov 22

2900 E Cor 18-19-13-24

9000 Clinton

1000 Highway
2000 T 1/4 1/4

3100 Shore of Pacific Ocean as per U.S. Field
notes no witness trees are recorded

2000 Reestablish M.C. 3100 W of Cor 18-19-13-24

Nov 23

9000 E Cor T's 37 R's 14-15 T 38 R's 14-15

9000 Between See 31-36 Set T 1/2

5850 Set plug for right
Nov 24

8000 Entwined T Cor presumably Set 131 N T 59'
E. Reestablish Cor as per instruction

Chance Nov 25

7500 + 776 offset N 169' 4" to avoid bluff
1875 across State Highway

4000 offset S to line set T 1/4 see 30-31
Cannot find Cor or witness trees

6000 set T 1/4 1/4 for night

Nov 26 Storm until
Dec 2

8000 Entwined Cor 29-30-31-32 29' N T 97'
I return to 1/4 Cor and reestablish

by setting from line and equal
distances between see Cor

Dec 2

9 rails to 1/4 1/4 cor NW 1/4 Sec 30-31 and
falling on back bluff establish 1/4 N
ance 24' E of I marker N.C. from which
a fir 72" 107' 5" ~~107' 5"~~ 107' 5" 25'
a fir 18" 13 570' 6" 107'
and near 14 14 55' W "

Dec 3

ET range NW 1/2 Sec 30

2000 set T 1/4 1/4 cor

27 " taking for night

Dec 4

4000 set T 1/4 1/4 cor NW 1/2

600 set 4 station

Dec 13 returns work

6000 set T 1/4 1/4 cor NW 1/4 Sec 30

8000 center T 1/4 1/4 cor NW 1/2 19-30 800' W

29 more T 1/4 1/4 cor noting it some with

N T.S. end plus 1/2 of 36 extra wood

of Sec 30 and establish cor from which

a fir 54" Dia 78 54530 NW Adf.

I now return all to 1/4 1/4 cor and
set them on true line and square
distances between the cores following
sec lines and Markerville trees as
follows

1/4 1/4 cor NW 1/4 Sec 30

set pin from from which

a fir 48" Dia NW 80' W 120' 10

1/4 1/4 cor NW 1/2 Sec 30

set pin from which

a fir 60" Dia NW 46' W 120' 2

1/4 1/4 cor NW 1/4 Sec 30

set pin from which

a fir 72" Dia S 35' W 120' 4 1/2

14 1/4 S 1/4 25-30

fir stake from which

a fir 46" 18 S 15 7/8 Dot 19'

14 1/4 N 1/2 Sec 15-30

a fir stake from which

a fir 76" 18 S 36 6 Dot 9'

14 1/4 Cor NW 1/4 Sec 19

fir stake from where

an alder 12 18 S 78 6 Dot 18'

14 1/4 cor Cor N 7/4 Sec 19

fir post from which

a fir 12 18 N 54 6 Dot 18'

14 1/4 N 1/2 19-24

limb post from which

a spruce 24 78 N 57 36 6 Dot 38.5

14 1/4 Cor NW 1/2 Sec 19

fir post from which

a fir 14" 18 180 W Dot 8'

14 1/4 cor Cor S 7/4 19 sec 19 a fir post from which

a fir 18" 18 N Dot 8'

all partition lines except Brannings N line is covered with hemlock
of timber of spruce and fir with cedar underbrush

Recorded this 16 day of Dec 1922

var employee 28 15 6

Lat-sec cor 19-30-13-24 42 21 N

Dec Dec 11 22 30 S

D. C. Curmiff

County Surveyor

Survey for Mrs George and Mrs J W

Colbrook to equally divide what is known as the George Highberger place being NW 1/4 of sec 5 T 35 S R 14 W

I find the total area of the premises to be 156.31 acres - minus 5.35 acres previously sold from the N & corner of the NW 1/4 N 8 1/4 leaving 150.96 acres to be divided

I make calculation, then go to 1/4 1/4 cor NW corner of N 8 1/4 Sec 5 which I find enclosed with bearing trees standing thence

S 20.24 ch to cen of area set line plug
E 20.00 set division plug 3' 4" x 4" over rock 12' x 16" x 2' from which

align with 8" 18 S dot, 05 marked A.S.

return to plug set for center of area
thence

W 20.00 chs set oak stake marked D.S. from which

align 10" 18 S 38° E dot

G H Olson
Sherman Chairman

Began survey Aug 14 23 using the property
Compass with Sun - Solar alt

Recorded Aug 20 1923 D.F. Smith, C.S.

T33 R 14 T4 R 11

Survey for a quality log on Sept 1 - 28
James Lane (Chambers)

Joe Sugars

Begin on 1/4 Cor 6-31 - Chene

E 20700 Set T 1/4/14

" 30 " " 1/8/14

" 4360 Cor 5-6-31 - 32, 33, 34

I return on line correct course and dist of
Tenn Cor and establish line Cor as
follows

1/8/14 N boundary N 6 1/4 of N 6 Sec 6

Set a water worn stone on E bank of a fork of
Panther Creek from which

a Myrtle 8" 18 E 84-18

Sept-3

I return to 1/4 Cor 6-31 - Chene

S 1910 Entrance 1/4 Cor 6-7, 30 E T 80 S

E 20700 Set T 1/4/14

30700 " " 1/8/14

4030 Cor Sec 5-6-7-8, 30 S

I return to 1/8/14 T correct course and
dist on Chene

S 10700 Set stake on N 6 1/4 N 6 1/4

N 1600 Set Stake with 2 for cor
S 1000 " Stake for cor of NW 1/4 Sec 7
24 To Elk River with pin

Lat 42° 44' N
Long 102° 55' W
Recorded Sept-20-23
D. E. Summitt C.S.

Survey for Harry Johnston
of acreage lot in Sec 32 T. 32 S. R. 15 W. W. 1/4
I begin at a point 1000 E of the 1/4 1/4 cor on
NW side of SW 1/4 Sec 32. Thence S 48 W 414 chs
Set stake for initial part of island line of the
thence

S 18 E 466 chs
S 80 E 348
S 87 E 112
S 18 E 1500

S 6 E 345 Shore of Garrison Lake
I go to a point 173 S 80 E from end of
first course and run
S 16 E 174

S 15 15 W 270
74 267 Shore of Garrison Lake on

It is intended to use these lines for a road
I go to 1/4 1/4 cor NW 1/4 S 80 E Sec 32 Thence
S 45 E 238 Set post for initial of survey of lot
from which

1. A. G. I. 12 1/2 Sec 32 S 88 E Ad. 121
E 483 thence Road N. 1/2 Sec 32
S 45 E from NW cor lot 1 152

6 419 to inland line

Return to NW cor Lot Thene

S 343.66 152 E 410 to inland line

S 507.0 E 152 line to NW cor Lot 3 then

Begin at NW cor Lot 4

S 18 E 152 E 338

Begin at NW cor Lot 5

S 14 E 152 E 466

Begin at NW cor Lot 6

S 29.36 E 152 E 423

Begin at NW cor Lot 7

S 293.0 E 152 E 310

Begin at NW cor Lot 8

S 24 E 152 E 207

Begin at NW cor Lot 9

S 32.15 E 152

E 582 N 18 W 503 N 37 W 12

S 16 E 174 S 15.15 W 270 W 267 to shore of Garrison Longbar

Begin NW cor Lot 10

S 32.15 E 152 E 548 to inland line

S 10.40 E 152 E 568

Begin NW cor Lot 11

S 10.40 E 152 E 568

S 21 E 152 E 566

Begin NW cor Lot 12

S 21 E 152 E 560

Begin NW cor Lot 13

S 21 E 152 E 556

Begin at NW cor Lot 14

S 303.0 E 152 E 533

I now run N to Calabash 1/4th Cor to the
the corner line

NW 2000 Calabash 1/4th Cor by setting Cedar Stake
4' x 4' Long from Black

corner 7" B S 96° W 181'
2500 set stake marked 141/4th on bluff about
170' above the Pacific Ocean 92

Robert Johnson }
Best Williams } Chasman

Var 20 25' E

Lat 42 37 N

The corner Jan 10 1924

J. C. Currier C.S.

Survey No 18 T 36 R 14 N W 1/4

For A. Dewey to find line from SW cor
of NW 1/4 of S 6 1/4 of Sec 4 T 36 R 14 N

WM

This line has been previously established

There is trees at the SW cor and an

iron pin with the stake at the SE cor

I start at stake at SW cor of NW 1/4

of SE Thence

E S 1/4 setting plug at each flag station

I find the last flag station to be

61 S of SE cor. of NW 1/4 of SE

The intersection being so close I make

no correction of flag stations

Var 20 21' E

Lat 40 30 N

Surveyed Jan 11 1924

J. C. Currier

Survey of Boundary Claims Cor. H. Keller

Sec 27 T31R15W4N4E

Begin at Cor 24-26-33-34

N 36° 3' Chs intersect 1/4 Cor 24-26 109 E

Produce to T 1/9 1/4 which I set at 2000 corner Cor meet by setting 5' 4' chs E

I return to Cor 24-26-33-34 from

84346 2000 set T 1/4 1/4

4011 intersect 1/4 Cor, 26 S

I return to T 1/9 1/4 and set the 1/4 chs by correcting course and distance set for

Link flake properly marked

at Numb 12' Dia 18' N of Cor 24-26 12

I return to Cor 24-26-33-34-28 2' chs to is N, W Cor of Claims another marked tree

A Numblock 16' 18' 580° W Dist

05

8930 E on Cor N Boundary of Claims

2600 set for link post properly marked

can clear 9" 18' 589° W Dist 14
Chase

8134 W 1999 intersect SE Cor of Claims, 05 S

H. Hansen }
Montegny }
Chambers }

Lat 42° 53' N

Cor 24-26 E

N 90° 0' S

Recon. M. M. 2024

H. Hansen
C.S.

Survey for 8/18

T 31 R 15 N W 4 N M

1/4 Section 14 Cor Sec 27 - 28 - 29

8930.9 40.00 Set T Center 1/4 of line T Cor 1/4 Set before

about 10.87 or 11

to parallel error of line found in S 1/4

of this Sec 9 run

S 34 W 2 075 Set T 1/4 1/4 Cor ~~the line~~

line is marked by an aluminum can

The W boundary line is at 11.87 or 12

Surveying using Chain for 1/4 mile

to corner there 29 24

DG 10/18

C 1/18

Survey for John W. Williams and Others in

T²S15R15W1/4TH

I begin survey at Cor 25-26-35-36-37
I find fossil in S. side water thru Sec line
I cut 77 p in length course N 89° 33' W
throwing 1/4 Cor 26-35 and within 100
feet of same course and distance
find U.S. fossils

N 89° 33' W 19.44 set T 14 1/4 Cor Sec 26-35

" 38 89 " " 1/4 " " "

" 58 34 " " 14 1/4 W 1/2 " " "

" 77 78 " " See cor head 24-27-84-85, can find

20 feet of cor in water

throwing Cor 24-34 to be standing

I continue survey to S. side note and

after available at Cor 26-27-84-36

I find T see line in woods, 39 N

and 48 W

I go to T 14 1/4 Cor W 1/2 of Sec 26 cor

set it course and club set in

line just properly marked

A yellow flag 30' dia to N 48° W

44

Thence in T 1/2 Sec 26-35

N 20° set T 14 1/4 Cor SW 1/4 26

" 40 00 " " 14 1/4 " " W 1/2 "

" 60 00 " " " " N 7 W 1/4 "

" 80 00 " " " " W 1/2 Sec 26-28

I go to Cor 28-23-26-27

I find fossil in S. side water this sec

line is 77 1/2 in length course S 88° 49' E

I run course and find according

8846 38 88 set T 14 1/4 W 1/2 23-26

" 38 58 " " 1/4 23-26 course in line of cor

57 87

" " 14 1/4 E 1/2 Sec 26

Continues

S. 89 490 7th 1/4 Section 18 Cor 28-26-25-26 94.8 T 86.8
 2 returns to 1/4 Sec 18-26-25-26 Correct Course
 dist set post with rock mound
 2 returns to 1/4 Cor 28-26 correct course
 and chist and calculate Cor as per in-
 structions
 2 returns to 1/4 Cor 1/4 N 1/4 28-26 correct
 course and chist set for link post
 from which
 a white flag is 18 S 53 40° E dist 183

1st find line run N in Cor 1/4 Sec 26 in
 E. 1/4 Sec 1/4 Cor 1/4 N 28-26. 29.60 T 148 N
 true course to return S 1° 59' W
 2 set correct plug for Cor 1/4 Sec 26
 2 correct course of Cor of 1/4 Sec 26 set
 set Chitum post from which
 a for snag 2 1/2 dia 18 N 45° W dist 88
 a for 30" dia 18 S 10° W dist 12

Chairman (George Edwards)
 Clerk Cook

Dec 4 1888 N
 Dec 20 1888 S
 Dec 5 1875 March 7
 Recd by March 24
 D. Quiniff

Exp. 38 S. R. 14 W.

Exp. 38 S. R. 14 W. Nov. 24, 1929
Survey made for the purpose of ascertaining
the acreage South of State Highway in
the NW 1/4 of NW 1/4 of Sec. 33, T. 38 S., R. 14 W., N. 7 W.

I measure 488.4 ft. N. 9° 40' E. from the fire
Section 32 marked for B. T. by Condit
Surveyor. Dennis Cumruff in 1903, and
471.24 feet from the fire in Sec. 33, marked by
M. W. Cumruff on the same date.

From the point of intersection of these two
measurements, the tree in Sec. 32 (white fir,
now to-m. dia. bears S. 9° 10' W. 488 feet dist.
The tree in Sec. 33 (white fir now to-m. dia.,
bears S. 0° 40' E. 471 ft. dist. I did not change
the markings on these trees, which are the
B. T.'s to corner of Secs 28, 29, 32 & 33

I ran South of
fire, used 21° 05' E.

South side of Highway R.O.W. fence, descend
down open slope.

Set a hub for the S.E. corner of the tract.
Ascending

1320 ft. Top of small ridge, descend.

115 ft. Small gulch, flows South.

520 ft. Top of small backlane.

540 ft. Bottom of draw

700 ft. Gulch, begin to ascend.

830 ft. Top of spur, ascend.

980 ft. Top of spur, ascend.

1317.3 ft. Set hub for S.E. corner of tract. Thence
North Ascending

361 ft. To a point on West R.O.W. line of State Highway
Thence Along West side of Highway as follows:

N. 42° 21' W. for 600 feet

N. 71° 52' W. " 299 "

S. 81° 38' W. " 200 "

Prince

S. 67° 24' W. 466.8 feet to the point 631 feet South
of the Section Corner.
Containing 2267 Acres.

H. L. Hardenbrook & W. W. Ostlander
Chairmen. Chas. Fitzhugh
County Surveyor.

Survey for Geo. A. Pilsom in Sec. 36 T. 33
S. R. 15 W. W. M. Jan. 7, 1930

I first go to the N.E. Corner of Sec. 36. but
the stone corner has slid out of its bed.

and as there are no bearing trees to this corner
I go to the corner of Sec's 30 & 31 T. 33 S. R. 14 W.
which is a conglobnerat stone. from which

Mable 20 in dia. bears S. 8° 30' W. 16 ft. dist.

and Alder 8 in dia. bears N. 60° 45' E. 6 ft. dist.

Scribe-mark are rotted off of alder. but are
still visible on Maple. This corner as-

ending to the East field-note is 330 ft. South

of the ^{N.E.} Corner of Sec. 36. From

Ascending

320 ft. Top of ridge. Slopes S.W. descend

930 ft. Cross gulch, flows S.W. ascend.

990 " Set temporary 1/4 1/4 post.

1050 " Top of spur.

1055 " Cross Creek, flows West.

2310 " Set post for temporary 1/4 S. corner

3340 " Cross Bear Trap Cr. 15 ft. wide

4861.6" Intersect 493 ft. West of Top corner

I now go back to the post set for temporary

1/4 corner and remove it 44.2 ft. North, and 24.6 ft. E.

Setting an iron pin 1/2 in dia for 1/4 cor. to Sec. 36 -

from which a green fir 60 in dia marked 14.5. B.F. C.S.

Note!

I did not use the Const & Geodetic B.M.
for the Top corner, but a point N. 25° 00' W.
47.52 ft. from the Myrtle stump of the unre-
maining B.T. C.F.

1935

Bears N. 39° 00' E. 22.8 feet dist.

A second growth for 18 in dia. marked 1/4 S. B.T. C.S. bears N. 43° 00' W. 33.7 feet dist.

I then go to the 1/4 N. temporary corner and run it 221 ft. North, and 123 ft. East and set a 5x5" fireline for corner - marked 1/4 W.S. C.S. from which

A ground for 5 in dia. marked 1/4 W.S. B.T. C.S. bears S. 39° 15' W. 16 feet dist.

A ground for 72 in dia. marked 1/4 W.S. B.T. C.S. bears N. 6° 45' W. 61 ft. dist. Thence

Gold. Corner S.W.

Top of Spruce

Center of State Highway

Brush Creek flume N.E.

Mr. Wilson - on at corner to have the line run any farther I end the survey here in setting a 3x3" Cedar stake to mark the end of measurement.

Carl White & C. Fitzhugh, Chairmen

Chas. Fitzhugh,

C. L. Sawyer.

Survey for D. W. Miller in Sec. 30. T. 35. S. R. 14 W.

Commenced 21st E. Feb. 13, 1930

I go to the corner of Secs 29, 30, 31 & 32 T. 35. S. R. 14 W.

Found the fir S. 69° 00' W. 23.6 feet dist. from 25 in dia.

Someone has recently cut into the original block & the figures are uncorrected and plainly untrustworthy. The fir N. 32° E. 26.6 feet dist. is marked with signs of the blaze on outside of the bark is now 28 in dia. The fir S. 0° 30' E. 19.6 feet

is down, rotten stump remains. The fir N. 68° W. 7.6 feet dist. is gone entirely.

I offset 10 feet West and ran

According gentle slope

500 ft.

Top of ridge



Prof 35 S. R. 14 W. Sec 30.
For D. W. Miller (Continued)

1080 ft
1320 ft
1320 ft
1320 ft

Enter grade descending
Set a post 10 ft. to East for Miller's N.E. Corner
According for 360 ft. then descending -
Set a post for D. W. M's N.W. Corner. Thence
Set post for S.W. Corner of D. W. M's place -
- Austin & Miller, Chairmen
Chas. Fitzhugh
C. Johnson.

Survey for Ralph Pomeroy, Line bet. Sec 23 & 26
30 S. R. 15 W. N.W. M. Feb. 14, 1930.

Beginning at the corner to Sec's 23, 23.26 & 27
I found the point of the old corner from the Spruce
B.T. S 65° E. 17 ft dist. Spruce now dead, point
of old stake well preserved. I re-established the
corner by setting a 4"x4" x 37' Cedar post 18" in the
ground in the exact position of the old corner
marked S 26.57° E S.
Found also a Cedar 24-in. dia. near S 89° 30' E. 67.3' dist.
" " A Cedar 24-in. dia. marked S 23 B.T. U.S.
near N. 83° 30' E. 64.3 ft dist. No trees available
in other directions as they have been cleared
away by Wm. Perkins of the New Lake Dairy -
I run thence

58937 E.
1373
~~1373~~
1323

Through burnt opening
Set temporary 1/4" 1/4 post.
Intersect fence 172 ft North of 1/4 S. Corner between
Sec's 23 & 26. This corner is an iron pipe with
an old cast iron kettle (with the bottom broken out)
around it. Known locally as the 'kettle corner' - one
B.T. a Cedar has been uprooted, and sawn up for
fencing. But the scribe marks are still on
the butt portion of the log.
Return to temporary 1/4" 1/4 corner and measure it 115 ft
West and 86 South, and set stake for Johnson's

Sup 30 of R. 15 of

For Ralph Ramsey (Continued)

S.E. Corner

Chambers were Wallace Ramsey & C. Fitzhugh.

Chas. Fitzhugh
County Surveyor

Survey for L. N. Barber, in Sec. 15, T. 37 S. R. 15 W.

Feb. 26, 1930

Beginning at the corner of Traps 36 & 37 S. and Ranges 14 & 15 W. which was corner below the surface of the ground in an orchard with a Cherry tree S. 61° by 10 the dist marked on the bark for B. F. Jones West

To N.W. corner of lot #1, Sec. 15, Thence South

1320 ft. Iron line with a fence and to be the South boundary of the M. Riley Estate, Thence West

586.6 ft. To meander line. Thence S go back East on the line for 348.3 ft. Thence North for 100.55 ft.

Thence East 220 ft. to Right of way line on West side of State Highway. Thence N. 60 S. E. along East line

of way line for 336.3 ft. to the S.E. corner of Gold Beach High School East. Thence S 85 S 52 W. along

South boundary of High School lot for 118 feet to the S.W. corner of High School lot. Thence N. 17 W.

along West boundary of High School lot for 401 ft. Thence West 225.25 feet to meander line. West

boundary of lot #2 of Sec. 15, T. 37 S. R. 15 W. Thence

The meander line was not mentioned, but was calculated to be S. 2° 53' E. 832.5 feet, making 736.00 in the tract brought by L. N. Barber.

C. H. Bailey & L. N. Barber were Chairmen

Chas. Fitzhugh
County Surveyor

Crescent City, California,
 January 21, 1924.

Mr. A. Cunniff,
 Good Beach,
 Oregon.

Dear Sir:—

Your letter of the 18th inst.
 in regard to Mr. John Hodine's application
 to have the boundary surveys between
 his property and mine in T. 31 S., in
 Curry County, was received this evening.
 In reply I hereby authorize
 you to make the survey.

Very sincerely,
 Mrs. Lee Tyler



May 17, 1930.

Beginning at the corner to Secs 17, 18,

19 & Ed T. 33 S. R. 14 W. N. W. Jan. used $21^{\circ}15'E$.

This corner is a mound of stone.

I ran South - ascending

Top of raise - nearly level

475 "

Begin to descend

1050 " Bald Mountain Creek - flows West.

1125 " Middle Elk road - ascend

1320 " Set temporary stake for $1/4$ corner

1650 "

South side of Patton's Bleaching

1980 "

Set a stake for temporary corner on south boundary of H Patton's place

2085 "

Creek flows N. W.

2613 "

 $1/4$ Section Corner between Secs 19 & 20

I now go to the temporary corner set at 1980 ft.

and now come 2025 ft North for true place

for Patton's South boundary - and run East

from this corrected corner.

Top of spur, thence parallel to backbone, near top

slope to North.

660 " Set a 4"x4" post for Henry Patton's S.E. corner.

and run North

65325 Set a 4"x4" post for the N.E. corner of Patton's land

in Sec. 20. Thence I ran West.

660 Intersect Section line 17 ft North of the

temporary corner set at 1320 ft. Set a 4"x4" post -

I then go to the post on section line at the

South boundary of Patton's place and run

West. descend.

295 ft. Cross small Cr. flows NW. ascend.

400 ft. Cross trail

640 " Top of point descend.

1080 " Road up middle Elk.

1320 " Set a 4"x4" post for S.W. corner of Patton's land.

Thence North between Patton & Mather, ascend

65325 " Set a hub.

10474 " offset 75 ft. to West, to avoid Bald Mt. Creek.

June 5, 1930
Humboldt Co. Cal.

the 1/2 corner between Sec's
1 & 2. There is a cross in the
center of the
corner. The
corner is 29° 15' E.

Edson Co.
Staplehill

part of South of the trail up Edson Co.
part
and

Edson

flows South -
East

South. Record -

McConen and ran North, according
to record

Edson Co.

Edson } Claimmen

Charles Hugh
Edson

Edson

17 Feb 1905

Go to the canyon
R. 14 N. 14th E. 1st
has been built on top of

found the fragments
found. Found

Marked S. 34. T. 30 R. 14 E.

In Alder 18 in dia. marked

In Alder 16 in dia. marked

Ran South, for

Top of sharp slopes

Chief road of creek

Cross road of creek

Set post for temp. com.

Cross Creek flume S. 34

Cross same Creek flume S. 34

Floras Creek - across

Intersect 130 ft East of

T. 31 S. R. 14 W. and down

by D. L. Buckingham, in

Now go to the temper.

12.5 ft South, and 67.5 ft

post for U.S. Com. for

12" dia. - marked 45. 45. 45

A green first dia. marked 45. 45. 45

Buff. Coyd

C. E. F. 1905

1905

137 ft.

79 ft.

1080 ft.

2640 "

2960 "

3420 "

4900 "

5505 "

Survey for Harold Sydnam, Sept. 1, 1930.
 For the purpose of getting the acreage on East
 side of State Highway, in the NW 1/4 of Sec. 27—

Beginning at the 1/4 corner between Sec's
 27 & 28 which is an iron pipe with brass
 cap. I ran East through timber & brush

To a point on East side of Highway in R.W.
 line— Thence N. 39° 50' E. 478 feet along R.W. line

"	N. 37° 10' E.	273	"	"
"	N. 28° 30' E.	262	"	"
"	N. 20° 20' E.	232	"	"
"	N. 12° 30' E.	220	"	"
"	N. 4° 28' E.	1397.1	"	"
"	East	711.7	"	To the L corner

between Sec's 26 & 27.

I did not run the East boundary on
 the South side of this tract but by calculation
 the East side is 2640 feet and the South
 side is 1544.8 feet making the area of
 the tract 56,044 ac.

Fred Adolphsen } Chained
 C. Fitzhugh

Chas. Fitzhugh,
 County Surveyor

Survey for Curry County June 19, 1931.
 Survey made to ascertain if timber was being
 removed from the S.E. of Sec. 20.

Beginning at the $\frac{1}{4}$ corner between Sec's
 19 & 20 T. 33 S. R. 14 W. I ran East. Van used S 95 E

Over creek 4 ft wide from NW.

Log roadway

Top of spur, descend

Logging road

Offset 182 ft. South to avoid precipitous bluff.

East on offset ascending

offset 182 ft North rejoin line.

A post set by Forester is 30 ft. South. Offset 40 ft. S

to this post and ran East along cut-out line

Beginning the chaining anew.

Top slope, level

Brink of hill, descend

bottom of slope

1765 Cross pile of Cedar logs (about 50 logs)

1960 On gravel bar, Bald Mt. Creek

Foot of Mountain ascend

2550 a point 5 ft North of Madrone marked S. 20 B. T.

Could not find the $\frac{1}{4}$ corner between Sec's
 20 & 21 as we did not have the U. S. Gov't

notes for it.

O. C. Ponting } Chairman

Davis Ponting }

Chas. Fitzhugh

Co. Surveyor.

Survey for L. M. Tucker

Dec 19, 1930.

I go to the corner of Twp 40 & H. S. R. 12 N. found scribble marks on stump (sawn down) now spindle. B.T. discernible, other marks have been above where the tree was down. South from corner (as used 2035 E. ascending hill.

1320 ft Raw East.

1340.4 ft an iron pin at intersection of E & W fence with N & S fence

2653.9 ft An iron pipe the N.W. corner of L. M. Tucker's land. Thence South between Tucker & Brown

Descending -

600 ft Left a stake for point to run East from Cross Winchuck road.

1260 ft Set stake for Tucker S.W. corner. and in 1/4 - 1/4 setting some stakes for fence line as far as it runs to creek

1657 ft I now go to the hole at 600 ft and run East offset 100 ft North to avoid house.

1640 ft End of survey, which was to determine in what legal subdivision the tract he had sold to Richard Hanson.

Chambers { Brown's first name }
{ @ Fitzhugh }
Chas. Fitzhugh
County Surveyor.

For School District No. —

Feb 5, 1931

Beginning at a point 732 feet North of the
N.S. corner on South side of Sec. 35. T. 40 S. R. 137 N.
said point being 20 ft North of the center line
of The Cities Market Road.

Run N. 70° 0' E. 190.3 feet. Thence

North 216 " "

West 178.82 " "

South 291.2 " To pt. of beginning

Containing one Acre.

Dud Jackson } Chairman

Chas. Fitzhugh }
Chas. Fitzhugh

Chas. Fitzhugh

C. Surveyor.

T. 33 S. R. 15 N. Sec 5.

August 15, 1931

Survey for U.S. Coast Guard. Per Andre Finarchy.

Go to the corner of Sec's 5, 6, 7 & 8 T. 33 S. R. 15 N.

The original D.T. & pine N. 65° E. 220 lbs, is now
down. blaze still shows, but serice marks are
blurred and not discernible. The corner has been
reestablished by a C.S. Stake and iron pipe are
standing. Iron East. Var. used 21° 15' E.

482.4 ft. 2 feet 125 ft. North. East on offset.

718.6 ft. offset 313 ft. farther North East on this offset

1014.1 ft. Set a 1/8" iron bolt, and ran S. 70° 0' E. for 44.3 ft. to

line between Sec's 5 & 7 setting an iron bolt at this point.

Then return to the point 1014.1 ft. on offset. Set timber East

4016.4 ft. or 14-15.7 ft. in all. setting a 1/8" iron bolt, at end of
survey.

Elliott Woodworth } Chairman

Chas. Fitzhugh }
Chas. Fitzhugh

Chas. Fitzhugh

County Surveyor

T. 40 S. R. 137 N. Sec. 33.

Survey for Doyle Harwin, Aug. 30, 1931
Beginning at corner on Top line of Sec. 33
32 x 33 S. 40 S. R. 137 N. 77 W. which is a fir limb
Planted at intersection of fences

Row East
Thence North

Center of old Co. road.

To a point on South side of Chetco Market road
Thence paralleling said Market road

" S. 44° 30' W. 228.4 feet

" S. 32° 15' W. 531.1 "

" South 644.5 " To place of beginning
Containing 9.80 acres

(As Assessed }
Chas. Fitzhugh }
Fitzhugh }
Chas. Fitzhugh }
County Surveyor }

T. 31 S. R. 157 N. S. 16-

Survey for B. L. Barkwell, Oct. 18, 1931.

To mark the corner on line between Sec. 16 & 17
S¹/₂ (60 acres) of NW¹/₄ of S. 16.

I go to the corner of Secs 8, 9, 16 & 17 S. 13 S. R. 15 N.
Measure out 56.1 ft. N. 52° E. from the vic. B.
220 in 36 in. dia. and set hub for starting point
Could find no trace of pine B. T's called for in
field notes.

Row South Mar. used 21' 15" E.

Set a stake for N.W. corner of 20 acre tract

Set a stake for S.W. " " "

- Fredenburg }
B. L. Barkwell }
Chairman

Chas. Fitzhugh
County Surveyor

Survey for Dan Opley Oct. 30, 1931.

Beginning at the 1/4 corner between Secs 28 & 29 T. 28 S. R. 15 W. Draw West Ditch on East side of State Highway

Thence N. 5° 20' E. 539.33 ft. along ditch on East side of Highway and setback 16 ft. to the East for C.E. Whitworth's NW Corner & Dan Opley's S.W. corner ^{Beginning of} Thence East 172.7 feet " North 272.25 " " West 147.3 " To R.O.W. line of Highway " S 52° W 273.4 " to place of beginning

Containing One Acre.

L. Aickock }
Chas. Fitzhugh } Chairman
Chas. Fitzhugh }
Chas. Fitzhugh }
Co. Surveyor.

T. 31 S. R. 15 W. Sec. 10

Survey for Spangler & Bayer Nov. 2, 1931 -

for the purpose of staking out a two acre tract for Bayer lying on West side of Highway.

Beginning at the 1/4 corner between Secs 10 & 15 T. 31 S. R. 15 W. which is a Convent monument in the road. Draw East. Var. used, 21° 15' E. To a point 11.7 ft. West of State Highway Thence N. 13° 42' E. parallel to Highway for 1850.7 ft. and set a stake 18.3' West for the S.E. Corner of the two acre tract sold to Bayer.

Thence N. 13° 42' E 429.64 feet along West R.O.W. line " West 259.59 " " South 417.42 " " East 157.83 " To S.E. corner of tract

Containing 2 Acres.

Bayer & C. Fitzhugh }
Chas. Fitzhugh }
Chas. Fitzhugh }
Chas. Fitzhugh }
Co. Surveyor.

7284 ft

T. 38 S. R. 14 W. Sec 28.

Govt Cook & Miller Dec 1, 1931

For the purpose of determining the line between the N.E. 1/4 and the S.E. 1/4 of Sec. 28.

Beginning at the 1/4 corner between Secs 28 & 29 T. 38 S. R. 14 W. Which is a stake in a mound stone, marked 1/4 S. C. S. Iron South corner 28.

Ascending steep hill.

Top of spur, thence along steep side hill slope 90°

Flat rolling country

Cross Creek, flows N.W. —

Marked the point with a cedar stake, and sighted a line East, blazing the line as far as the cedar timber has been cut.

Henry Kamert }
M. Anderson } Chairmen

Chas. Fitzhugh

County Surveyor

250 ft

500 ft

2450 ft

2640 ft

Survey for Fred Campbell et al.

March 3, 1930.

Beginning at the corner of lots 1 & 2 on North side of Sec. 1 T. 37 S. R. 15 W. I set corner being a hub set by me on Feb. 24, 1930 during a survey made for L. N. Hauker. I ran South on random. Van used 21° 15' E.

150 Cross Cr.

1339.8 ft Set hub as marker for temporary $\frac{1}{4}$ corner

1593.9 ft Set nail in Highway for temporary point

1989.9 ft Set hub. for temporary point

2289.8 ft Offset 29' East to avoid trees South on offset.

2659.8 ft Set hub. for temporary $\frac{1}{4}$ corner on offset.

I now go to the $\frac{1}{4}$ Sec. corner on East side of Sec. 1 T. 37 S. R. 15 W. From the spruce stump said to be a bearing tree to said corner. I measure 2612 ft S 65° W. to point for $\frac{1}{4}$ S corner. A small stake is already in position at this point

Offset 124.8 feet South to avoid trees & brush, and ran

West on offset

350 ft Offset 70 ft North and ran West on offset.

537 ft Offset 54.8 ft North and regain line

West on line

220 Comes 40 ft West of the temporary hub set on offset at 2659.8 ft. (See above)

Return to temporary point set for $\frac{1}{4}$ corner and continue South on offset 29 ft East of random line

3139.8 ft Offset 7 feet West to be in fence line.

3979.8 ft Offset 22 ft West and set hub for temporary $\frac{1}{4}$ corner. Thence South on line.

South

43574.8 ft

44574.8 ft

45374.8 ft

49587.2

South

5387.2

at 1339.8 ft

at 1570.9 ft

at 1989.9 ft

at 2659.8 ft

at 3979.8 ft

Deflected 100' to right, for 100 ft.

Deflected 200' to left for 100 ft.

Deflected 100' to right for this remaining line
offset 35 ft. West to avoid tree.
on offset.Intersect $1/4$ corner 3 ft West of point found
by measuring 462 ft East from Meander
Corner between Secs 1 & 12 T. 37 S. R. 15 W.Thus making random line intersect 3 ft
East of $1/4$ corner had it continued South
without affecting the 35 ft. West.Now return and set the temporary points to their
true positions, as follows at the first point
moved it 8.01 feet West and set Iron pipe.Set 8 in spike flush with surface of Highway 96
West of temporary point, also a stake at West fence
34.8 ft. distant from spike.Set an iron bolt 12.04 ft. West of temporary hole.
Set an iron bolt 45.1 feet West of temporary hole
which was on 29 ft. East offset.From this bolt a nail in the S.E. corner of meander
bears N. $5^{\circ} 03'$ W. 73.15 ft. distant, and a nail in
light pole bears N. $74^{\circ} 23'$ E. 36.75 ft. distant.Moved temporary hole 6.3 ft. North, and 24 ft.
West and set iron pipe for $1/4$ corner.I then go to the meander corner between
Secs 1 & 12 T. 37 S. R. 15 W. and drive a galvanized
pipe at East foot of meander corner
and a $1/4$ in iron pipe 140 feet East of the
meander corner.

Present - Chas Doyle & Amr Bean.

Chaimers: H. C. Woodward & Fred. Coughlin.

Chas. Fitzhugh, Co. Surveyor.

